

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[2293585](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




Extract from the online catalog

UM 45-FLK50/ZFKDS

Order No.: 2293585

The illustration shows a 20-position version

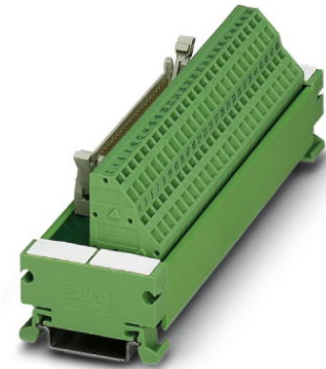

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2293585>

VARIOFACE module, with spring-cage connection and flat-ribbon cable plug connector, for mounting on NS 35/7.5, 50-pos.



Commercial data	
GTIN (EAN)	 4 017918 120481
sales group	I001
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 281 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
06/29/2006



<http://www.download.phoenixcontact.com>
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General data	
Nominal voltage U_N	< 50 V AC
	60 V DC
Max. current carrying capacity per branch	1 A
Number of positions	50

UM 45-FLK50/ZFKDS Order No.: 2293585

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2293585>

Width	151 mm
Height	45 mm
Depth	50 mm
Status display	No
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	500 V AC (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Pollution degree	2
Surge voltage category	II

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Spring-cage connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Stripping length	8 mm
Connection 2	Flat-ribbon cable connection
Number of connections	1
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	50

Certificates / Approvals



Certification

CUL, GOST, UL

UM 45-FLK50/ZFKDS Order No.: 2293585

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2293585>
Accessories

Item	Designation	Description
Cable/conductor		
2289065	FLK 50/EZ-DR/ 50/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 0.5 m
2299097	FLK 50/EZ-DR/ 50/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 0.5 m
2289078	FLK 50/EZ-DR/ 100/KONFEK	Round cable sets, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 1 m
2299107	FLK 50/EZ-DR/ 100/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 1 m
2289081	FLK 50/EZ-DR/ 150/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 1.5 m
2299110	FLK 50/EZ-DR/ 150/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 1.5 m
2289094	FLK 50/EZ-DR/ 200/KONFEK	Round cable sets, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 2 m
2299123	FLK 50/EZ-DR/ 200/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 2 m
2289104	FLK 50/EZ-DR/ 250/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 2.5 m
2289117	FLK 50/EZ-DR/ 300/KONFEK	Round cable sets, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 3 m
2299136	FLK 50/EZ-DR/ 300/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 3 m
2289120	FLK 50/EZ-DR/ 350/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 3.5 m
2289133	FLK 50/EZ-DR/ 400/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 4 m
2299149	FLK 50/EZ-DR/ 400/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 4 m
2289573	FLK 50/EZ-DR/ 450/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 4,5 m
2289586	FLK 50/EZ-DR/ 500/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 5 m
2289599	FLK 50/EZ-DR/ 550/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 5,5 m
2289609	FLK 50/EZ-DR/ 600/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 6 m
2299152	FLK 50/EZ-DR/ 600/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 6 m

UM 45-FLK50/ZFKDS Order No.: 2293585

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2293585>


2289612	FLK 50/EZ-DR/ 650/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 6.5 m
2289625	FLK 50/EZ-DR/ 700/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 7 m
2289638	FLK 50/EZ-DR/ 750/KONFEK	Round cable set, with two 50-pos. female connectors (1:1 connection), for connecting 32 channels, cable length: 7.5 m
2289641	FLK 50/EZ-DR/ 800/KONFEK	Round cable sets, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 8 m
2299165	FLK 50/EZ-DR/ 800/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 8 m
2289654	FLK 50/EZ-DR/ 850/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 8.5 m
2289667	FLK 50/EZ-DR/ 900/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 9 m
2289670	FLK 50/EZ-DR/ 950/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 9.5 m
2289683	FLK 50/EZ-DR/1000/KONFEK	Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 10 m
2299178	FLK 50/EZ-DR/1000/KONFEK/S	Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 10 m
2295046	FLK EZ-DR-S.../.../...	Round cable, with preassembly, shielded, variable cable length
2295059	FLK EZ-DR.../.../...	Round cable, with preassembly, not shielded, variable cable length

Tools

1204504	SZF 0-0,4X2,5	Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip
---------	---------------	--

Diagrams/Drawings

Circuit diagram

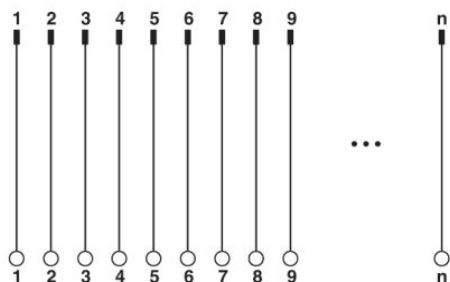

UM 45-FLK50/ZFKDS Order No.: 2293585

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2293585>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;