

Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[OSTH2020080](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

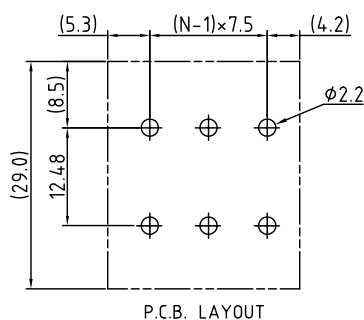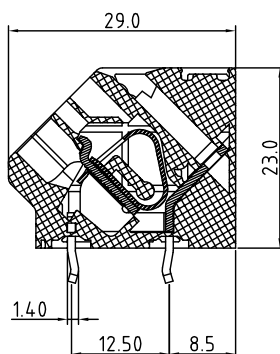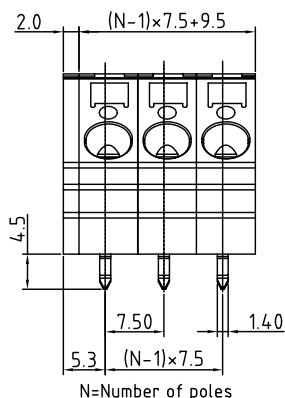

P.C.B. LAYOUT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material:

- Terminal body
- (Contact pin): Brass
- Wire guard: Stainless steel
- Surface of solder tail: Tin plated
- Insulator(housing): Thermoplastic (UL94V-0)

Electrical:

- Voltage rating: cULus 300V
- Current rating: 10A
- Wire range:
 - Solid wire(AWG): 10-24
 - Stranded wire(AWG): 10-24
- Wire strip length: 10-11mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec

- Safety Approval: cULus

RoHS Compliant

PART NUMBER:

OSTH2XX0080

No. of Poles	COLOR
02: 2 Poles	0: Black
03: 3 Poles	5: Green
...	6: Blue
24 24 Poles	8: Grey (Standard)



TITLE: OSTH2 7.5mm Series							
PART NO.	OSTH2XX0080			DWG NO.	OSTH2XX0080.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
Shi Jun 2006.11.07	Marvin 2006.09.26	Aaron 2006.05.31	Aaron 2006.05.31		X. ±0.50		
					X.X ±0.30		
					X.XX ±0.10		
					X* ±T		
					UNIT: mm		
					SCALE: NONE		
					SHEET: 01/01		
					REV.: B		