

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panasonic Electronic Components](#)  
[ESB-92D21B](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)


# Panasonic

## Power Switches/ESB92D

### Compact Push Type Power Switches

Malaysia

Series: **R2**  
Type: **ESB92D**

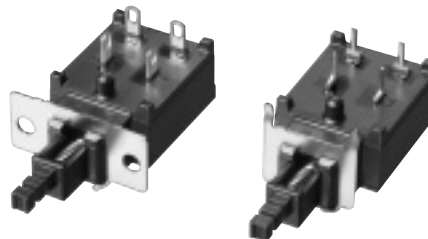

High reliability type (applicable to practical rates of usage)


#### ■ Features

- Available for both DPST and SPST  
Available for equipment subject to inrush current (128 A)
- Special heat resistant structure
- Meets the world's major safety standards
- Rapid switching structure, applicable to IEC60065 6th edition (Refer to the notes.)
- Cadmium-free contact

#### ■ Recommended Applications

- AV Equipment: TVs and audio systems
- OA Equipment: PCs, monitors, printers, etc.

#### ■ Explanation of Part Numbers

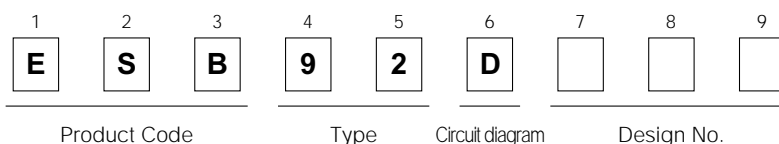

#### ■ Specifications

Rating	TV-5, 5 A 250 Vac (UL, CSA) 4 A/128 A 250 Vac (European standards)		
Safety Standards	UL, CSA, VDE, BEAB, SEMKO, FIMKO, SEV, DEMKO, NEMKO		
Circuit Diagram	DPST		
Operating Force	Circuit	Lock Travel	
		1.5 mm	2.5 mm
	DPST	8.0 N±3.0 N	8.0 N±3.0 N
Travel	Lock Travel: 2.5 mm, Full Travel: 3.5 mm		
	Lock Travel: 1.5 mm, Full Travel: 2.5 mm		
Minimum Quantity/Packing Unit	25 pcs. Polyethylene Bag (Bulk)		
Quantity/Carton	300 pcs.		

\* OA equipment: PCs, monitors, printers, etc.

**Panasonic**

Power Switches/ESB92D

■ Dimensions in mm (not to scale)

**No. 1**  
Solder lug type

Part No.	Travel		Circuit Diagram
	Lock	Full	
ESB92D27B	2.5 mm	3.5 mm	DPST
ESB92D17B	1.5 mm	2.5 mm	

\* Mounting Spec with M3 Top

**No. 2**  
PWB mount type

Part No.	Travel		Circuit Diagram
	Lock	Full	
ESB92D21B	2.5 mm	3.5 mm	DPST
ESB92D11B	1.5 mm	2.5 mm	

Recommended PWB piercing plan  
(t=1.60±0.05)  
View from terminal side