

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Z-Hook](#)
[204-18W-S](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: X100W/COLOR HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6. AVAILABLE IN TEN COLORS. CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.00001 [0.000254] THICK MINIMUM. SPRING: STAINLESS STEEL TYPE 302.

- P/N: W-200/COLOR 22AWG 65X40 TINNED COPPER 0.070 [1.78] O.D. PVC INSULATION AVAILABLE IN TEN COLORS.

- PERFORMANCE
 MAXIMUM CURRENT: 2.5 AMPS
 MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.
 MAXIMUM TEMPERATURE: 221°F (105°C)

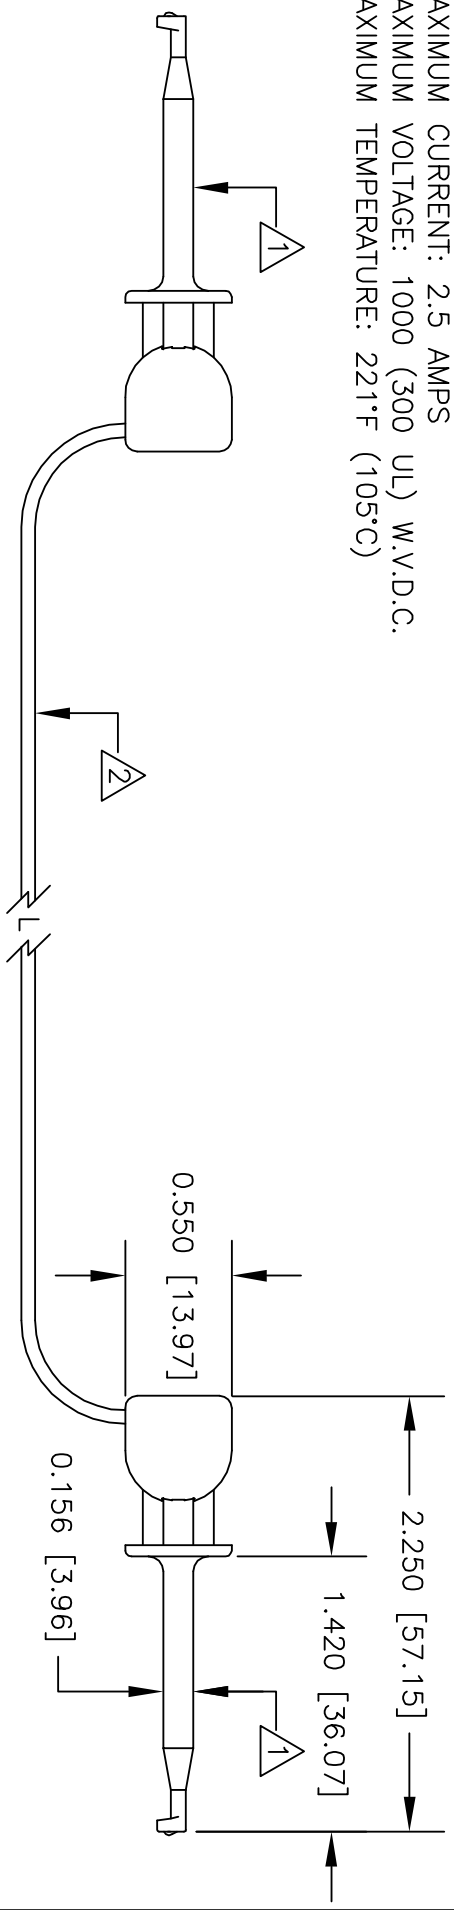

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION	
±	.XX ±	DRAWN	R.L.	DATE	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A. MINI-HOOK (X100W) JUMPER
±	.XXX ±	APPROVALS			
±		APPROVED BY			
MATERIAL SEE NOTE.		FINISH SEE NOTE.		SIZE CODE IDENT NO. DRAWING NO.	
NEXT ASSY USED ON		APPLICATION DO NOT SCALE DRAWING		A 08505 204W SCALE 1:1 SHEET 1 OF 1	
				REV.	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT.

LTR	DESCRIPTION	REVISIONS	DATE	APPROVED