

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[1755545](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Extract from the online  
catalog

## MSTBVA 2,5/ 5-G

Order No.: 1755545

The figure shows a 10-position version of the product



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1755545>

Header, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5 mm,  
Number of positions: 5, Color: green, Assembly: Soldering

### Commercial data

|                          |                    |
|--------------------------|--------------------|
| EAN                      | 4017918029128      |
| Pack                     | 50 pcs.            |
| Customs tariff           | 85366990           |
| Weight/Piece             | 0.00252 KG         |
| Catalog page information | Page 251 (CC-2009) |

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Dimensions / positions

|                     |          |
|---------------------|----------|
| Length              | 8.6 mm   |
| Pitch               | 5 mm     |
| Dimension a         | 20 mm    |
| Number of positions | 5        |
| Pin dimensions      | 1 x 1 mm |

MSTBVA 2,5/ 5-G Order No.: 1755545

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1755545>

|                                    |        |
|------------------------------------|--------|
| Hole diameter                      | 1.4 mm |
| <b>Technical data</b>              |        |
| Insulating material group          | IIIa   |
| Rated surge voltage (III/3)        | 4 kV   |
| Rated surge voltage (III/2)        | 4 kV   |
| Rated surge voltage (II/2)         | 4 kV   |
| Rated voltage (III/2)              | 320 V  |
| Rated voltage (II/2)               | 400 V  |
| Connection in acc. with standard   | EN-VDE |
| Nominal current $I_N$              | 12 A   |
| Nominal voltage $U_N$              | 250 V  |
| Maximum load current               | 12 A   |
| Insulating material                | PBT    |
| Inflammability class acc. to UL 94 | V0     |

**Certificates / Approvals**


Certification

CB, CSA, CUL, GOST, UL, VDE-PZI

**CSA**

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 300 V |
| Nominal current $I_N$ | 10 A  |

**CUL**

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 300 V |
| Nominal current $I_N$ | 10 A  |

**UL**

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 300 V |
| Nominal current $I_N$ | 10 A  |

MSTBVA 2,5/ 5-G Order No.: 1755545

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1755545>
**Accessories**

| Item | Designation | Description |
|------|-------------|-------------|
|------|-------------|-------------|

**Assembly**

|         |         |                                                                                    |
|---------|---------|------------------------------------------------------------------------------------|
| 1755477 | MSTB-BL | Keying cap, for forming sections, plugs onto header pin, green insulating material |
|---------|---------|------------------------------------------------------------------------------------|

**Marking**

|         |                       |                                                                                                                                                                             |
|---------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0804183 | SK 5/3,8:FORTL.ZAHLEN | Marker card, printed horizontally, self-adhesive, 12 identical decades marked 1-10, 11-20 etc. up to 91-(99)100, sufficient for 120 terminal blocks                         |
| 0805072 | SK 5/3,8:SO           | Marker card, special printing, self-adhesive, labeled acc. to customer requirements, 12 identical marker strips per card, max. 25-position labeling per strip, color: white |
| 0805409 | SK 5/3,8:UNBEDRUCKT   | Marker cards, unprinted, with pitch divisions, self-adhesive, 10-section marker strips, 12 strips per card, can be labeled with the M-PEN                                   |

**Plug/Adapter**

|         |         |                                                                                                      |
|---------|---------|------------------------------------------------------------------------------------------------------|
| 1734401 | CR-MSTB | Coding section, inserted into the recess in the header or the inverted plug, red insulating material |
|---------|---------|------------------------------------------------------------------------------------------------------|

**Additional products**

| Item | Designation | Description |
|------|-------------|-------------|
|------|-------------|-------------|

**Assembly**

|         |                |                                                                                                                                                   |
|---------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| 1909249 | FKCT 2,5/ 5-ST | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 5, Connection type: Spring-cage conn., Color: green |
|---------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------|

**General**

|         |                      |                                                                                                                                                   |
|---------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| 1910380 | FKC 2,5/ 5-ST        | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 5, Connection type: Spring-cage conn., Color: green |
| 1909744 | FKCVR 2,5/ 5-ST      | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 5, Connection type: Spring-cage conn.               |
| 1910063 | FKCVW 2,5/ 5-ST      | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 5, Connection type: Spring-cage conn.               |
| 1779440 | FRONT-MSTB 2,5/ 5-ST | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 5, Connection type: Screw connection                |


MSTBVA 2,5/ 5-G Order No.: 1755545

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1755545>


|         |                  |                                                                                                                                                  |
|---------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| 1754504 | MSTB 2,5/ 5-ST   | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 5, Connection type: Screw connection, Color: green |
| 1765807 | MSTBP 2,5/ 5-ST  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 5, Connection type: Screw connection, Color: green |
| 1779864 | MSTBT 2,5/ 5-ST  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 5, Connection type: Screw connection, Color: green |
| 1792045 | MVSTBR 2,5/ 5-ST | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 5, Connection type: Screw connection, Color: green |
| 1792553 | MVSTBW 2,5/ 5-ST | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 5, Connection type: Screw connection, Color: green |
| 1768794 | SMSTB 2,5/ 5-ST  | Plug component, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 5, Connection type: Screw connection, Color: green |

## Diagrams/Drawings

Drilling plan/solder pad geometry

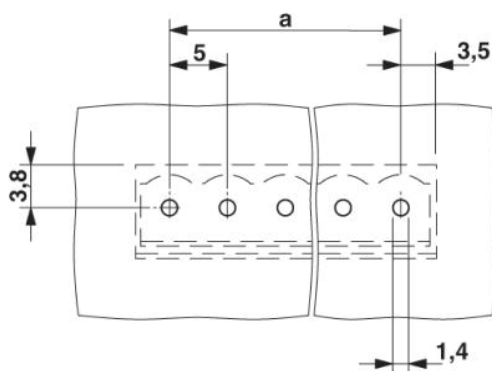

Dimensioned drawing

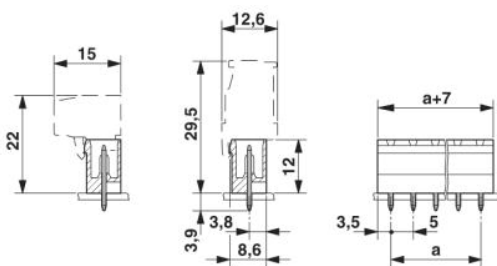

MSTBVA 2,5/ 5-G Order No.: 1755545

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1755545>

---

#### Address

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;