

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Diodes Incorporated](#)
[ZDC833ATA](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SOT23 SILICON DUAL VARIABLE CAPACITANCE DIODE

ZDC833A

ISSUE 2 – JANUARY 1998


FEATURES

- * VHF to UHF operation
- * Common Cathode Dual Diode
- * Monolithic construction

APPLICATIONS

- * Mobile radios and Pagers
- * Cellular telephones
- * Voltage controlled Crystal Oscillators

PARTMARKING DETAIL ZDC833A – C2A

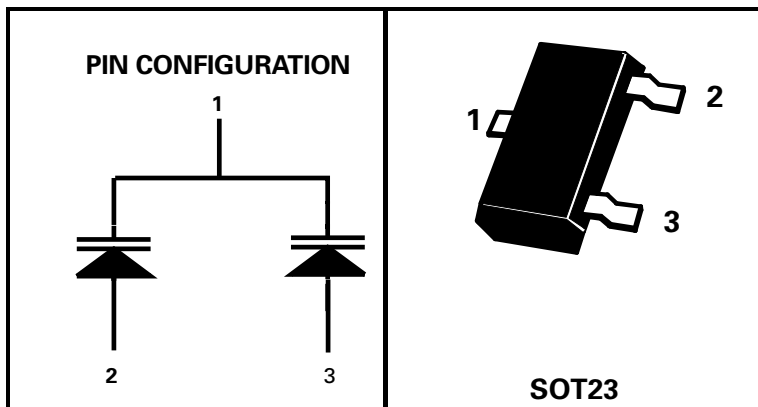

ABSOLUTE MAXIMUM RATINGS.(Each Diode)

PARAMETER	SYMBOL	VALUE	UNIT
Forward Current	I_F	200	mA
Power Dissipation at $T_{amb}=25^{\circ}C$	P_{tot}	330	mW
Operating and Storage Temperature Range	$T_j:T_{stg}$	-55 to +150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$). (Each Diode)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Reverse Breakdown Voltage	V_{BR}	25			V	$I_R = 10\mu A$
Reverse Leakage Current	I_R		0.2	10	nA	$V_R = 20V$
Temperature Coefficient	η			400	ppm/ $^{\circ}C$	$V_R = 3V, f=1MHz$
Diode Capacitance	C_d	29.7	33	36.3	pF	$V_R = 2V, f=1MHz$
Capacitance Ratio	C_d / C_d	5.0		6.5		$V_R = 2V/20V, f=1MHz$
Figure of Merit	Q	200				$V_R = 3V, f=50MHz$

ZDC833A

TYPICAL CHARACTERISTICS

