



**Distributor of On-Shore Technology, Inc.: Excellent Integrated System Limited**  
Datasheet of OSTYK51502330 - Connector Barrier Block Strip 2 Circuit 0.374" (9.50mm)

Contact us: [sales@integrated-circuit.com](mailto:sales@integrated-circuit.com) Website: [www.integrated-circuit.com](http://www.integrated-circuit.com)

---

## **Excellent Integrated System Limited**


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)  
[OSTYK51502330](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

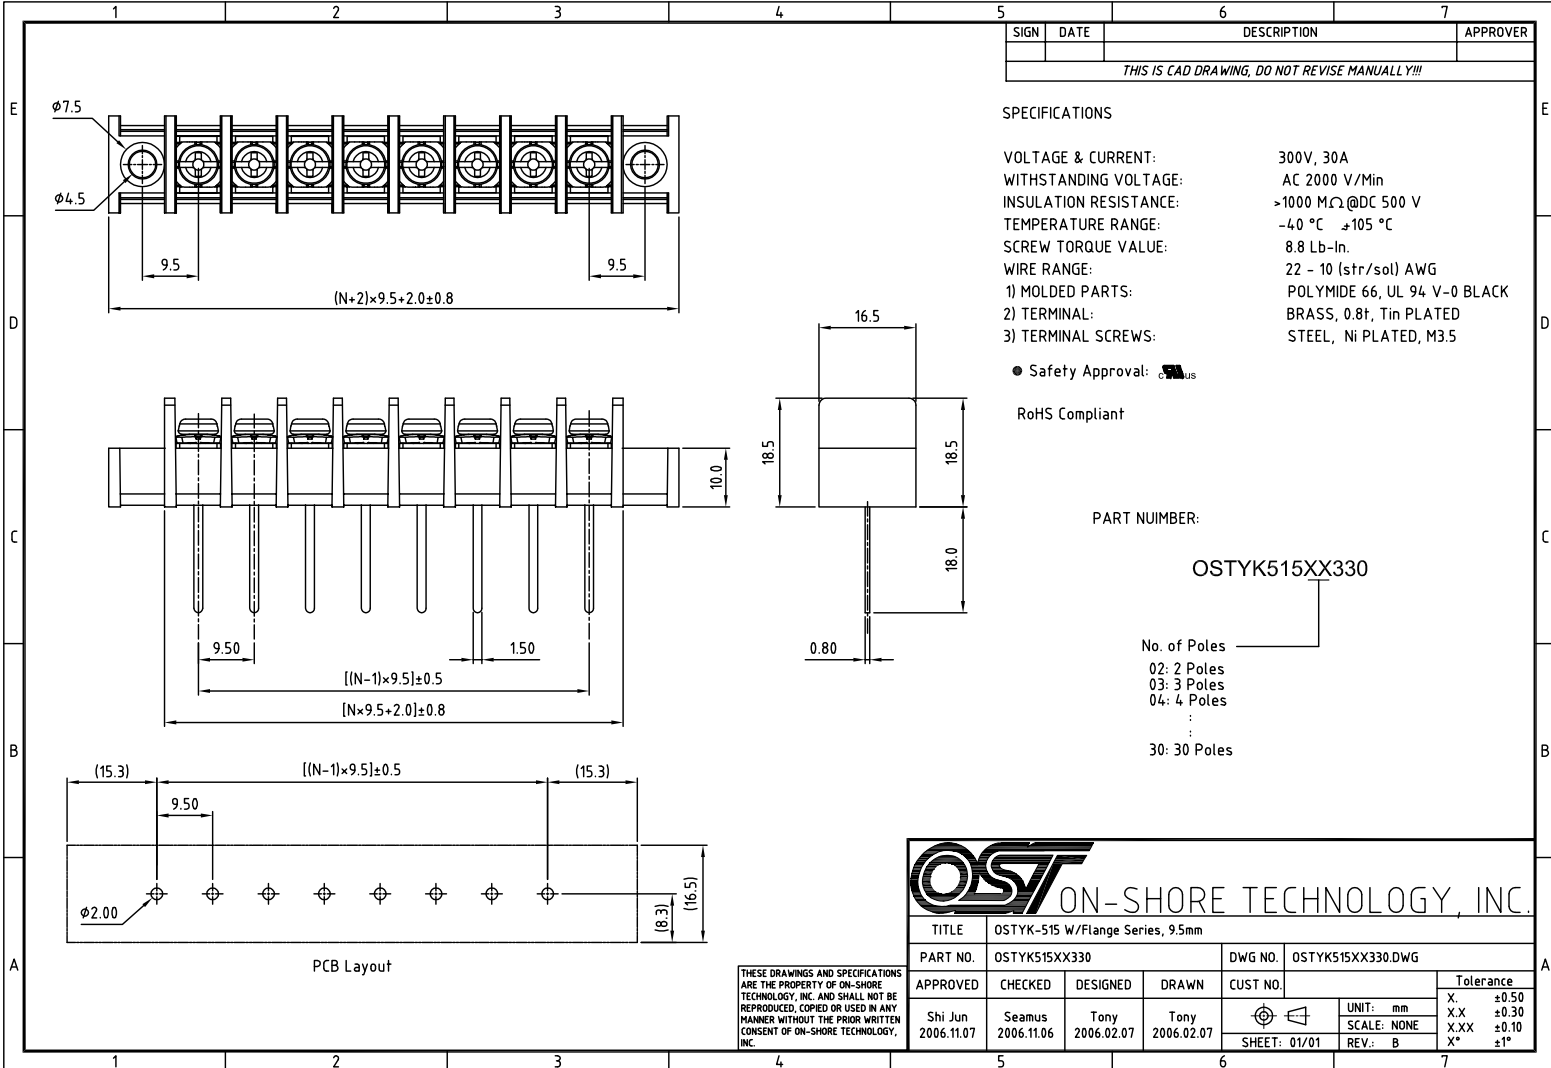

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

**SPECIFICATIONS**

VOLTAGE & CURRENT: 300V, 30A  
 WITHSTANDING VOLTAGE: AC 2000 V/Min  
 INSULATION RESISTANCE: >1000 MΩ@DC 500 V  
 TEMPERATURE RANGE: -40 °C ~ +105 °C  
 SCREW TORQUE VALUE: 8.8 Lb-in.  
 WIRE RANGE: 22 - 10 (str/sol) AWG  
 1) MOLDED PARTS: POLYIMIDE 66, UL 94 V-0 BLACK  
 2) TERMINAL: BRASS, 0.8t, Tin PLATED  
 3) TERMINAL SCREWS: STEEL, Ni PLATED, M3.5

● Safety Approval: US  
 RoHS Compliant

PART NUMBER: OSTYK515XX330

No. of Poles  
 02: 2 Poles  
 03: 3 Poles  
 04: 4 Poles  
 ...  
 30: 30 Poles

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

		TITLE		OSTYK-515 W/Flange Series, 9.5mm	
		PART NO.		OSTYK515XX330	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.
Shi Jun 2006.11.07		Seamus 2006.11.06	Tony 2006.02.07	Tony 2006.02.07	
		UNIT: mm		Tolerance	
		SCALE: NONE		X ±0.50	
		SHEET: 01/01		REV.: B	
				X.X ±0.30	
				X.XX ±0.10	
				X* ±1°	