

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Vishay Foil Resistors \(Division of Vishay Precision Group\)](#)
[Y1747V0008QT9W \(10K/10K\)](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

**Ultra High Precision Z-Foil Surface Mount 4 Resistor Network
Dual-In-Line Package with TCR Tracking of 0.1 ppm/°C, PCR Tracking of
5 ppm at Rated Power, and Tolerance Match of 0.01 %**

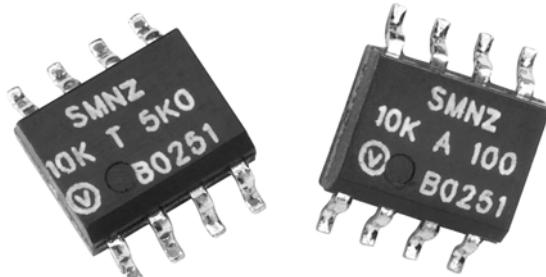

Any value and any ratio available within resistance range

INTRODUCTION

The Z-Foil technology provides a significant reduction of the resistive components' sensitivity to ambient temperature variations (TCR) and applied power changes (PCR). 0.05 ppm/°C Absolute TCR removes errors due to temperature gradients.

Model SMNZ offers extremely low TCR (absolute and tracking), excellent load life stability, tight tolerance (absolute and matching), excellent ratio stability, low current noise, low voltage coefficient and non sensitivity to ESD - **all in the same resistor**.


The SMNZ surface mount network is made up of 4 independent Bulk Metal® Z-Foil resistors in a small standard molded epoxy package with 50 MIL lead pitch (JEDEC MS-012 package).

The electrical specification of this integrated construction offers improved performance and better real estate utilization over discrete resistors and matched sets. The resistor may be used independently or as divider pairs.

Our application engineering department is available to advise and make recommendations. For non-standard technical requirements and special applications, please contact us.

APPLICATIONS

- Instrumentation amplifiers
- Bridge networks
- Differential amplifiers
- Ratio arms in bridge circuits
- Medical and test equipment
- Military
- Airborne etc




FEATURES

- Temperature coefficient of resistance (TCR): absolute: $\pm 0.05 \text{ ppm/}^{\circ}\text{C}$ typical (0°C to $+60^{\circ}\text{C}$)
 $\pm 0.2 \text{ ppm/}^{\circ}\text{C}$ typical (-55°C to $+125^{\circ}\text{C}$, $+25^{\circ}\text{C}$ Ref.) (see table 1)
 Tracking: $0.1 \text{ ppm/}^{\circ}\text{C}$ typical (see table 1)
- Tolerance match: 0.01%
- Power coefficient tracking - "R2 -R1 due to self heating": 5 ppm at rated power
- Power rating: at 70°C
 Entire package: 0.4 W
 Each resistor: 0.1 W
- Ratio stability: 0.005% (0.1 W at 70°C , 2000 h)
- Large variety of resistance ratios
- Electrostatic discharge (ESD) above $25\,000 \text{ V}$
- Short time overload $\leq 0.0025 \%$
- Non-inductive, non-capacitive design
- Rise time: 1 ns without ringing
- Current noise: $< -40 \text{ dB}$
- Voltage coefficient $< 0.1 \text{ ppm/V}$
- Non-inductive: $< 0.08 \mu\text{H}$
- Non hot spot design
- Terminal Finishes available: lead (Pb)-free tin/lead alloy
- For better performances please contact us
- Any value available within resistance range (e.g. 1K2345)
- Prototype samples available from 48 h. For more information, please contact foil@vpgsensors.com




RoHS*
COMPLIANT

FIGURE 1 - SCHEMATICS

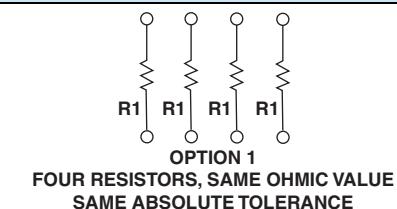

FOUR RESISTORS, SAME OHMIC VALUE
SAME ABSOLUTE TOLERANCE



TWO RESISTOR PAIRS
 $R1/R2$; $R2/R1$

Note

1. Different schematics are available (R1, R2, R3, R4)

TABLE 1 - MODEL SMNZ SPECIFICATIONS

| MODEL | RESISTANCE VALUES ¹⁾ | ABSOLUTE TCR (- 55 °C TO + 125 °C, + 25 °C REF.) (TYPICAL + MAX. SPREAD) | RESISTANCE RATIO | TCR TRACKING | | TOLERANCE | |
|-------|---------------------------------|--|---|--|---------------------------------|----------------------------|--|
| | | | | MAX. | ABSOLUTE | MATCH | |
| SMNZ | 100 Ω to 1 kΩ 1 kΩ to 10 kΩ | ± 0.2 ± 2.8 ± 0.2 ± 1.8 | R1/R2 = 1 1 < R1/R2 ≤ 10 10 < R1/R2 ≤ 100 | 0.5 ppm/°C 1.0 ppm/°C 2.0 ppm/°C | ± 0.02 % ± 0.05 % ± 0.1 % | 0.01 % 0.02 % 0.05 % | |

Note

1. SMN (Classic Foil) available with values up to 20 kΩ

* Pb containing terminations are not RoHS compliant, exemptions may apply

SMNZ (Z-Foil)

FIGURE 2 - POWER DERATING CURVE

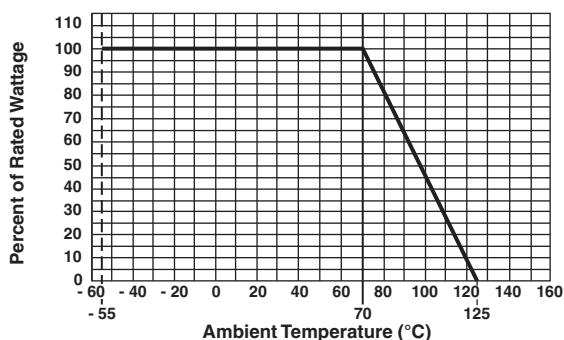


FIGURE 4 - TYPICAL TCR CURVE Z-FOIL


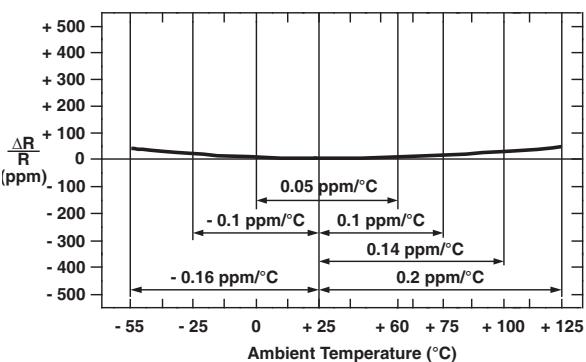


FIGURE 3 - DIMENSIONS AND IMPRINTING EXAMPLE in inches (millimeters)

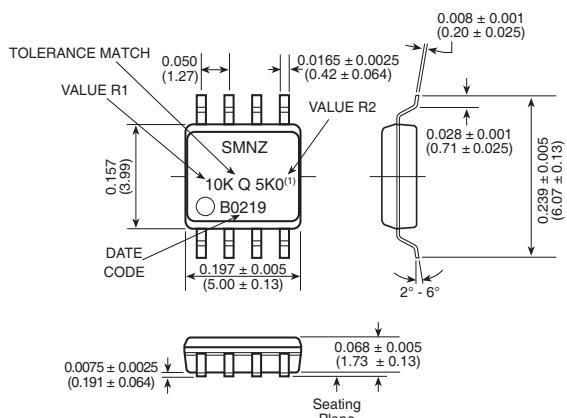

Note

⁽¹⁾ If the resistance value of R1 and R2 contains more than 6 characters together, the VCODE will be printed instead (see Resistance Value Code List for Popular Ratios Table) followed by the ratio tolerance code.

FIGURE 5 - TRIMMING TO VALUES
(conceptual illustration)

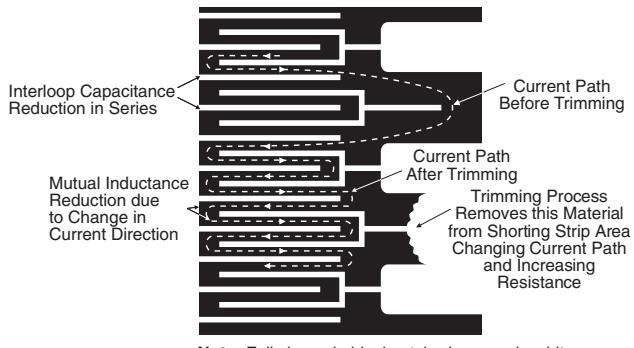


FIGURE 6 - LAND PATTERN in inches (millimeters)

| | Z | G | X | Y | C | D | E | |
|----------------|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|-----------------|--|
| MINIMUM | 0.283 (7.19) | 0.102 (2.59) | 0.024 (0.61) | 0.095 (2.41) | 0.197 (5.00) | 0.150 (3.81) | 0.050 (1.27) | |
| MAXIMUM | 0.291 (7.39) | 0.110 (2.79) | 0.032 (0.81) | REFERENCE | | | | |


TABLE 2 - PERFORMANCE SPECIFICATIONS (per MIL-PRF 914 test methods)

| SPECIFICATIONS | TYPICAL LIMITS |
|---|--|
| Power Rating at + 70 °C | Each resistor: 0.1 W Entire package: 0.4 W |
| Maximum Working Voltage (each resistor) | $(P \times R)^{1/2}$ |
| Thermal Shock 25 x (- 65 °C to + 125 °C) | $\Delta R = 0.01\% \text{ (100 ppm)}$ $\Delta \text{Ratio} = 0.01\% \text{ (100 ppm)}$ |
| Thermal Shock 5 x (- 65 °C to + 125 °C) and Power Conditioning 1.5 rated power at 25 °C, 100 h | $\Delta R = 0.02\% \text{ (200 ppm)}$ $\Delta \text{Ratio} = 0.015\% \text{ (150 ppm)}$ |
| DWV Atm. Pressure 200 V (A.C), 1 min | Successfully passed |
| Insulation Resistance 100 V (D.C), 1 min | $> 10^4 \text{ M}\Omega$ |
| Resistance to Soldering Heat | $\Delta R = 0.01\% \text{ (100 ppm)}$ $\Delta \text{Ratio} = 0.005\% \text{ (50 ppm)}$ |
| Moisture Resistance + 65 °C to - 10 °C; 90 % to 98 % RH; 0.1 x rated power; 240 h | $\Delta R = 0.02\% \text{ (200 ppm)}$ $\Delta \text{Ratio} = 0.005\% \text{ (50 ppm)}$ |
| Shock (Specified Pulse) 100G | $\Delta R = 0.01\% \text{ (100 ppm)}$ $\Delta \text{Ratio} = 0.01\% \text{ (100 ppm)}$ |
| Vibration, High Frequency (10 Hz to 2000 Hz), 20G | $\Delta R = 0.005\% \text{ (50 ppm)}$ $\Delta \text{Ratio} = 0.005\% \text{ (50 ppm)}$ |
| High Temperature Exposure 100 h at 125 °C | $\Delta R = 0.01\% \text{ (100 ppm)}$ $\Delta \text{Ratio} = 0.005\% \text{ (50 ppm)}$ |
| Low Temperature Storage 24 h at - 65 °C | $\Delta R = 0.005\% \text{ (50 ppm)}$ $\Delta \text{Ratio} = 0.005\% \text{ (50 ppm)}$ |
| Load Life Stability at 70 °C; 0.1 W per resistor, 2000 h | $\Delta R = 0.005\% \text{ (50 ppm)}$ $\Delta \text{Ratio} = 0.005\% \text{ (50 ppm)}$ |
| Short Time Overload 6.25 x rated power; 5 s | $\Delta R = 0.005\% \text{ (50 ppm)}$ $\Delta \text{Ratio} = 0.0025\% \text{ (25 ppm)}$ |
| Weight | 0.08 g |

SMNZ (Z-Foil)

TABLE 3 - GLOBAL PART NUMBER INFORMATION

NEW GLOBAL PART NUMBER: Y1747V0204BA9W (preferred part number format)

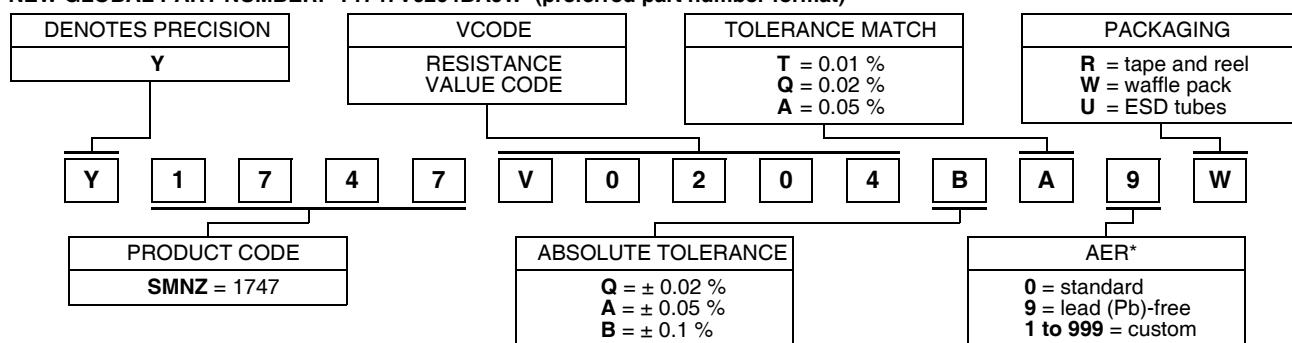

FOR EXAMPLE: ABOVE GLOBAL ORDER Y1747 V0204 B A 9 W:

TYPE: SMNZ

VALUES: 10K/500R

ABSOLUTE TOLERANCE: ± 0.1 %

TOLERANCE MATCH: 0.05 %

TERMINATION: Lead (Pb)-free

PACKAGING: Waffle Pack

HISTORICAL PART NUMBER: SMNZ 10K/500R TCR0.2 B A S W (will continue to be used)

| SMNZ | 10K/500R | TCR0.2 | B | A | S | W |
|-------|--|--------------|---|--|------------------------------------|---|
| MODEL | RESISTANCE VALUE | ABSOLUTE TCR | ABSOLUTE TOLERANCE | TOLERANCE MATCH | TERMINATION | PACKAGING |
| SMNZ | R ₁ = 10 kΩ R ₂ = 500 Ω | TCR0.2 | Q = ± 0.02 % A = ± 0.05 % B = ± 0.1 % | T = 0.01 % Q = 0.02 % A = 0.05 % | S = lead (Pb)-free B = tin/lead | T = tape and reel W = waffle pack U = ESD tubes |

Note

* For non-standard requests, please contact Application Engineering.

TABLE 4 - RESISTANCE VALUE CODE LIST FOR POPULAR RATIOS

(other values available upon request)

| VCODES | R1/R2 RATIO | R1 | R2 | VCODES | R1/R2 RATIO | R1 | R2 |
|--------|-------------|------|------|--------|-------------|------|------|
| V0201 | 100 | 10K | 100R | V0189 | | 1K | 400R |
| V0202 | 50 | 10K | 200R | V0185 | | 500R | 200R |
| V0197 | | 5K | 100R | V0207 | | 10K | 5K |
| V0203 | 25 | 10K | 400R | V0175 | | 2K | 1K |
| V0198 | | 5K | 200R | V0190 | | 1K | 500R |
| V0204 | 20 | 10K | 500R | V0182 | | 400R | 200R |
| V0193 | | 2K | 100R | V0179 | | 200R | 100R |
| V0205 | | 10K | 1K | V0186 | 1.25 | 500R | 400R |
| V0194 | 10 | 2K | 200R | V0178 | | 100R | 100R |
| V0187 | | 1K | 100R | V0180 | | 200R | 200R |
| V0200 | | 5K | 1K | V0183 | | 400R | 400R |
| V0195 | | 2K | 400R | V0023 | | 500R | 500R |
| V0188 | | 1K | 200R | V0191 | | 1K | 1K |
| V0184 | | 500R | 100R | V0176 | | 2K | 2K |
| V0196 | 4 | 2K | 500R | V0019 | | 5K | 5K |
| V0181 | | 400R | 100R | V0008 | | 10K | 10K |



Legal Disclaimer Notice

Vishay Precision Group, Inc.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.