

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Ametherm](#)
[SL08 12101](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




File: E209153



ISO9001:2008 Certified

Mechanical Specifications (mm)

D:	8.0	± .5
T:	4.0	± .5
Lead Diameter	0.5	± .1
S:	5.0	± 2.0
L:	38.0	± 3.0
Coating Lead Run Down (straight Leads)	5.0	± 1
B:	5.50	± .50
C:	1.50	± .2

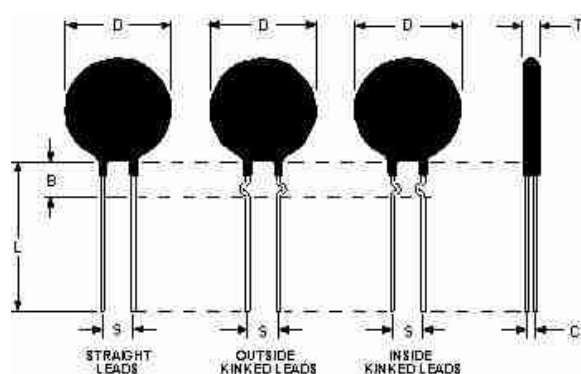

Electrical Specifications

Resistance:	120. (Ω	± 20 %
Max Steady State Current upto 65°C:	1.00	A
Max Rec. Energy Rating:	10	J
Actual Failure Instantaneous Energy:	20	J
Resistance @ 100% Max Current:	0.80	Ω
Resistance @ 50% Max Current:	1.80	Ω
Body Temperature at 100% Max Current:	95.00	°C
Dissipation Constant:	9.0	mw/°C
Thermal Time Constant:	20	Sec.
Material Type (for Beta and Curve):	I	

SL08 12101

Date: 03/16/2011	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A