

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Sullins Connector Solutions](#)
[QPC02SXHN-M290RC](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REVISIONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
A	2146	INITIAL RELEASE	07/16/2010	LH

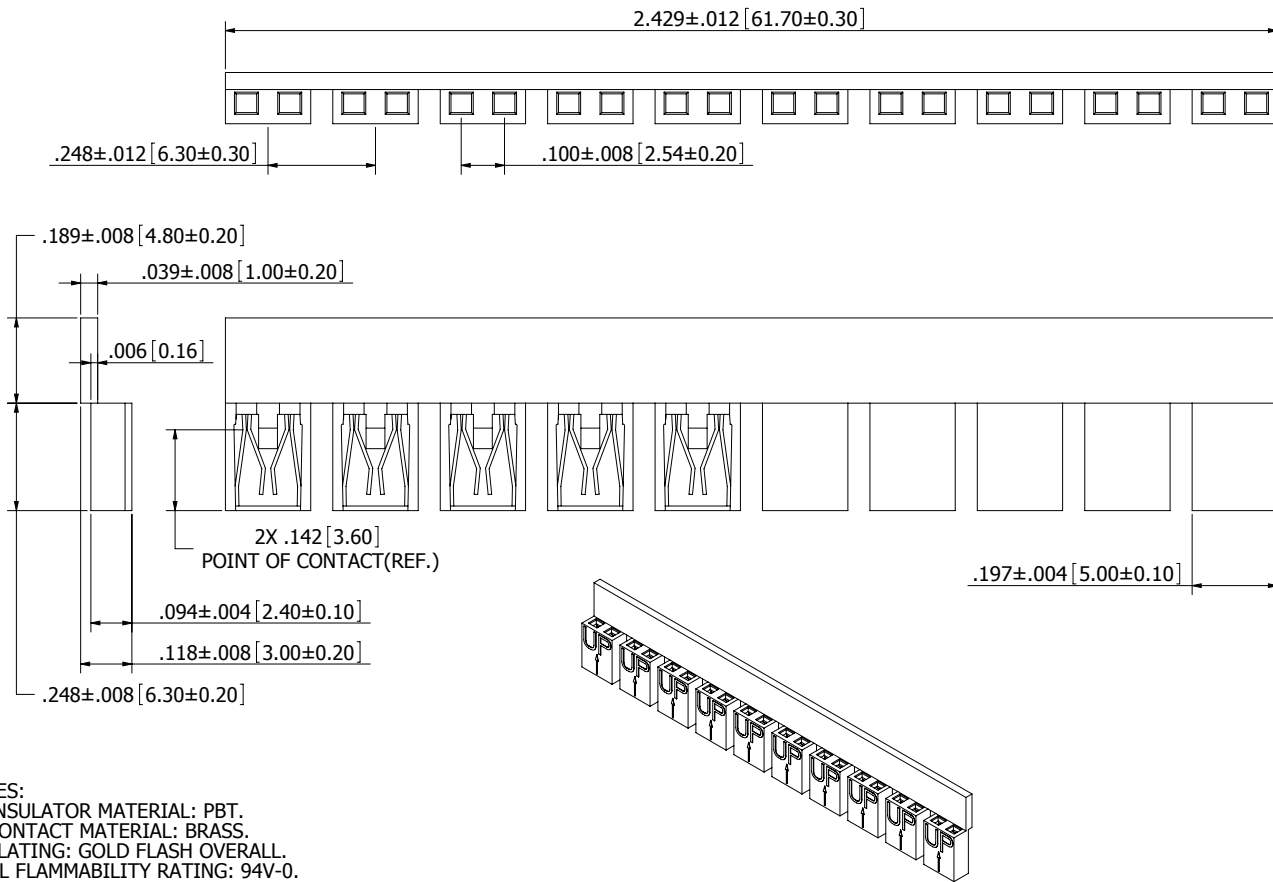

NOTES:

1. INSULATOR MATERIAL: PBT.
2. CONTACT MATERIAL: BRASS.
3. PLATING: GOLD FLASH OVERALL.
4. UL FLAMMABILITY RATING: 94V-0.
5. DIELECTRIC WITHSTANDING VOLTAGE: 650V AC.
6. CURRENT RATING: 3 AMPS PER CONTACT.
7. CONTACT RESISTANCE: 30 MILLI OHMS MAX.
8. INSULATION RESISTANCE: 1000 MEGA OHMS.
9. DOUBLE TUNING FORK TYPE CONTACT, ACCOMMODATES .025" [0.64mm] SQ PINS.
10. .100" [2.54mm] PITCH LOW-PROFILE MINI TYPE.
11. OPERATING TEMPERATURE: -40° TO +85°C
12. MODIFICATION: CONTINUITY TYPE.



RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES (MM)
TOLERANCES:
ANGULAR: ± 30°
XXX+ ± .012 [.30]
XXX+ ± .008 [.20]
XXX+ ± .004 [.10]

INTERPRET DIMENSIONS AND GEOMETRIC
TOLERANCING
PER: ASME Y14.5M-2009

DATE	NAME
07/16/2010	LH

THIS INFORMATION IS THE PROPERTY OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.

SULLINS CONNECTOR SOLUTIONS	
DESCRIPTION:	MINI SHUNT, .100" CC, OPEN TOP
PART NUMBER	QPC02SXHN-M290RC
SIZE	DWG. NO. 11511
SCALE: 1:1	REV A
SHEET 1 OF 1	