

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Tensility International Corporation 10-00432

For any questions, you can email us directly: sales@integrated-circuit.com



Distributor of Tensility International Corporation: Excellent Integrated System Limited

Datasheet of 10-00432 - CBL ASSY MINI DIN FEMALE 6' 9POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

TENSILITY

part number: 10-00432

description: Cable, 1830 mm, 9P mini-DIN female

50-00169, to stripped tinned, 26 AWG,

UL2464 30-00058, shielded

date: March 10, 2011 rev: A

rev: A page: 1 of 2


Specifications:

connector description (1)	9P mini DIN female, molding style, brass, nickel plating, P/N 50-00169
overmold (2)	inner: PE; outer: 60P, PVC, black
wire description (3)	9C, 26 AWG, UL2464, 300 V, 80C, 6.3 mm, shielded, VW-1, PVC, 60P, P/N 30-00058
cable outer diameter	Ø6.3 mm
cable color	black
cable length	1830 ± 50 mm
twist tie (4)	black
shrink tube (5)	Ø7.0, 105°C, 10 ± 2 mm, black
shrink tube (6)	Ø1.0, 105°C, 30 ± 5 mm, black
current rating	300 mA @ 12 Vdc

Notes:

Function test: no open, no reversed polarity, no short circuit, no INT RoHS compliant

Mechanical drawing:

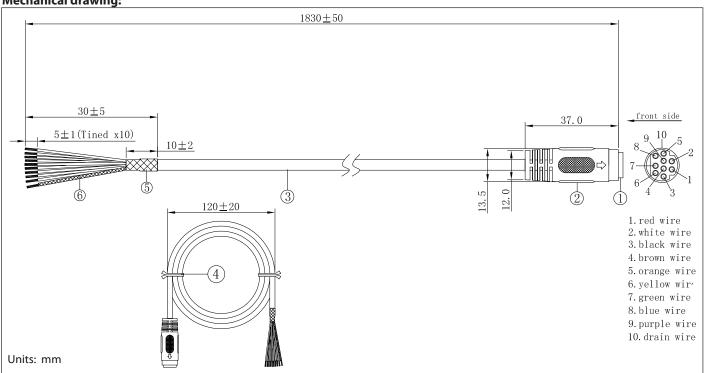

tolerance X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm applicable unless otherwise indicated in specification or on drawings Tensility International Corporation reserves the right to substitute parts which are functionally equivalent to the ones specified.

Initial Date



Distributor of Tensility International Corporation: Excellent Integrated System Limited

Datasheet of 10-00432 - CBL ASSY MINI DIN FEMALE 6' 9POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

part number: 10-00432

description: Cable, 1830 mm, 9P mini-DIN female

50-00169, to stripped tinned, 26 AWG,

UL2464 30-00058, shielded

date: March 10, 2011 rev: page: 2 of 2

Rev			

Rev	Date	Description
Α	March 10, 2011	initial release

Specification Approval

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature	Title ————
Name	Date
Company	Branch