Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

<u>Tensility International Corporation</u> 10-00438

For any questions, you can email us directly: sales@integrated-circuit.com



Distributor of Tensility International Corporation: Excellent Integrated System Limited

Datasheet of 10-00438 - CBL ASSY DIN MALE 6' SHLD 8POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

TENSILITY

part number: 10-00438 description: Cable, 183

Cable, 1830 mm, 8P DIN male 50-00175, to stripped tinned, 20 AWG, UL2464 30-00028,

rev: A page: 1 of 2

date: March 8, 2011

shielded


Specifications:

00
8P standard DIN male, molding style, brass, nickel plating, 270°, P/N 50-00175
inner: PE; outer: 60P, PVC, black
8C, 20 AWG, UL2464, 300 V, 80 C, 8.0 mm, shielded, VW-1, PVC, 60P, P/N 30-00028
Ø8.0 mm
black
1830 ± 50 mm
black
Ø8.0, 105°C, 10 ± 2 mm, black
Ø1.0, 105°C, 30 ± 5 mm, black
2 A @ 12 Vdc

Notes:

Function test: no open, no reversed polarity, no short circuit, no INT RoHS compliant

Mechanical drawing:

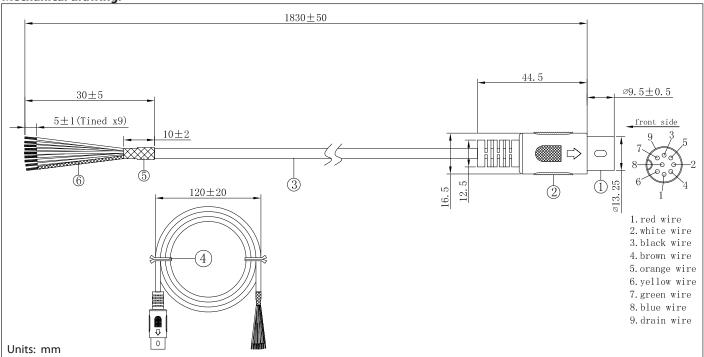

tolerance X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm applicable unless otherwise indicated in specification or on drawings Tensility International Corporation reserves the right to substitute parts which are functionally equivalent to the ones specified.

Initial Date



Company

Distributor of Tensility International Corporation: Excellent Integrated System Limited Datasheet of 10-00438 - CBL ASSY DIN MALE 6' SHLD 8POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

part number: description:

10-00438

Cable, 1830 mm, 8P DIN male 50-00175, to stripped tinned, 20 AWG, UL2464 30-00028,

rev: page: 2 of 2

date: March 8, 2011

ev	Date	Description
	March 8, 2011	initial release
	ation Approval	
Specifica		viewed the entire specification, tested a sample of the product, and confirm that it meets your
	-off verifies that you have re	
Spec sign- requireme	ents. This specification refle	cts the part as it will be ordered. Orders will not be processed until the specification pages have
Spec sign- requireme peen initia	ents. This specification refle aled and the approval page	cts the part as it will be ordered. Orders will not be processed until the specification pages hav has been signed. This specification is confidential and is not to be transmitted without prior
Spec sign- requireme been initia	ents. This specification refle	cts the part as it will be ordered. Orders will not be processed until the specification pages have

Branch -