Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

<u>Tensility International Corporation</u> 10-00539

For any questions, you can email us directly: sales@integrated-circuit.com



Distributor of Tensility International Corporation: Excellent Integrated System Limited

Datasheet of 10-00539 - CBL ASSY MINI DIN MALE R/A 3POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

TENSILITY

part number: 10-00539 description: Cable, 183

Cable, 1830 mm, 3P 90° mini-DIN male

50-00156, to stripped tinned, 26 AWG, UL2464 30-00060, shielded

rev: A page: 1 of 2

date: March 10, 2011


Specifications:

connector description (1)	3P mini DIN male, molding style, brass, nickel plating, P/N 50-00156
overmold (2)	inner: PE; outer: 60P, PVC, black
wire description (3)	3C, 26 AWG, UL2464, 300 V, 80 C, 4.35 mm, shielded, VW-1, PVC, 60P, P/N 30-00060
cable outer diameter	Ø4.35 mm
cable color	black
cable length	1830 ± 50 mm
twist tie (4)	black
shrink tube (5)	Ø5.0, 105°C, 10 ± 2 mm, black
shrink tube (6)	Ø1.0, 105°C, 30 ± 5 mm, black
current rating	300 mA @ 12 Vdc

Notes:

Function test: no open, no reversed polarity, no short circuit, no INT RoHS compliant

Mechanical drawing:

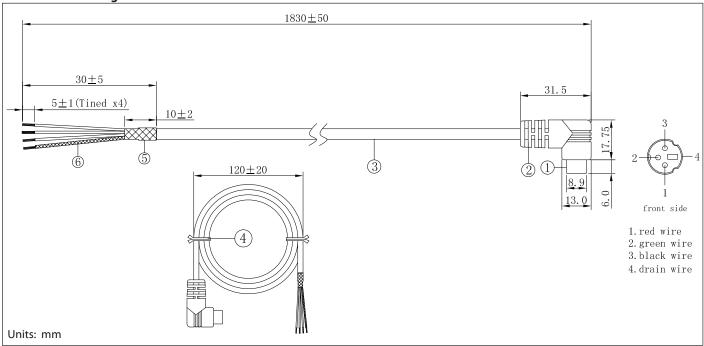

tolerance X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm applicable unless otherwise indicated in specification or on drawings Tensility International Corporation reserves the right to substitute parts which are functionally equivalent to the ones specified.

Initial Date



Distributor of Tensility International Corporation: Excellent Integrated System Limited

Datasheet of 10-00539 - CBL ASSY MINI DIN MALE R/A 3POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

part number: 10-00539 description:

Cable, 1830 mm, 3P 90° mini-DIN male

50-00156, to stripped tinned, 26 AWG,

UL2464 30-00060, shielded

date: March 10, 2011

rev: page: 2 of 2

lev	Date	Description
	March 10, 2011	initial release
a :c		
	ation Approval	:
requireme	-on verines that you have rev ents. This specification reflect	iewed the entire specification, tested a sample of the product, and confirm that it meets your ts the part as it will be ordered. Orders will not be processed until the specification pages have
been initia	aled and the approval page h	as been signed. This specification is confidential and is not to be transmitted without prior
	from Tensility.	
Cianat	•	Tielo
signature	e	Title
Name		Date
· varrie		