

# **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Tensility International Corporation 10-00541

For any questions, you can email us directly: <u>sales@integrated-circuit.com</u>



## **Distributor of Tensility International Corporation: Excellent Integrated System Limited** Datasheet of 10-00541 - CBL ASSY MINI DIN MALE R/A 5POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

 part number:
description:


10-00541 Cable, 1830 mm, 5P 90° mini-DIN male 50-00158, to stripped tinned, 26 AWG, UL2464 30-00062, shielded date: March 10, 2011 rev: A page: 1 of 2

Specifications:				
connector description (1)	5P mini DIN male, molding style, brass, nickel plating, P/N 50-00158			
overmold (2)	inner: PE; outer: 60P, PVC, black			
wire description (3)	5C, 26 AWG, UL2464, 300V, 80C, 5.10 mm, shielded, VW-1, PVC, 60P, P/N 30-00062			
cable outer diameter	Ø5.1 mm			
cable color	black			
cable length	1830 ± 50 mm			
twist tie (4)	black			
shrink tube (5)	Ø6.0, 105°C, 10 ± 2 mm, black			
shrink tube (6)	Ø1.0, 105°C, 30 ± 5 mm, black			
current rating	300 mA @ 12 Vdc			

#### Notes:

Function test: no open, no reversed polarity, no short circuit, no INT RoHS compliant

#### Mechanical drawing:

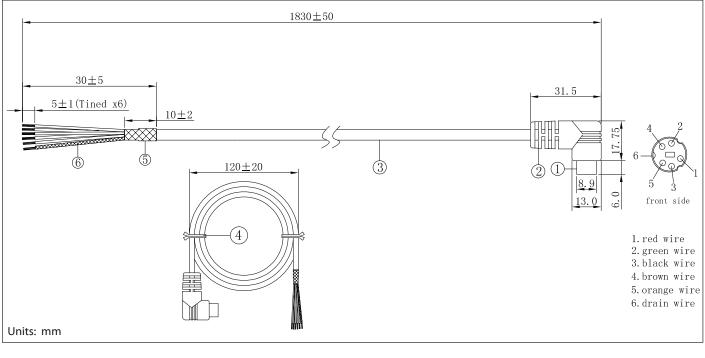

tolerance X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm applicable unless otherwise indicated in specification or on drawings		
Tensility International Corporation reserves the right to substitute parts which are functionally equivalent to the ones specified.	Initial	Date



## **Distributor of Tensility International Corporation: Excellent Integrated System Limited** Datasheet of 10-00541 - CBL ASSY MINI DIN MALE R/A 5POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com



part number: description:

10-00541 Cable, 1830 mm, 5P 90° mini-DIN male 50-00158, to stripped tinned, 26 AWG, UL2464 30-00062, shielded date: March 10, 2011 rev: A page: 2 of 2

Rev	Date	Description	
А	March 10, 2011	initial release	

### **Specification Approval**

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature	Title
Name	Date
Company	Branch