

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Tensility International Corporation 10-00542

For any questions, you can email us directly: <u>sales@integrated-circuit.com</u>



Distributor of Tensility International Corporation: Excellent Integrated System Limited Datasheet of 10-00542 - CBL ASSY MINI DIN MALE R/A 6POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

part number:	
description:	


10-00542 Cable, 1830 mm, 6P 90° mini-DIN male 50-00159, to stripped tinned, 26 AWG, UL2464 30-00063, shielded date: March 10, 2011 rev: A page: 1 of 2

Specifications:			
connector description (1)	6P mini DIN male, molding style, brass, nickel plating, P/N 50-00159		
overmold (2)	inner: PE; outer: 60P, PVC, black		
wire description (3)	6C, 26 AWG, UL2464, 300V, 80C, 5.55 mm, shielded, VW-1, PVC, 60P, P/N 30-00063		
cable outer diameter	Ø5.55 mm		
cable color	black		
cable length	1830 ± 50 mm		
twist tie (4)	black		
shrink tube (5)	Ø6.0, 105°C, 10 ± 2 mm, black		
shrink tube (6)	Ø1.0, 105°C, 30 ± 5 mm, black		
current rating	300 mA @ 12 Vdc		

Notes:

Function test: no open, no reversed polarity, no short circuit, no INT RoHS compliant

Mechanical drawing:

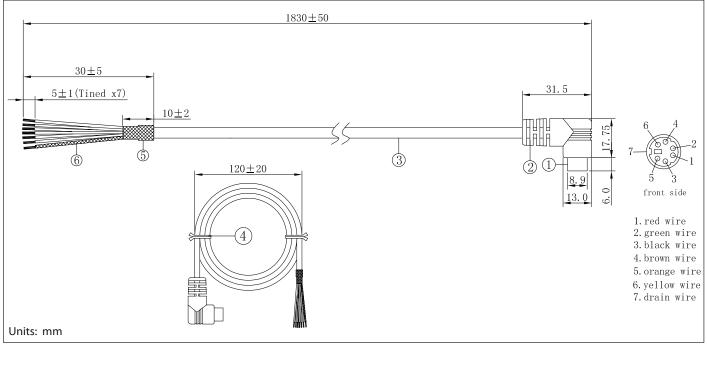

tolerance X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm applicable unless otherwise indicated in specification or on drawings			
Tensility International Corporation reserves the right to substitute parts which are functionally equivalent to the ones specified.	Initial	Date	



Distributor of Tensility International Corporation: Excellent Integrated System Limited Datasheet of 10-00542 - CBL ASSY MINI DIN MALE R/A 6POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com



part number: description:

10-00542 Cable, 1830 mm, 6P 90° mini-DIN male 50-00159, to stripped tinned, 26 AWG, UL2464 30-00063, shielded date: March 10, 2011 rev: A page: 2 of 2

Rev	Date	Description	
A	March 10, 2011	initial release	

Specification Approval

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature	Title
Name	Date
Company	Branch