

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Delta Electronics](#)
[AMD-24V080W3CA](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Switch Mode Power Supply

Medical Adapter

AMD-24V080WxyA

MODEL: AMD-24V080WxyA



Features:

- 80Watts Output Power.
- 100-240Vac Universal Input.
- AC Receptacle with C14 (IEC320AC receptacle)
- Efficiency > 87%
- No load power consumption < 0.5W
- Energy star Compliant (Level V)
- Low leakage current
- Brownout & Brownout Recovery
- Medical safety standard compliant UL60601-1/EN60601-1/CSA60601-1
- MTBF: > 600,000 Hrs.



Summary

The AMD-24V080WxyA is the Medical Adapter from one of the world's largest power supply manufacturers -Delta.

The product offers a regulated output voltage of 24V, along with wide temperature range from 0°C to +40°C and a minimum holdup time of 15ms.

The state-of-the-art design is made to withstand medical equipment requirements. The rugged, ultra-compact plastic case with shock and vibration resistant.

The 80 watts Medical power supply provides overvoltage, overload and over temperature protection.

Due to the wide input voltage range from 90 to 264Vac (Nominal input: 100Vac to 240 Vac), the Delta's medical power supply is worldwide usable.

The Input Socket & output connector are made for easy installation.



Switch Mode Power Supply

Medical Adapter

AMD-24V080WxyA

Technical Data

80W Medical Adapter	
Input Data (1)	
Nominal input voltage (wide-range input)	100V-240vac
Input Voltage range	90V-264vac
Frequency	47-63 Hz
Max Input Current	0.9A max @ 115 Vac, 0.45A max @ 230 Vac.
Inrush current limitation. I^2t (+25 °C) typ.	40A @ 115vac & 80A @ 230Vac
Efficiency (at 115VAC and nominal values)	>87%
No load power consumption	>0.5W
Mains buffering at nominal load (typ.)	15 msec min @ 115 Vac
Turn-on time after applying the mains voltage	3Sec
Transient surge voltage protection	VARISTOR
Input fuse, internal (device protection)	T 3.15 AH / 250V
Discharge current to PE	< 0.25mA
Connection Method	Pluggable

Output Data (2)	
Nominal output voltage U_N / tolerance	24V $\pm$ 2%
Setting range of the output voltage	23.5V-24.5V
Nominal output current I_N with convection cooling:-20 to +50°C	3.3A
Max. power dissipation idling/nominal load approx.	80W
Ripple/ Noise (20 MHz)	<240mVpp @ +25 °C
Line Regulation	+ 0.5%
Load Regulation :	Exclude output cord : $\pm$ 1% Include output cord + 5%
Protection :	Over current (Auto Recovery) Over Voltage (Auto Recovery) Over Temp (Latch)

Certification/Standards	
Electrical safety (of information technology equipment)	UR/cUR As per STD UL60601-1/CSA60601-1, CB scheme to EN/IEC60601-1, DEMKO EN60601-1 CE Mark LVD and EMC
RoHS Compliant	Yes



Switch Mode Power Supply

Medical Adapter

AMD-24V080WxyA

General Data	
MTBF	> 600,000 Hrs
Type of housing	Plastic Enclosed
Dimensions (W / H / D) + mounting rail	70W * 50H * 150L mm
Weight	0.55kg.
Climatic Data	
Ambient temperature (Operating)	0 °C to 40 °C
Ambient temperature (Storage)	-35 °C to + 85 °C
Humidity	5% to 95% non-condensing
In conformance with EMC guideline 89/336/EEC and low voltage directive 73/23/EEC	FCC (Title 47 Part 15 Class B), EN55022 (CISPR 22 Class B)
EMC (electromagnetic compatibility)	
Immunity to interference according to EN 61000-6-1	
EN 61000-4-2²⁾ Discharge of static electricity (ESD)	Housing Contact discharge: 8 kV Air Discharge : 15 kV
EN 61000-4-3¹⁾ Electromagnetic HF field	Housing Frequency/Field intensity: 80Hz – 1GHz / 10V/M, with 1kHz tone/80% modulation
EN 61000-4-4²⁾ Fast transients (Burst):	Input L,N,PE : 2kV ³⁾ Signal: -
EN 61000-4-5²⁾ Surge voltage capacities (Surge):	Input : Level 3 Common Mode : 2kV ³⁾ Differential Mode : 1kV ⁴⁾
EN 61000-4-6¹⁾ Conducted disturbance	I/O: Level 3 Frequency / U _o : 0.15MHz - 80MHz / 10Vrms.
EN 61000-4-11²⁾ Voltage dips	Self recoverable, No damage
Noise emission according to EN 61000-6-3	
- Emitted radio interface - Radio interference voltage	EN55011 (EN55022) CLASS B ⁵⁾ EN55011 (EN55022) CLASS B ⁵⁾
EN55011 corresponds to CISPR11 / EN55022 corresponds to CISPR22 / EM 61000 corresponds to IEC 1000 1) Criterion A: Normal operating behavior within the defined limits. 2) Criterion B: Temporary impairment to operational behavior that is corrected by the device itself. 3) Symmetrical: Conductor to conductor. 4) Asymmetrical: Conductor to ground. 5) Class B: Area of application industry and residential	



Switch Mode Power Supply

Medical Adapter

AMD-24V080WxyA

Numbering for Medical Adapter

For example: **AMD-24V080WxyA**

XX X XXXX XXXX X XX

XX.....Product Type

AM	Medical Adapter
----	-----------------

XX **X** XXXX XXXX X XX

X.....Model

D	Desktop
---	---------

XX X **XXXX** XXXX X XX

XXXX.....Voltage

24V	24 Voltage
-----	------------

XX X XXXX **XXXX** X XX

XXXX.....Watt

030W	30 Watt
060W	60 Watt
080W	80 Watt

XX X XXXX XXXX **X** XX

X.....Input Configuration

2	2 PIN AC
3	3 PIN AC

XX X XXXX XXXX X **X** X

X.....Connector Type

A	Inner diameter 2,5 mm
B	Inner diameter 2,1 mm

***** Outer Diameter 5,5 mm.**

XX X XXXX XXXX XX **X**

X.....Variation

(Eg, Customer, material Etc.)

A	Delta Standard - product
---	--------------------------




Switch Mode Power Supply

Medical Adapter


AMD-24V080WxyA

Mechanical drawing

Input Configuration

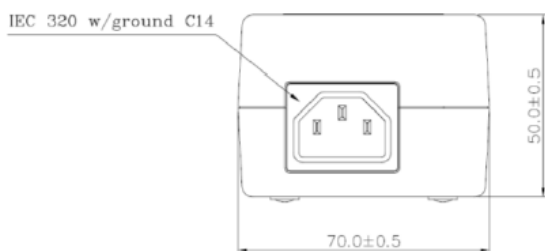

Output Connector

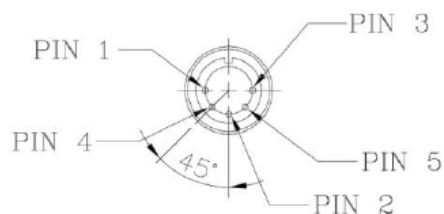

Pin#	Connection
1,2,4	GND
3,5	+V

Mechanical Specification

