

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Texas Instruments](#)  
[TPS51317RGBT](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



**TPS51317**

www.ti.com

SLUSAH9 –MARCH 2011

## 3.3-V/5-V Input, 6-A, D-CAP+™ Mode Synchronous Step-Down Integrated FETs Converter

Check for Samples: [TPS51317](#)

### FEATURES


- Integrated FETs Converter w/TI Proprietary D-CAP+™ Mode Architecture
- Minimum External Components Count
- Support all MLCC Output Capacitor and SP/POSCAP
- Auto-Skip Mode and Ripple Reduction Mode
- Optimized Efficiency at Light and Heavy Loads
- Selectable 800-kHz, 1-MHz, 1.2-MHz and 1.5-MHz Frequency
- Up to 6.0-V Conversion Voltage Range
- Adjustable Output Voltage Range From 0.6 V to 2 V
- Small 3.5 mm × 4 mm, 20-Pin QFN Package

### DESCRIPTION

The TPS51317 is a fully integrated synchronous buck regulator employing D-CAP+™ mode architecture. It is used for 3.3-V and 5-V step-down systems where space is a consideration, high-performance and optimized component count are required. The TPS51317 features four switching frequency settings (up to 1.5 MHz), synchronous operation in SKIP, droop support, external tracking support, pre-bias startup, output soft discharge, integrated bootstrap switch, power good function, enable function and complete protection functions, and both output ceramic and SP/POS capacitor support. It supports supply and conversion voltages up to 6.0 V, and output voltages adjustable from 0.6 V to 2.0V. The TPS51317 is available in the 3.5 mm × 4 mm 20-pin QFN package (Green RoHS compliant and Pb free) and is specified from -40°C to 85°C.

### APPLICATIONS

- Low-Voltage Applications Stepping Down from 5-V or 3.3-V Rail

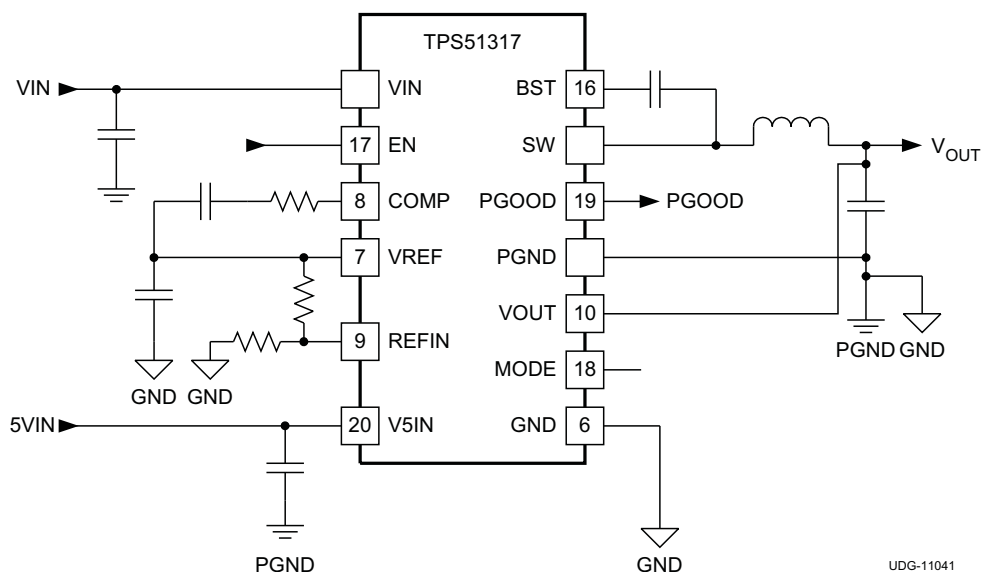

UDG-11041



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

D-CAP+ is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2011, Texas Instruments Incorporated

## TPS51317



SLUSAH9 – MARCH 2011

www.ti.com



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

**Table 1. ORDERING INFORMATION<sup>(1)</sup>**

T <sub>A</sub>	PACKAGE <sup>(2)</sup>	ORDERING NUMBER	PINS	OUTPUT SUPPLY	MINIMUM QUANTITY	ECO PLAN
-40°C to 85°C	Plastic QFN (RGB)	TPS51317RGBR	20	Tape and reel	3000	Green (RoHS and no Pb/Br)
		TPS51317RGBT	20	Mini reel	250	

- (1) For the most current package and ordering information, see the *Package Option Addendum* at the end of this document, or visit the TI website at [www.ti.com](http://www.ti.com).  
 (2) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).

## THERMAL INFORMATION

THERMAL METRIC <sup>(1)</sup>		TPS51317	UNITS
		RGB	
		20 PINS	
$\theta_{JA}$	Junction-to-ambient thermal resistance <sup>(2)</sup>	35.5	°C/W
$\theta_{JCTop}$	Junction-to-case (top) thermal resistance <sup>(3)</sup>	39.6	
$\theta_{JB}$	Junction-to-board thermal resistance <sup>(4)</sup>	12.4	
$\psi_{JT}$	Junction-to-top characterization parameter <sup>(5)</sup>	0.5	
$\psi_{JB}$	Junction-to-board characterization parameter <sup>(6)</sup>	12.5	
$\theta_{JCbott}$	Junction-to-case (bottom) thermal resistance <sup>(7)</sup>	3.7	

- (1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](http://SPRA953).  
 (2) The junction-to-ambient thermal resistance under natural convection is obtained in a simulation on a JEDEC-standard, high-K board, as specified in JESD51-7, in an environment described in JESD51-2a.  
 (3) The junction-to-case (top) thermal resistance is obtained by simulating a cold plate test on the package top. No specific JEDEC-standard test exists, but a close description can be found in the ANSI SEMI standard G30-88.  
 (4) The junction-to-board thermal resistance is obtained by simulating in an environment with a ring cold plate fixture to control the PCB temperature, as described in JESD51-8.  
 (5) The junction-to-top characterization parameter,  $\psi_{JT}$ , estimates the junction temperature of a device in a real system and is extracted from the simulation data for obtaining  $\theta_{JA}$ , using a procedure described in JESD51-2a (sections 6 and 7).  
 (6) The junction-to-board characterization parameter,  $\psi_{JB}$ , estimates the junction temperature of a device in a real system and is extracted from the simulation data for obtaining  $\theta_{JA}$ , using a procedure described in JESD51-2a (sections 6 and 7).  
 (7) The junction-to-case (bottom) thermal resistance is obtained by simulating a cold plate test on the exposed (power) pad. No specific JEDEC standard test exists, but a close description can be found in the ANSI SEMI standard G30-88.

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

		VALUE		UNIT
		MIN	MAX	
Input voltage range	VIN, V5IN, BST (with respect to SW)	−0.3	7.0	V
	BST	−0.3	14.0	
	SW	−2	7	
	EN	−0.3	7	
	MODE, REFIN	−0.3	3.6	
	VOUT	−1	3.6	
Output voltage range	COMP, VREF	−0.3	3.6	V
	PGOOD	−0.3	7.0	
	PGND	−0.3	0.3	
Junction temperature	T <sub>J</sub>	−40	150	
Storage temperature	T <sub>stg</sub>	−55	150	°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds			300	°C

(1) Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

## RECOMMENDED OPERATING CONDITIONS

		VALUE			UNIT
		MIN	TYP	MAX	
Input voltage range	VIN	−0.1		6.5	V
	V5IN	4.5		6.5	
	BST	−0.1		13.5	
	SW	−1.0		6.5	
	EN	−0.7		6.5	
	VOUT, MODE, REFIN	−0.1		3.5	
Output voltage range	COMP, VREF	−0.1		3.5	V
	PGOOD	−0.1		5.5	
	PGND	−0.1		0.1	
Operating temperature range, T <sub>A</sub>		−40		85	°C

## TPS51317



SLUSAH9 – MARCH 2011

www.ti.com

### ELECTRICAL CHARACTERISTICS

over recommended free-air temperature range,  $V_{VIN} = 5.0\text{ V}$ , PGND = GND (unless otherwise noted)

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNIT
SUPPLY: VOLTAGE, CURRENTS AND 5 V UVLO						
I <sub>VIND</sub>	VIN shutdown current	EN = 'LO'		0.02	5	μA
V <sub>5VIN</sub>	5VIN supply voltage	V5IN voltage range	4.5	5.0	6.5	V
I <sub>5VIN</sub>	5VIN supply current	EN = 'HI', V5IN supply current		1.1	2	mA
I <sub>5VIND</sub>	5VIN shutdown current	EN = 'LO', V5IN shutdown current		0.2	7.0	μA
V <sub>5VUVLO</sub>	V5IN UVLO	Ramp up; EN = 'HI'	4.20	4.37	4.50	V
V <sub>5VUHYS</sub>	V5IN UVLO hysteresis	Falling hysteresis		440		mV
V <sub>VREFUVLO</sub>	REF UVLO <sup>(1)</sup>	Rising edge of VREF, EN = 'HI'		1.8		V
V <sub>VREFUHYHS</sub>	REF UVLO hysteresis <sup>(1)</sup>			100		mV
V <sub>POR5VFILT</sub>	Reset	OVP latch is reset by V5IN falling below the reset threshold	1.5	2.3	3.1	V
VOLTAGE FEEDBACK LOOP: VREF, VOUT, AND VOLTAGE GM AMPLIFIER						
V <sub>OUTTOL</sub>	VOUT accuracy	V <sub>REFIN</sub> = 1 V, No droop	−1%	0%	1%	
V <sub>VREF</sub>	VREF	I <sub>VREF</sub> = 0 μA	1.98	2.00	2.02	V
		I <sub>VREF</sub> = 50 μA	1.975	2.000	2.025	
I <sub>REFSNK</sub>	VREF sink current	V <sub>VREF</sub> = 2.05 V		2.5		mA
G <sub>M</sub>	Transconductance			1.00		mS
V <sub>CM</sub>	Common mode input voltage range <sup>(1)</sup>		0		2	V
V <sub>DM</sub>	Differential mode input voltage		0		80	mV
I <sub>COMPSNK</sub>	COMP pin maximum sinking current	V <sub>COMP</sub> = 2 V, (V <sub>REFIN</sub> - V <sub>OUT</sub> ) = 80 mV		80		μA
I <sub>COMPSRC</sub>	COMP pin maximum sourcing current	V <sub>COMP</sub> = 2 V		−80		μA
V <sub>OFFSET</sub>	Input offset voltage	T <sub>A</sub> = 25°C		0		mV
R <sub>DSCH</sub>	Output voltage discharge resistance			42		Ω
f <sub>−3dBVL</sub>	−3dB Frequency <sup>(1)</sup>		4.5	6.0	7.5	MHz
CURRENT SENSE: CURRENT SENSE AMPLIFIER, OVERCURRENT AND ZERO CROSSING						
A <sub>CSINT</sub>	Internal current sense gain	Gain from the current of the low-side FET to PWM comparator when PWM = "OFF"	43	53	57	mV/A
I <sub>OCL</sub>	Positive overcurrent limit (valley)			7.6		A
I <sub>OCL(neg)</sub>	Negative overcurrent limit (valley)			−9.3		A
V <sub>ZXOFF</sub>	Zero crossing comp internal offset			0		mV
DRIVERS: BOOT STRAP SWITCH						
R <sub>DSONBST</sub>	Internal BST switch on-resistance	I <sub>BST</sub> = 10 mA, T <sub>A</sub> = 25°C			10	Ω
I <sub>BSTLK</sub>	Internal BST switch leakage current	V <sub>BST</sub> = 14 V, V <sub>SW</sub> = 7 V			1	μA
PROTECTION: OVP, UVP, PGOOD, and THERMAL SHUTDOWN						
V <sub>PGDLL</sub>	PGOOD deassert to lower (PGOOD → Low)	Measured at the VOUT pin wrt/ V <sub>REFIN</sub>		84%		
V <sub>PGHYSHL</sub>	PGOOD high hysteresis			8%		
V <sub>PGDLH</sub>	PGOOD de-assert to higher (PGOOD → Low)	Measured at the VOUT pin wrt/ V <sub>REFIN</sub>		116%		
V <sub>PGHYSHH</sub>	PGOOD high hysteresis			−8%		
V <sub>INMINPG</sub>	Minimum VIN voltage for valid PGOOD	Measured at the VIN pin with a 2-mA sink current on PGOOD pin	0.9	1.3	1.5	V
V <sub>OVP</sub>	OVP threshold	Measured at the VOUT pin wrt/ V <sub>REFIN</sub>	117%	120%	123%	
V <sub>UVP</sub>	UVP threshold	Measured at the VOUT pin wrt/ V <sub>REFIN</sub> , device latches OFF, begins soft-stop	65%	68%	71%	
TH <sub>SD</sub>	Thermal shutdown <sup>(1)</sup>	Latch off controller, attempt soft-stop.		145		°C
TH <sub>SD(hys)</sub>	Thermal Shutdown hysteresis <sup>(1)</sup>	Controller re-starts after temperature has dropped		10		°C

(1) Ensured by design, not production tested.

## ELECTRICAL CHARACTERISTICS (continued)

over recommended free-air temperature range,  $V_{VIN} = 5.0\text{ V}$ ,  $PGND = GND$  (unless otherwise noted)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
<b>TIMERS: ON-TIME, MINIMUM OFF-TIME, SS, AND I/O TIMINGS</b>					
$t_{ONESHOTC}$ PWM one-shot <sup>(2)</sup>	$V_{VIN} = 5\text{ V}$ , $V_{VOUT} = 1.05\text{ V}$ , $f_{SW} = 860\text{ KHz}$		240		ns
	$V_{VIN} = 5\text{ V}$ , $V_{VOUT} = 1.05\text{ V}$ , $f_{SW} = 1\text{ MHz}$		210		
	$V_{VIN} = 5\text{ V}$ , $V_{VOUT} = 1.05\text{ V}$ , $f_{SW} = 1.2\text{ MHz}$		175		
	$V_{VIN} = 5\text{ V}$ , $V_{VOUT} = 1.05\text{ V}$ , $f_{SW} = 1.5\text{ MHz}$		140		
$t_{MIN(off)}$ Minimum OFF time	$V_{VIN} = 5\text{ V}$ , $V_{VOUT} = 1.05\text{ V}$ , $f_{SW} = 1\text{ MHz}$ , $DRV_L$ on, $SW = PGND$ , $V_{VOUT} < V_{REFIN}$		360		ns
$t_{INT(SS)}$ Soft-start time	From $EN = HI$ to $V_{OUT} = 95\%$ , default setting		1.6		ms
$t_{INT(SSDLY)}$ Internal soft-start delay time	From $EN = HI$ to $V_{OUT}$ ramp starts		260		$\mu s$
$t_{PGDLY}$ PGOOD startup delay time	External tracking		8		ms
$t_{PGDPDLYH}$ PGOOD high propagation delay time	50 mV over drive, rising edge	0.8	1	1.2	ms
$t_{PGDPDLYL}$ PGOOD low propagation delay time	50 mV over drive, falling edge		10		$\mu s$
$t_{OVPDLY}$ OVP delay time	Time from the $V_{OUT}$ pin out of +20% of $REFIN$ to OVP fault		10		$\mu s$
$t_{UVDLYEN}$ Undervoltage fault enable delay	Time from $EN\_INT$ going high to undervoltage fault is ready		2		ms
	External tracking from $V_{OUT}$ ramp starts		8		
$t_{UVPDLY}$ UVP delay time	Time from the $V_{OUT}$ pin out of -30% of $REFIN$ to UVP fault		256		$\mu s$
<b>LOGIC PINS: I/O VOLTAGE AND CURRENT</b>					
$V_{PGDPD}$ PGOOD pull-down voltage	PGOOD low impedance, $I_{SINK} = 4\text{ mA}$ , $V_{VIN} = 4.5\text{ V}$			0.3	V
$I_{PGDLKG}$ PGOOD leakage current	PGOOD high impedance, forced to 5.5 V	-1	0	1	$\mu A$
$V_{ENH}$ EN logic high	EN, VCCP logic	2			V
$V_{ENL}$ EN logic low	EN, VCCP logic			0.5	V
$I_{EN}$ EN input current				1	$\mu A$
$V_{MODETH}$ MODE threshold voltage <sup>(3)</sup>	Threshold 1	80	130	180	mV
	Threshold 2	200	250	300	
	Threshold 3	370	420	470	
	Threshold 4	1.77	1.80	1.85	V
$I_{MODE}$ MODE current			15		$\mu A$

(2) Ensured by design, not production tested.


(3) See Table 4 for descriptions of MODE parameters.

## TPS51317



SLUSAH9 – MARCH 2011


www.ti.com

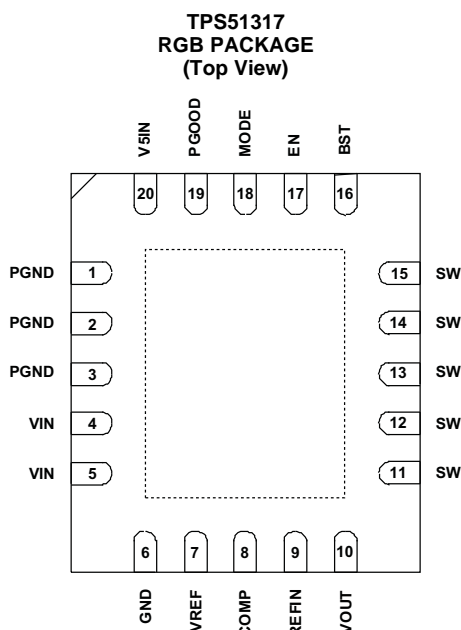

**Table 2. PIN FUNCTIONS**

PIN		I/O	DESCRIPTION
NO.	NAME		
16	BST	I	Power supply for internal high-side gate driver. Connect a 0.1-μF bootstrap capacitor between this pin and the SW pin.
8	COMP	O	Connect series R-C filter between this pin and VREF for loop compensation.
17	EN	I	Enable of the SMPS (3.3-V logic compatible).
6	GND	–	Signal ground.
18	MODE	I	Allows selection of switching frequencies light-load modes. (See <a href="#">Table 4</a> )
1	PGND	I	Power ground. Source terminal of the rectifying low-side power FET. Positive input for current sensing.
2			
3			
19	PGOOD	O	Power good output. Connect pull-up resistor.
9	REFIN		Target output voltage input pin. Apply voltage between 0.6 V to 2.0 V.
11	SW	I/O	Switching node output. Connect to the external inductor. Also serve as current-sensing negative input.
12			
13			
14			
15			
20	V5IN	I	5-V power supply for analog circuits and gate drive.
4	VIN	I	Power supply input pin. Drain terminal of the switching high-side power FET.
5			
10	VOUT	I	Output voltage monitor input pin.
7	VREF	O	2.0-V reference output. Connect a 0.22-μF ceramic capacitor to GND.

## BLOCK DIAGRAM

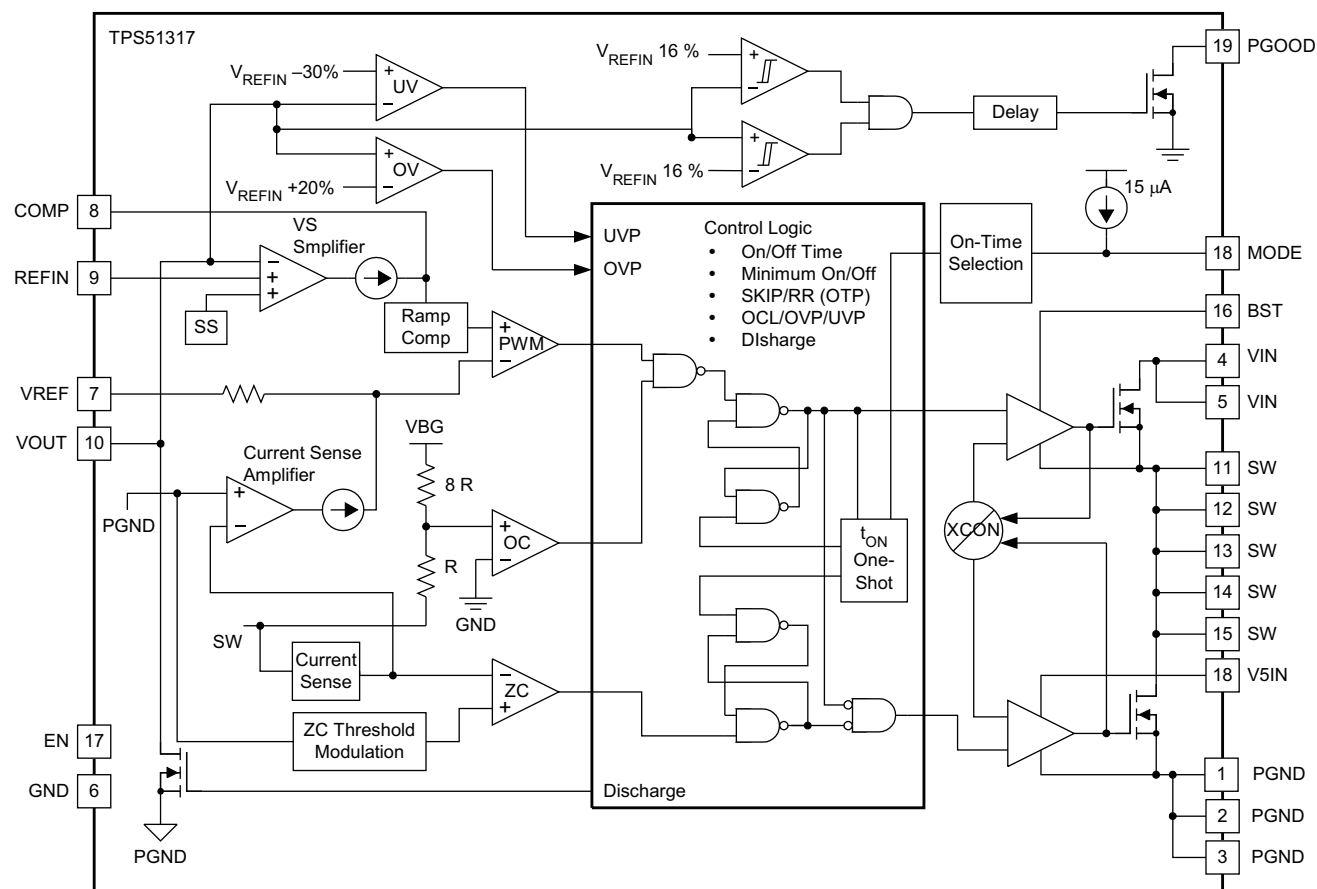

UDG-11058





## Application Circuit List of Materials

Recommended parts for key external components for the circuits in [Figure 1](#) and [Figure 2](#) are listed in [Table 3](#).

**Table 3. Key External Component Recommendations  
 (Figure 1 and Figure 2)**

FUNCTION	MANUFACTURER	PART NUMBER
Output Inductor	Nec-Tokin	MPCG0740LR42C
Ceramic Output Capacitors	Panasonic	ECJ2FB0J226M
	Murata	GRM21BR60J226ME39L

## TPS51317

SLUSAH9 – MARCH 2011

www.ti.com

### APPLICATION INFORMATION

#### Functional Overview


The TPS51317 is a D-CAP+™ mode adaptive on-time converter. Integrated high-side and low-side FET supports output current to a maximum of 6-ADC. The converter automatically runs in discontinuous conduction mode (DCM) to optimize light-load efficiency. Multiple switching frequencies are provided to enable optimization of the power chain for the cost, size and efficiency requirements of the design (see Table 4).

In adaptive on-time converters, the controller varies the on-time as a function of input and output voltage to maintain a nearly constant frequency during steady-state conditions. In conventional constant on-time converters, each cycle begins when the output voltage crosses to a fixed reference level. However, in the TPS51317, the cycle begins when the current feedback reaches an error voltage level which is the amplified difference between the reference voltage and the feedback voltage.

#### PWM Operation

Referring to Figure 3, in steady state, continuous conduction mode, the converter operates in the following way.

Starting with the condition that the top FET is off and the bottom FET is on, the current feedback ( $V_{CS}$ ) is higher than the error amplifier output ( $V_{COMP}$ ).  $V_{CS}$  falls until it hits  $V_{COMP}$ , which contains a component of the output ripple voltage.  $V_{CS}$  is not directly accessible by measuring signals on pins of TPS51317. The PWM comparator senses where the two waveforms cross and triggers the on-time generator.

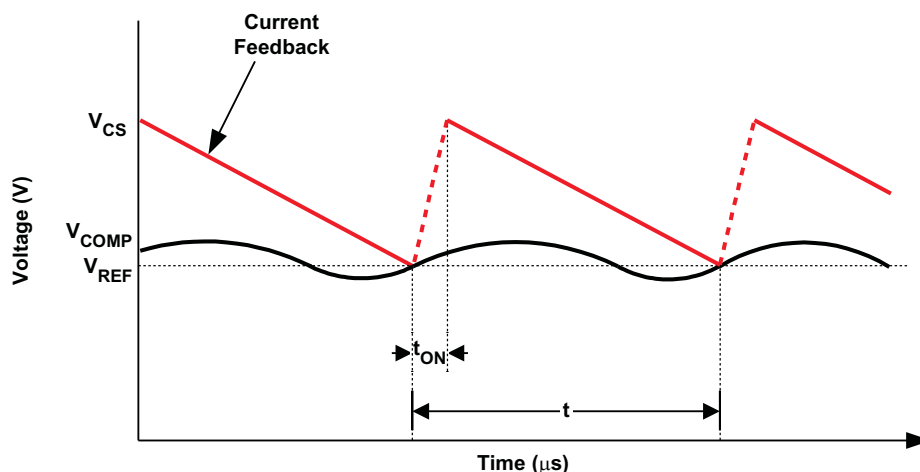

UDG-10187

**Figure 3. D-CAP+™ Mode Basic Waveforms**

The current feedback is an amplified and filtered version of the voltage between PGND and SW during low-side FET on-time. The TPS51317 also provides a single-ended differential voltage ( $V_{OUT}$ ) feedback to increase the system accuracy and reduce the dependence of circuit performance on layout.




## TPS51317




SLUSAH9 – MARCH 2011

www.ti.com

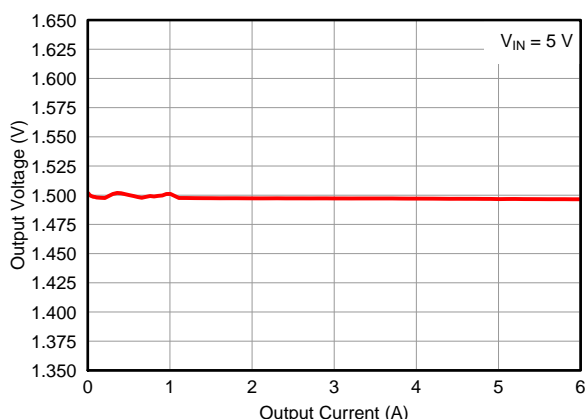

**Figure 5. 1.5-V Load Regulation ( $V_{IN} = 5\text{ V}$ ) Non-Droop Configuration**

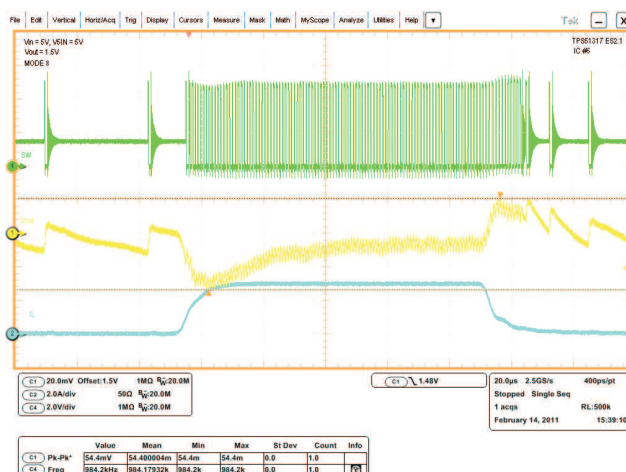

**Figure 6. Non-Droop Configuration Transient Response**

### Droop Configuration

The terminology for droop is the same as *load line* or *voltage positioning* as defined in the Intel CPU  $V_{CORE}$  specification. Based on the actual tolerance requirement of the application, load-line set points can be defined to maximize either cost savings (by reducing output capacitors) or power reduction benefits.

Accurate droop voltage response is provided by the finite gain of the droop amplifier. The equation for droop voltage is shown in Equation 2.

$$V_{DROOP} = \frac{A_{CSINT} \times I(L)}{R_{DROOP} \times G_M}$$


where

- low-side on-resistance is used as the current sensing element
- $A_{CSINT}$  is a constant, which nominally is 53 mV/A.
- $I(L)$  is the DC current of the inductor, or the load current
- $R_{DROOP}$  is the value of resistor from the COMP pin to the VREF pin
- $G_M$  is the transconductance of the droop amplifier with nominal value of 1 mS

Equation 3 can be used to easily derive  $R_{DROOP}$  for any load line slope/droop design target.

$$R_{LOAD\_LINE} = \frac{V_{DROOP}}{I(L)} = \frac{A_{CSINT}}{R_{DROOP} \times G_M} \therefore R_{DROOP} = \frac{A_{CSINT}}{R_{LOAD\_LINE} \times G_M}$$


Figure 7 shows the basic implementation of the droop mode using the TPS51317.

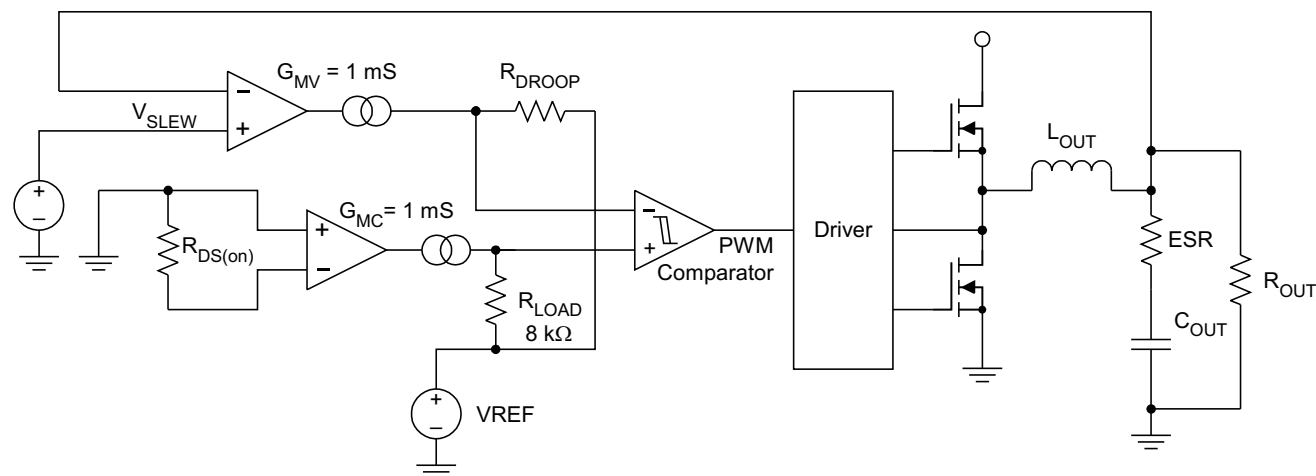

UDG-10188

**Figure 7. DROOP Mode Basic Implementation**

The droop (voltage positioning) method was originally recommended to reduce the number of external output capacitors required. The effective transient voltage range is increased because of the active voltage positioning (see Figure 8).

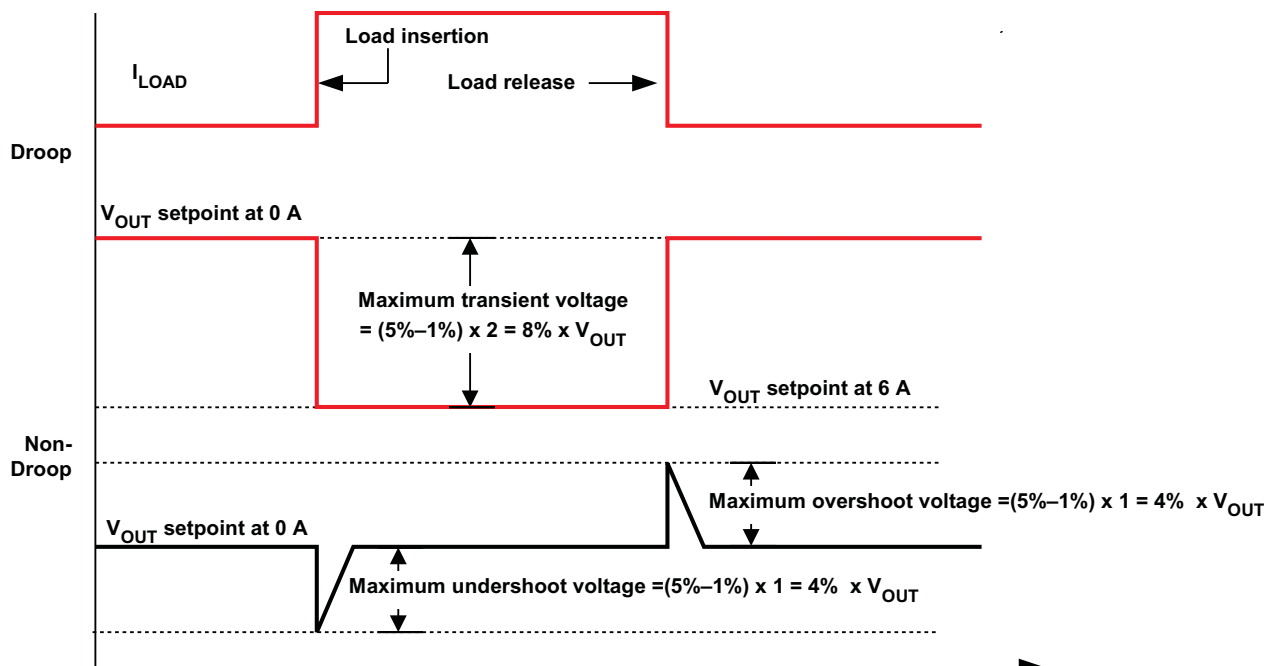

UDG-11080

**Figure 8. DROOP vs Non-DROOP in Transient Voltage Window**

In applications where the DC and the AC tolerances are not separated, which means there is not a strict DC tolerance requirement, the droop method can be used.

# TPS51317



SLUSAH9 – MARCH 2011

www.ti.com


**Table 4. Mode Definitions**

MODE	MODE RESISTANCE (kΩ)	LIGHT-LOAD POWER SAVING MODE	SWITCHING FREQUENCY (f <sub>sw</sub> ) (MHz)
1	0	SKIP	0.86
2	12	SKIP	1.2
3	22	SKIP	1.5
4	33	RR <sup>(1)</sup>	1.0
5	47	RR <sup>(1)</sup>	0.86
6	68	PWM	1.2
7	100	PWM	1.5
8	OPEN	SKIP	1.0


(1) Ripple reduction is a special light-load power saving feature. See (Light-Load Power Saving Features)

Figure 9 shows the load regulation of the 1.5-V rail using an R<sub>DRPOOP</sub> value of 5 kΩ.

Figure 10 shows the transient response of the TPS51317 using droop configuration and C<sub>OUT</sub> = 6 × 22 μF. The applied step load is from 0 A to 3 A.

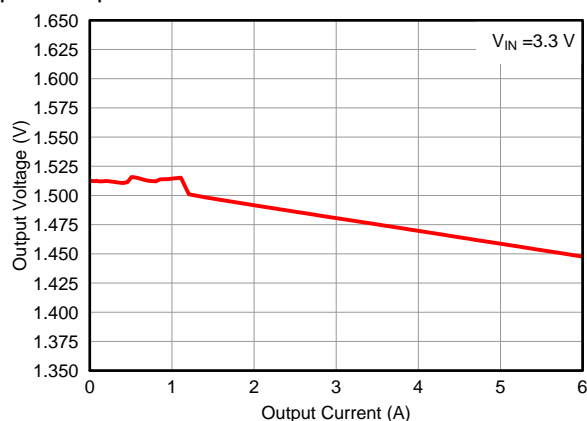

**Figure 9. 1.5-V Load Regulation (V<sub>IN</sub> = 5 V)**

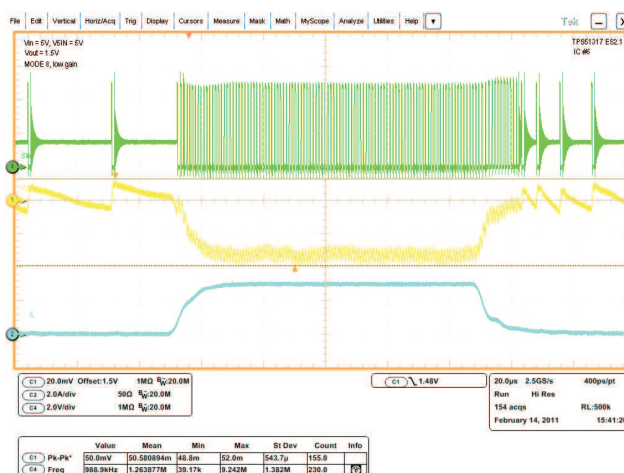

**Figure 10. Droop Configuration Transient Response, C<sub>OUT</sub> = 6 × 22 μF and 0 A to 3 A**

## Light-Load Power Saving Features

The TPS51317 has an automatic pulse-skipping mode to provide excellent efficiency over a wide load range. The converter senses inductor current and prevents negative flow by shutting off the low-side gate driver. This saves power by eliminating re-circulation of the inductor current. Further, when the bottom FET shuts off, the converter enters discontinuous mode, and the switching frequency decreases, thus reducing switching losses as well.

TPS51317 also provides a special light-load power saving feature, called ripple reduction. Essentially, it reduces the on-time in SKIP mode to effectively reduce the output voltage ripple associated with using an all MLCC capacitor output power stage design.

## Power Sequences

### Non-Tracking Startup

The TPS51317 can be configured for non-tracking application. When non-tracking is configured, output voltage is regulated to the REFIN voltage which taps off the voltage dividers from the 2VREF. Either the EN pin or the V5IN pin can be used to start up the device. The TPS51317 uses internal voltage servo DAC to provide a precise 1.6-ms soft-start time during soft-start initialization. (See [Figure 11](#))

### Tracking Startup

TPS51317 can also be configured for tracking application. When tracking configuration is desired, output voltage is also regulated to the REFIN voltage which comes from external power source. In order for TPS51317 to differentiate between a non-tracking configuration or a tracking configuration, there is a minimum delay time of 260  $\mu$ s required between the time when the EN pin or the V5IN pin is validated to the time when the REFIN pin voltage can be applied, in order for the TPS51317 to track properly (see [Figure 12](#)). The valid REFIN voltage range is between 0.6 V to 2 V.

## Protection Features

The TPS51317 offers many features to protect the converter power chain as well as the system electronics.

### 5-V Undervoltage Protection (UVLO)

The TPS51317 continuously monitors the voltage on the V5IN pin to ensure that the voltage level is high enough to bias the device properly and to provide sufficient gate drive potential to maintain high efficiency. The converter starts with approximately 4.3 V and has a nominal of 440 mV of hysteresis. If the 5-V UVLO limit is reached, the converter transitions the phase node into a off function. And the converter remains in the off state until the device is reset by cycling 5 V until the 5-V POR is reached (2.3-V nominal). The power input does not have an UVLO function

### Power Good Signals

The TPS51317 has one open-drain *power good* (PGOOD) pin. During startup, there is a 1-ms power good high propagation delay. The PGOOD pin de-asserts as soon as the EN pin is pulled low or an undervoltage condition on V5IN or any other faults that require latch off action is detected.

### Output Overvoltage Protection (OVP)

In addition to the power good function described above, the TPS51317 has additional OVP and UVP thresholds and protection circuits.

An OVP condition is detected when the output voltage is approximately  $120\% \times V_{REFIN}$ . In this case, the converter de-asserts the PGOOD signals and performs the overvoltage protection function. The converter remains in this state until the device is reset by cycling 5 V until the 5-V POR threshold (2.3 V nominal) is reached.

### Output Undervoltage Protection (UVP)

Output undervoltage protection works in conjunction with the current protection described in the [Overcurrent Protection](#) and [Overcurrent Limit](#) sections. If the output voltage drops below 70% of  $V_{REFIN}$ , after an 8- $\mu$ s delay, the device latches OFF. Undervoltage protection can be reset only by EN or a 5-V POR.



## TPS51317

SLUSAH9 – MARCH 2011

[www.ti.com](http://www.ti.com)

### Overcurrent Protection

Both positive and negative overcurrent protection are provided in the TPS51317:

- Overcurrent Limit (OCL)
- Negative OCL (level same as positive OCL)

#### Overcurrent Limit

If the sensed current value is above the OCL setting, the converter delays the next ON pulse until the current drops below the OCL limit. Current limiting occurs on a pulse-by-pulse basis. The TPS51317 uses a valley current limiting scheme where the DC OCL trip point is the OCL limit plus half of the inductor ripple current. The minimum valley OCL is 6 A over process and temperature.

During the overcurrent protection event, the output voltage likely droops until the UVP limit is reached. Then, the converter de-asserts the PGOOD pin, and then latches OFF after an 8-μs delay. The converter remains in this state until the device is reset.

$$I_{OCL(dc)} = I_{OCL(valley)} + \frac{1}{2} \times I_{P-P} \quad (4)$$

#### Negative OCL

The negative OCL circuit acts when the converter is sinking current from the output capacitor(s). The converter continues to act in a *valley* mode, the absolute value of the negative OCL set point is typically -6.5 A.

### Thermal Protection

#### Thermal Shutdown

The TPS51317 has an internal temperature sensor. When the temperature reaches a nominal 145°C, the device shuts down until the temperature cools by approximately 10°C. Then the converter restarts.

## Startup Timing Diagrams

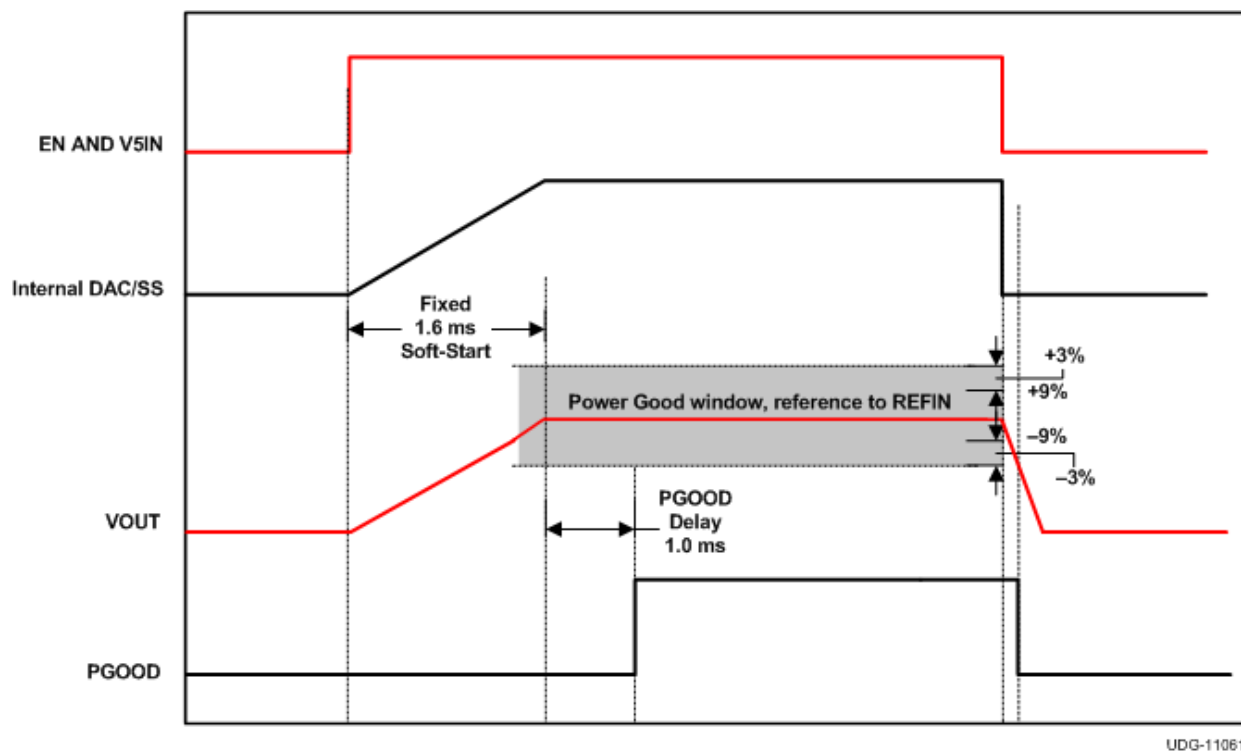


Figure 11. Non-Tracking Start-Up

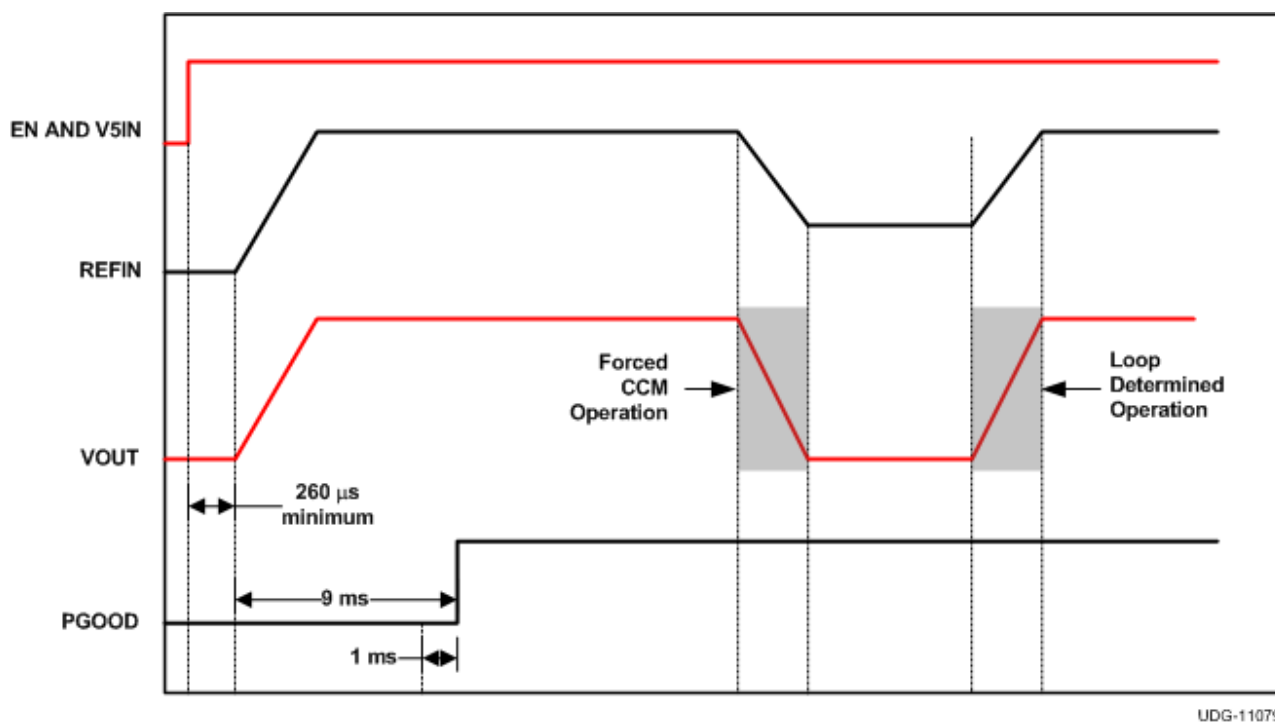


Figure 12. Tracking Start-Up

## TPS51317



SLUSAH9 – MARCH 2011

www.ti.com

### TYPICAL CHARACTERISTICS

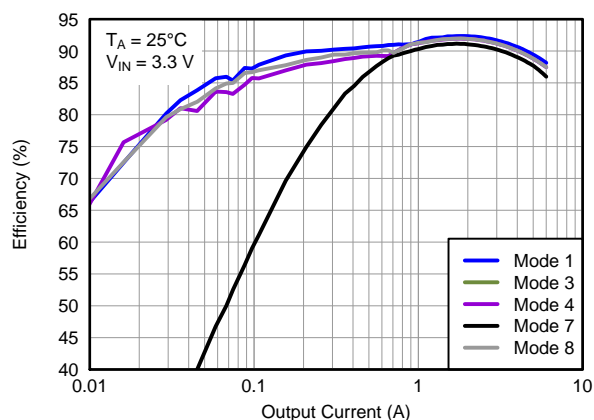


Figure 13. Efficiency vs Output Current

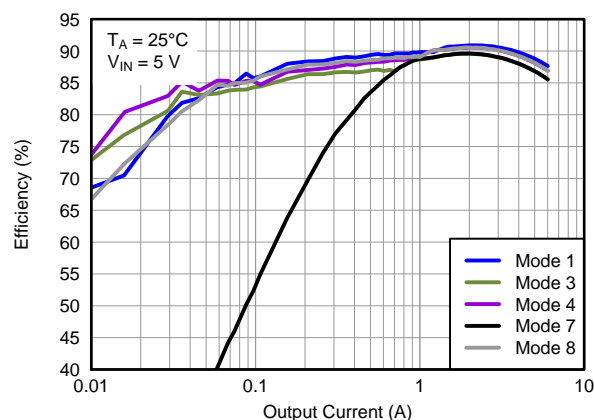


Figure 14. Efficiency vs Output Current

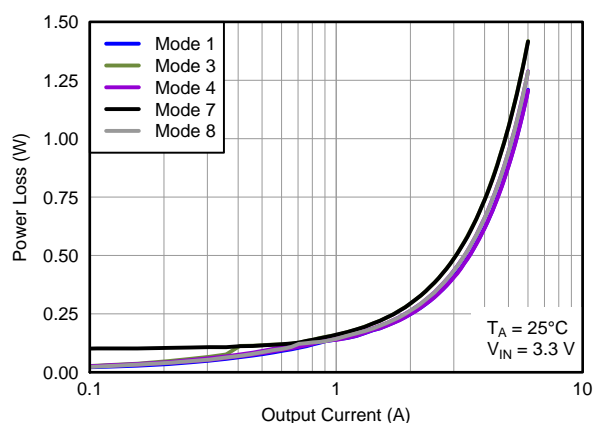


Figure 15. Power Loss

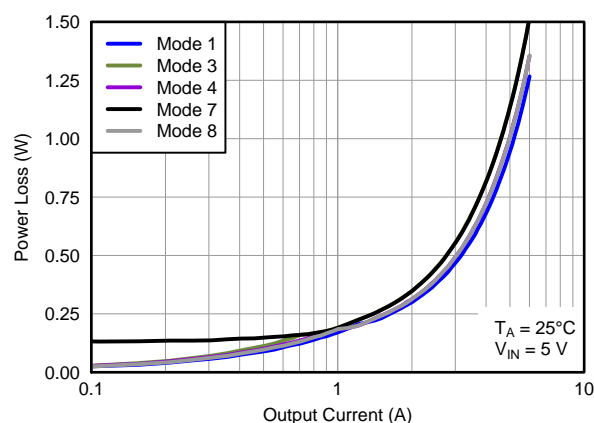


Figure 16. Power Loss

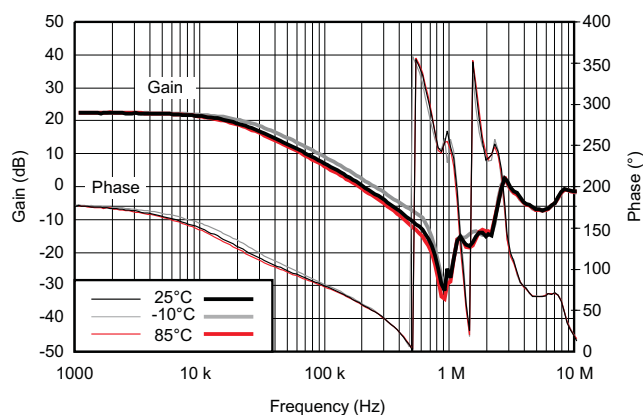


Figure 17. Bode Plot (Non-Droop Mode)  $V_{IN} = 5\text{ V}$ ,  $V_{OUT} = 0.8\text{ V}$ ,  $I_{LOAD} = 5\text{ A}$

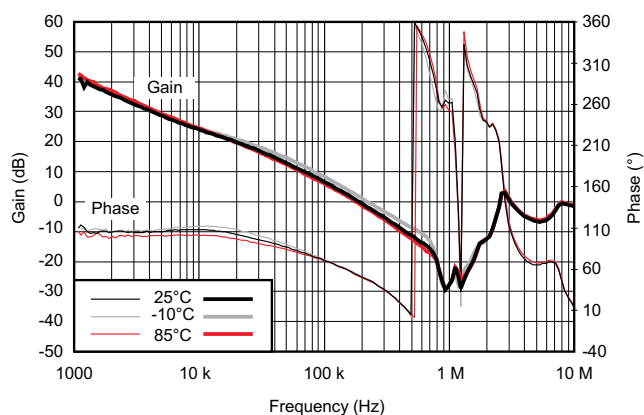


Figure 18. Bode Plot (Droop Mode),  $V_{IN} = 5\text{ V}$ ,  $V_{OUT} = 0.8\text{ V}$ ,  $I_{LOAD} = 5\text{ A}$

## DESIGN PROCEDURE

The simplified design procedure is done for a non-droop application using the TPS51317 converter.

### Step One

Determine the specifications.

The Rail requirements provide the following key parameters:

1.  $V_{OUT} = 1.5\text{ V}$
2.  $I_{CC(max)} = 6\text{ A}$
3.  $I_{DYN(max)} = 3\text{ A}$
4.  $I_{CC(tdc)} = 3\text{ A}$

### Step Two

Determine system parameters.

The input voltage range and operating frequency are of primary interest. For example:

1.  $V_{IN} = 5\text{ V}$
2.  $f_{SW} = 1\text{ MHz}$

### Step Three

Determine inductor value and choose inductor.

Smaller values of inductor have better transient performance but higher ripple and lower efficiency. Higher values have the opposite characteristics. It is common practice to limit the ripple current to 25% to 50% of the maximum current. In this case, use 40%:

$$I_{P-P} = 6\text{ A} \times 0.4 = 2.4\text{ A} \quad (5)$$

At  $f_{SW} = 1\text{ MHz}$ , with a 5-V input and a 1.5-V output:

$$L = \frac{V \times dT}{I_{P-P}} = \frac{(V_{IN} - V_{OUT}) \times \left( \frac{V_{OUT}}{(f_{SW} \times V_{IN})} \right)}{I_{P-P}} = \frac{(5 - 1.5) \times \left( \frac{1.5}{(1 \times 5)} \right)}{2.4\text{ A}} = 0.43\text{ }\mu\text{H} \quad (6)$$

For this application, a 0.42- $\mu\text{H}$ , 1.55-m $\Omega$  inductor from NEC-TOKIN with part number MPCG0740LR42C is chosen.

### Step Four

Set the output voltage.

$$V_{OUT} = \frac{V_{VREF}}{R_{UPPER} + R_{LOWER}} \times R_{LOWER} \quad (7)$$

The output voltage is determined by the 2-V reference ( $V_{REF}$ ) and the resistor dividers ( $R_{UPPER}$  and  $R_{LOWER}$ ). The output voltage is regulated to the REFIN pin. Because the 2-V reference current capability is limited to less than 50  $\mu\text{A}$ , care should be taken when selecting the resistor dividers. For the current reference design of 1.5 V (see application schematics shown in [Figure 1](#) and [Figure 2](#),  $R_{UPPER} = 100\text{ k}\Omega$ ,  $R_{LOWER} = 300\text{ k}\Omega$ ).

### Step Five

Calculate OCL.

The DC OCL level of TPS51317 design is determined by [Equation 8](#),

$$I_{OCL(dc)} = I_{OCL(valley)} + \frac{1}{2} \times I_{P-P} = 6\text{ A} + \frac{1}{2} \times 1.5\text{ A} = 6.75\text{ A} \quad (8)$$

## TPS51317

SLUSAH9 – MARCH 2011

www.ti.com

The minimum valley OCL is 6 A over process and temperature, and  $I_{P,P} = 1.5$  A, the minimum DC OCL is calculated to be 6.75A.

### Step Six

Determine the output capacitance.

To determine  $C_{OUT}$  based on transient and stability requirement, first calculate the the minimum output capacitance for a given transient.

Equation 10 and Equation 9 can be used to estimate the amount of capacitance needed for a given dynamic load step/release. Please note that there are other factors that may impact the amount of output capacitance for a specific design, such as ripple and stability. Equation 10 and Equation 9 are used only to estimate the transient requirement, the result should be used in conjunction with other factors of the design to determine the necessary output capacitance for the application.

$$C_{OUT(min\_under)} = \frac{L \times \Delta I_{LOAD(max)}^2 \times \left( \frac{V_{VOUT} \times t_{SW}}{V_{IN(min)}} + t_{MIN(off)} \right)}{2 \times \Delta V_{LOAD(insert)} \times \left( \left( \frac{V_{IN(min)} - V_{VOUT}}{V_{IN(min)}} \right) \times t_{SW} - t_{MIN(off)} \right) \times V_{VOUT}} \quad (9)$$

$$C_{OUT(min\_over)} = \frac{L_{OUT} \times (\Delta I_{LOAD(max)})^2}{2 \times \Delta V_{LOAD(release)} \times V_{VOUT}} \quad (10)$$

Equation 9 and Equation 10 calculate the minimum  $C_{OUT}$  for meeting the transient requirement, which is 84  $\mu$ F assuming the following:

- $\pm 3\%$  voltage allowance for load step and release
- MLCC capacitance derating of 60% due to DC and AC bias effect

In this reference design, 6, 22- $\mu$ F capacitors are used in order to provide this amount of capacitance.

### Step Seven

Determine the stability based on the output capacitance  $C_{OUT}$ .

In order to achieve stable operation. The 0-dB frequency,  $f_0$  should be kept less than 1/5 of the switching frequency (1 MHz). (See Figure 4)

$$f_0 = \frac{1}{2\pi} \times \frac{G_M}{C_{OUT}} \times \frac{R_C}{R_S} = 190 \text{ kHz}$$

where

$$R_S = R_{DS(on)} \times G_{MC} \times R_{LOAD} \quad (11)$$

$$R_C = \frac{f_0 \times R_S \times 2\pi \times C_{OUT}}{G_M} = \frac{190 \text{ kHz} \times 53 \text{ m}\Omega \times 2\pi \times 80 \mu\text{F}}{1 \text{ mS}} \approx 5 \text{ k}\Omega \quad (12)$$

Using 6, 22- $\mu$ F capacitors, the compensation resistance,  $R_C$  can be calculated to be approximately 5 k $\Omega$ .

The purpose of the comparator capacitor ( $C_C$ ) is to reduce the DC component to obtain high DC feedback gain. However, as it causes phase delay, another zero to cancel this effect at  $f_0$  is needed. This zero can be determined by values of  $C_C$  and the compensation resistor,  $R_C$ .

$$f_z = \frac{1}{2\pi \times R_C \times C_C} = \frac{f_0}{10} \quad (13)$$

And since  $R_C$  has previously been derived, the value of  $C_C$  is calculated to be 2.2 nF. In order to further boost phase margin, a value of 3.3-nF is chosen for this reference design.

### Step Eight

Select decoupling and peripheral components.

For TPS51317 peripheral capacitors use the following minimum values of ceramic capacitance. X5R or better temperature coefficient is recommended. Tighter tolerances and higher voltage ratings are always appropriate.

- V5IN decoupling  $\geq 22 \mu\text{F}$ ,  $\geq 10 \text{ V}$
- VREF decoupling  $0.22 \mu\text{F}$  to  $1 \mu\text{F}$ ,  $\geq 4 \text{ V}$
- Bootstrap capacitors  $\geq 0.1 \mu\text{F}$ ,  $\geq 10 \text{ V}$
- Pull-up resistors on PGOOD,  $100 \text{ k}\Omega$

### Layout Considerations

Good layout is essential for stable power supply operation. Follow these guidelines for an efficient PCB layout.

- Connect PGND pins (or at least one of the pins) to the thermal PAD underneath the device. Also connect GND pin to the thermal PAD underneath the device. Use four vias to connect the thermal pad to internal ground planes.
- Place VIN, V5IN and 2VREF decoupling capacitors as close to the device as possible.
- Use wide traces for the VIN, VOUT, PGND and SW pins. These nodes carry high current and also serve as heat sinks.
- Place feedback and compensation components as close to the device as possible.
- Keep COMP analog signal away from noisy signals (SW, BST).



PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Op Temp (°C)	Top-Side Markings (4)	Samples
TPS51317RGBR	ACTIVE	VQFN	RGB	20	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	51317	<a href="#">Samples</a>
TPS51317RGBT	ACTIVE	VQFN	RGB	20	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	51317	<a href="#">Samples</a>

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) Multiple Top-Side Markings will be inside parentheses. Only one Top-Side Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Top-Side Marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**




\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS51317RGBR	VQFN	RGB	20	3000	330.0	12.4	3.8	4.3	1.5	8.0	12.0	Q1
TPS51317RGBR	VQFN	RGB	20	3000	330.0	12.4	3.8	4.3	1.5	8.0	12.0	Q1
TPS51317RGBT	VQFN	RGB	20	250	180.0	12.4	3.8	4.3	1.5	8.0	12.0	Q1
TPS51317RGBT	VQFN	RGB	20	250	180.0	12.4	3.8	4.3	1.5	8.0	12.0	Q1



**TAPE AND REEL BOX DIMENSIONS**

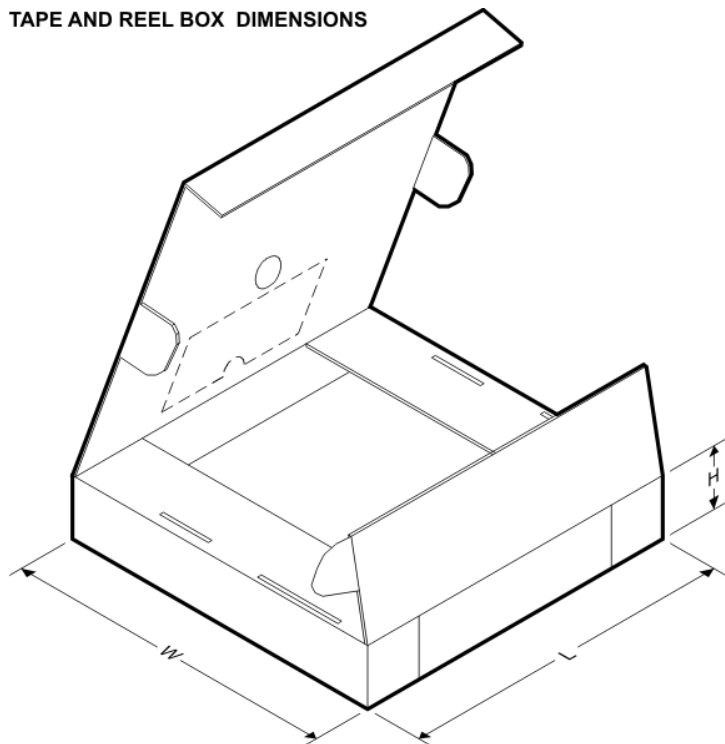


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS51317RGBR	VQFN	RGB	20	3000	367.0	367.0	35.0
TPS51317RGBR	VQFN	RGB	20	3000	367.0	367.0	35.0
TPS51317RGBT	VQFN	RGB	20	250	210.0	185.0	35.0
TPS51317RGBT	VQFN	RGB	20	250	210.0	185.0	35.0

## MECHANICAL DATA

RGB (R-PVQFN-N20)

PLASTIC QUAD FLATPACK NO-LEAD

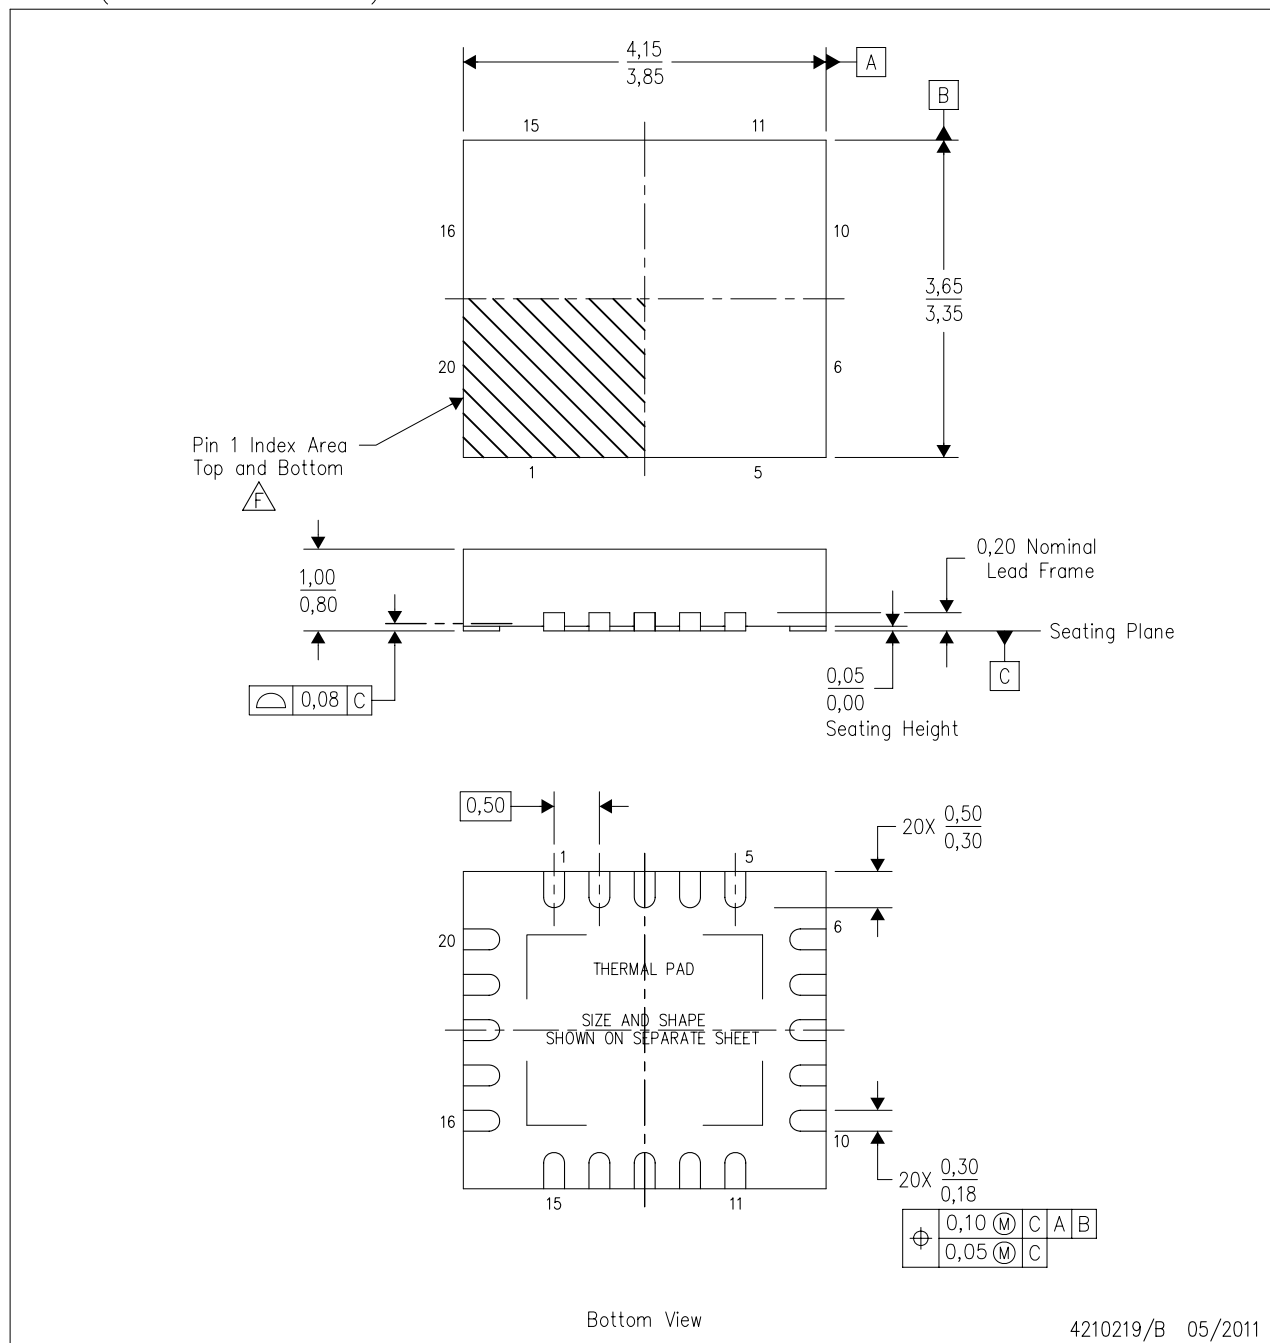

- NOTES:
- All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - This drawing is subject to change without notice.
  - QFN (Quad Flatpack No-Lead) package configuration.
  - The package thermal pad must be soldered to the board for thermal and mechanical performance.
  - See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
- F** Pin 1 identifiers are located on both top and bottom of the package and within the zone indicated. The Pin 1 identifiers are either a molded, marked, or metal feature.

## THERMAL PAD MECHANICAL DATA

RGB (R-PVQFN-N20)


PLASTIC QUAD FLATPACK NO-LEAD

### THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

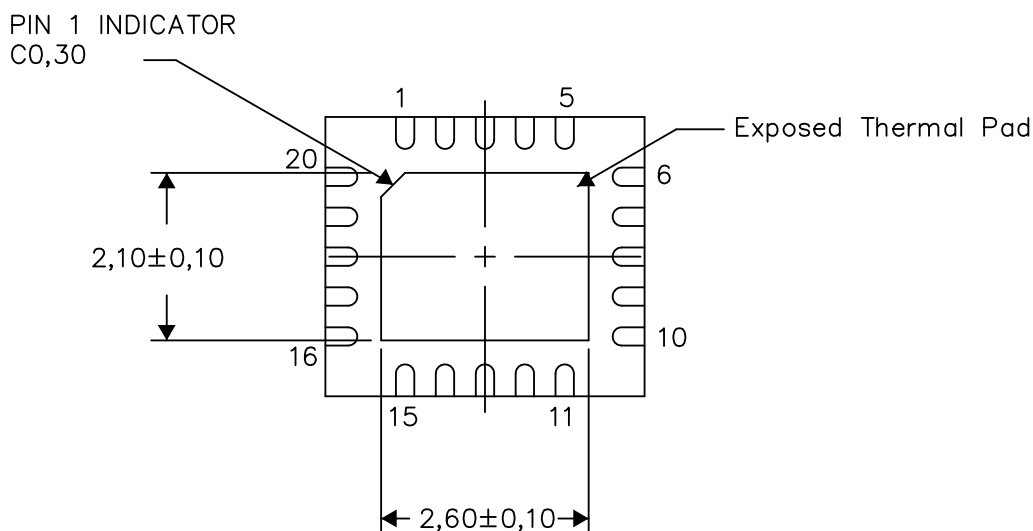

Bottom View

Exposed Thermal Pad Dimensions


4210242/C 05/12

NOTE: All linear dimensions are in millimeters

## LAND PATTERN DATA

RGB (R-PVQFN-N20)

PLASTIC QUAD FLATPACK NO-LEAD

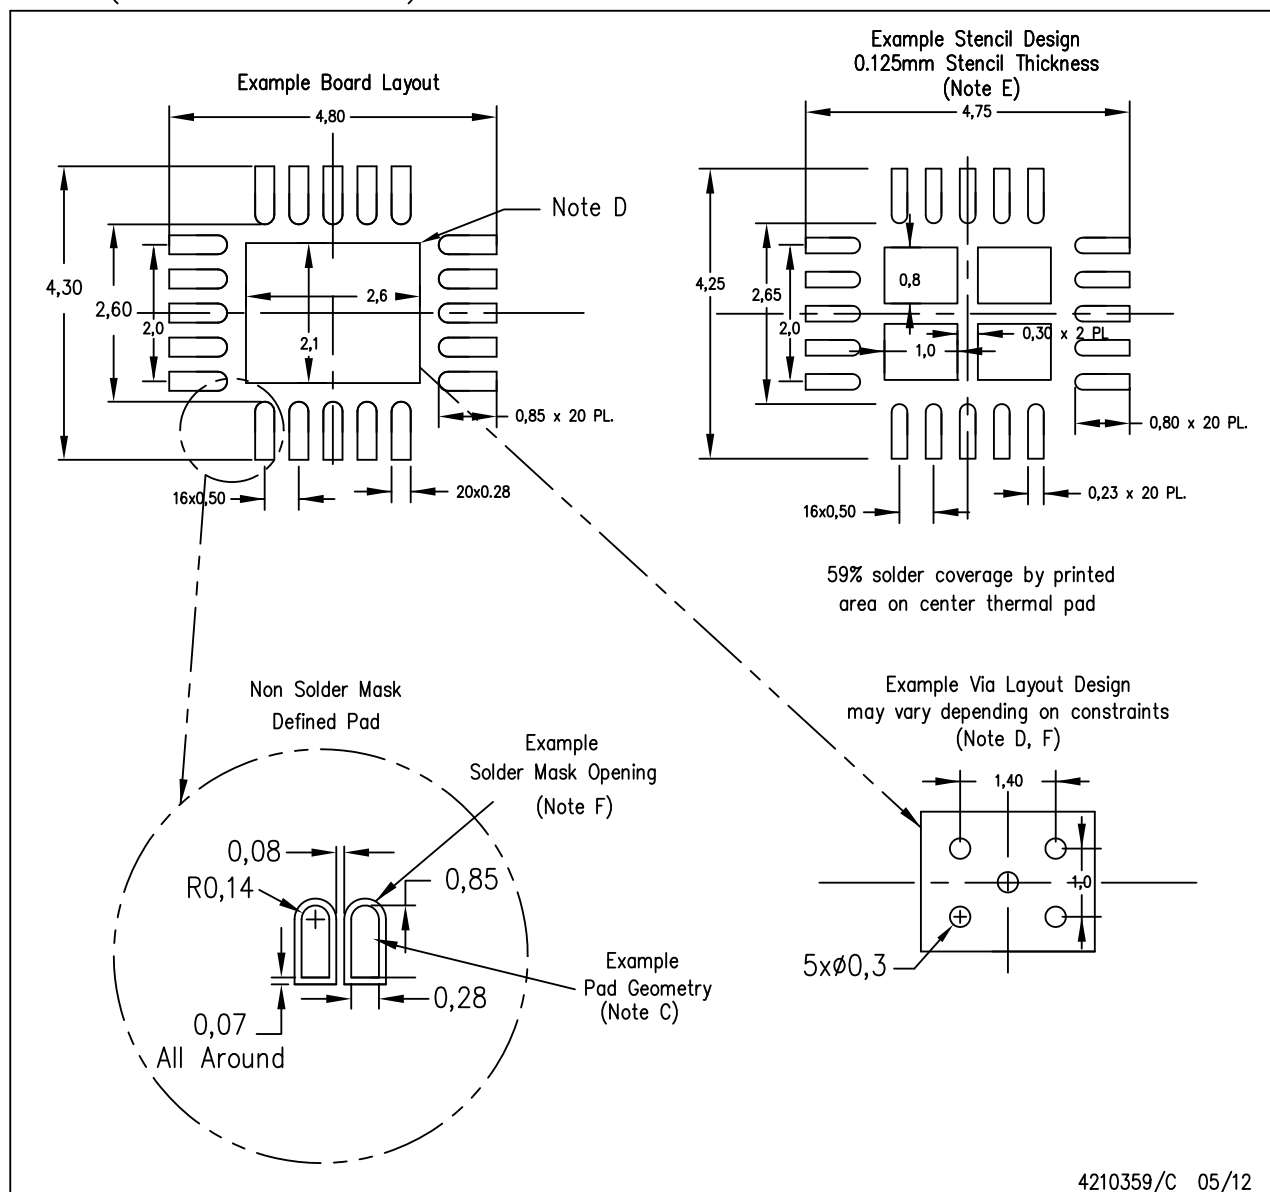

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)