

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)
[112951](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
A	06/05/03	UPDATE DRAWING FORMAT

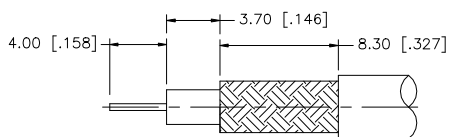

RECOMMENDED CABLE
STRIPPING DIM'S

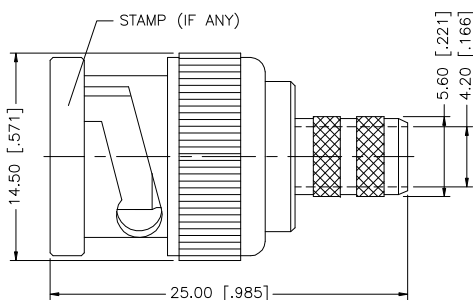

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 ± ± 0.007" .315 – 1.180 ± ± 0.015" 1.180 – 4.724 ± ± 0.020"	APPROVALS	DATE	Amphenol Connex						
7						DRAWN	G.R.S.						06/05/03	
6						CHECKED								
5						ISSUED			PART DESCRIPTION	BNC CRIMP PLUG (FOR 734A CABLE)				
4	FERRULE	COPPER	NICKEL	1		SHEET	1 OF 1		PART NO.					112951
3	INSULATOR	TEFLON	NATURAL	1										
2	CONTACT PIN	BRASS	GOLD	1										
1	BODY	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/112/112951.DWG		DWG. NO.	112951.DWG		REV. A	SIZE A	SCALE NA