

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
132103](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
NC	04/31/03	INITIAL RELEASE
A	10/27/05	MODIFY - INSULATOR NOW INTERNAL



RECOMMENDED CABLE
STRIPPING DIMS.

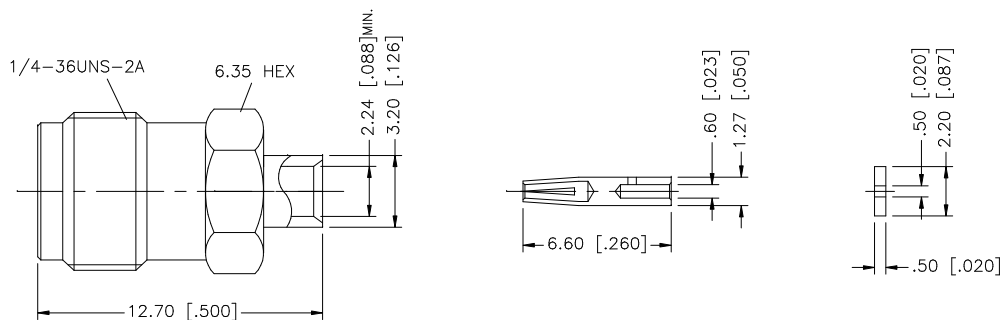

NOTE:
1. CONTACT PIN TO SOLDER

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex				
7						DRAWN	G.R.S.					10/27/05
6						CHECKED						
5							ISSUED			SMA DIRECT SOLDER JACK (FOR .085", .086" CABLE)		
4	INSULATOR	TEFLON	NATURAL	1							PART NO.	132103
3	CONTACT PIN	BER. COPPER	GOLD	1		SHEET	1 OF 1					
2	INSULATOR	TEFLON	NATURAL	1								
1	BODY	BRASS	GOLD	1								
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE	C:/132/132103.DWG	DWG. NO.	132103.DWG	REV. A	SIZE A	SCALE NA
					DO NOT SCALE DRAWING							