

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
112544](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
A	06/06/05	UPDATE DRAWING FORMAT
B	01/22/07	MODIFY CONTACT PIN I.D. TO 0.9mm

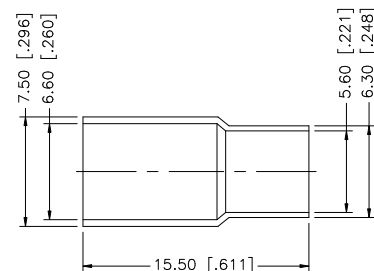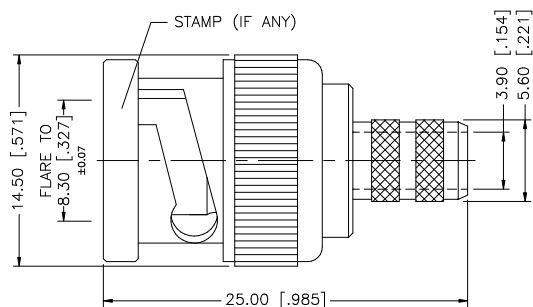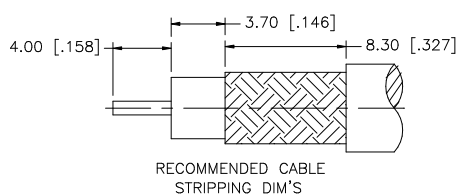

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex								
8				DRAWN		G.R.S.	01/22/07											
7				CHECKED				PART DESCRIPTION										
6				ISSUED														
5	FERRULE	COPPER	NICKEL	1		SHEET	1 OF 1		PART NO.									
4	GASKET	RUBBER	RED	1														
3	INSULATOR	DELIRIN	NATURAL	1				112544										
2	CONTACT PIN	BRASS	GOLD	1														
1	SHELL /BODY	BRASS	NICKEL	1	CAD FILE		C:/112/112544.DWG		DWG. NO.	112544.DWG		REV.	B	SIZE	A	SCALE	NA	
DESCRIPTION					MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING										