

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
112624](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
NC	05/17/99	INITIAL RELEASE
A	04/06/06	UPDATE DRAWING FORMAT
B	02/05/07	MODIFY NOTES



RECOMMENDED
MOUNTING HOLE

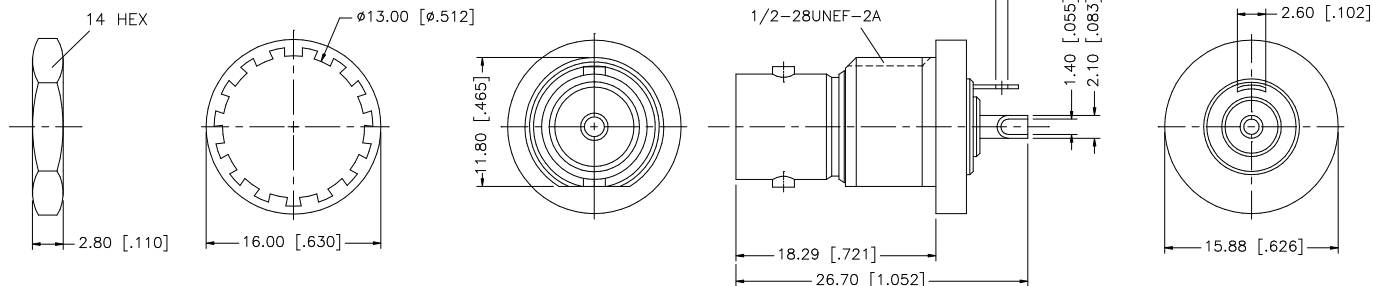

NOTE:

1. MAX. PANEL THICKNESS = 2.5mm
2. CONTACT PLATING: GOLD PL. 50MIN THICK
OVER NICKEL PL. 100MIN THICK OVER COPPER STRIKE.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex					
7						DRAWN	G.R.S.						02/05/07
6						CHECKED			PART DESCRIPTION BNC BULKHEAD ISOLATED RECEPT. JACK 50ohm				
5	HEX NUT	BRASS	NICKEL	1		ISSUED							
4	LOCK WASHER	BRASS	NICKEL	1				PART NO. 112624					
3	CONTACT PIN	PHOS. BRONZE	SEE NOTE 2	1	SHEET	1 OF 1							
2	INSULATOR	TEFLON	NATURAL	1				DWG. NO. 112624.DWG					
1	BODY	BRASS	NICKEL	1	CAD FILE	C:/112/112624.DWG							REV. B
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING								