

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[OSTVP196585](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

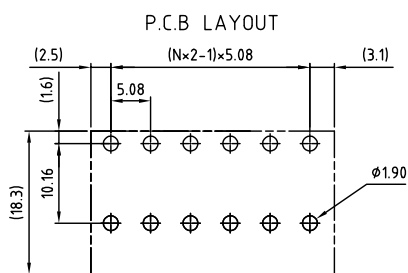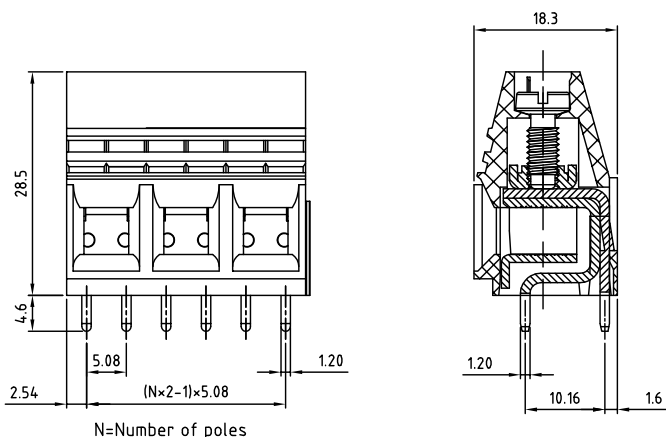

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material

- Terminal body
(metal housing) : Steel stamping
- Terminal screw : Steel Zinc plating "-" slot type
- Contacts : Brass
- Surface of solder tail : Tin plated
- Insulator (housing) : Thermoplastic (UL94V-0)

Electrical

- Voltage rating : 300V
- Current rating : 57A
- Wire range :
Solid wire (AWG) : 8-22
Stranded wire (AWG) : 8-22
- Torque (LB-In.) : 19
- Screw : M4
- Wire strip length : 10-11mm
- Withstanding voltage : 1.6KV
- Operating temperature : -30°C+105°C
- Soldering temperature : 250°C+10°C/5 Sec
- Safety Approval : CE, UL

RoHS Compliant

PART NUMBER:

OSTVPXX6585

No. of Poles	COLOR
02 2 Poles	0: Black
03 3 Poles	5: Green
...	6: Blue
12 12 Poles	8: Grey (Standard)



TITLE		OSTVP 10.16mm Series (double contact) with steel stamping, 2p-12p			
PART NO.	OSTVPXX6585	DWG NO.	OSTVPXX6585.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
Shi Jun 2006.10.23	Marvin 2006.10.23	Marvin 2006.10.23	Marvin 2006.10.23		X ±0.50
					X.X ±0.30
					X.XX ±0.10
					X* ±1*
				SHEET: 01/01	REV: F