

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[OSTYM200150](#)



For any questions, you can email us directly:

sales@integrated-circuit.com

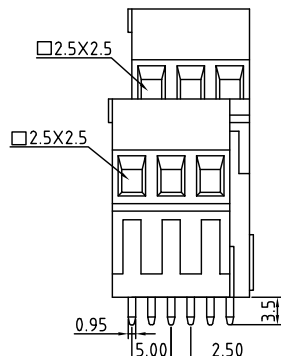

N=Number of poles

P.C.B LAYOUT

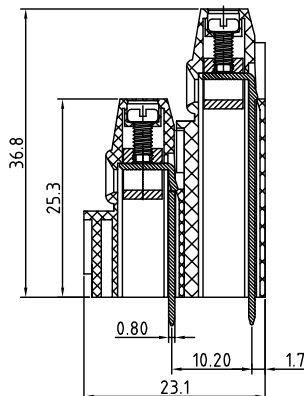

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material

- Terminal body
- (metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Contacts: Brass
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
 - Solid wire(AWG): 12-24
 - Stranded wire(AWG): 12-24
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: CE, RoHS

RoHS Compliant

PART NUMBER:

OSTYMX0150

No. of Poles

- 04: 2x02 Poles
- 06: 2x03 Poles
- : : 2x04 Poles
- 48 2x24 Poles

COLOR

- 0: Black
- 5: Green (Standard)
- 6: Blue
- 8: Grey

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



ON-SHORE TECHNOLOGY, INC.

TITLE		OSTYM-5.0mm Series Left	
PART NO.	OSTYMX0150	DWG NO.	OSTYMX0150.DWG
APPROVED	Shi Jun 2006.10.20	CUST NO.	
CHECKED	Shi Jun 2006.10.20	UNIT:	mm
DESIGNED	xionghaitao 2006.10.20	SCALE:	NONE
DRAWN	xionghaitao 2006.10.20	SHEET:	01/01
		REV:	D
		Tolerance	X ±0.50 X.X ±0.30 X.XX ±0.10 X* ±1*