

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[OSTYB242150](#)



For any questions, you can email us directly:

sales@integrated-circuit.com

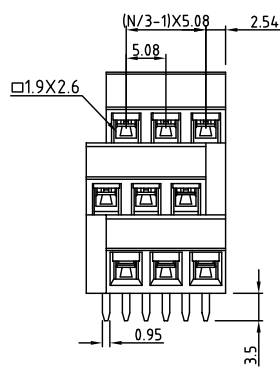

N=Number of poles

P.C.B LAYOUT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material

- Terminal body
- (metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Contacts: Brass
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
 - Solid wire(AWG): 14-24
 - Stranded wire(AWG): 14-24
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: CE, RoHS

RoHS Compliant

PART NUMBER:

OSTYBXX2150

No. of Poles

06: 3x02 Poles
09: 3x03 Poles
12: 3x04 Poles
15: 3x05 Poles
18: 3x06 Poles
21: 3x07 Poles
24: 3x08 Poles

COLOR

0: Black
5: Green (Standard)
6: Blue
8: Grey



ON-SHORE TECHNOLOGY, INC.

TITLE		OSTYB-5.08mm Series	
PART NO.	OSTYBXX2150	DWG NO.	OSTYBXX2150.DWG
APPROVED	Shi Jun 2006.10.20	CUST NO.	
CHECKED	Shi Jun 2006.10.20	UNIT:	mm
DESIGNED	xionghaitao 2006.10.20	SCALE:	NONE
DRAWN	xionghaitao 2006.10.20	REV:	D
SHEET: 01/01		Tolerance	
		X ±0.50	
		X.X ±0.30	
		X.XX ±0.10	
		X* ±1*	