

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[On-Shore Technology, Inc.](#)
[OSTVO201250](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

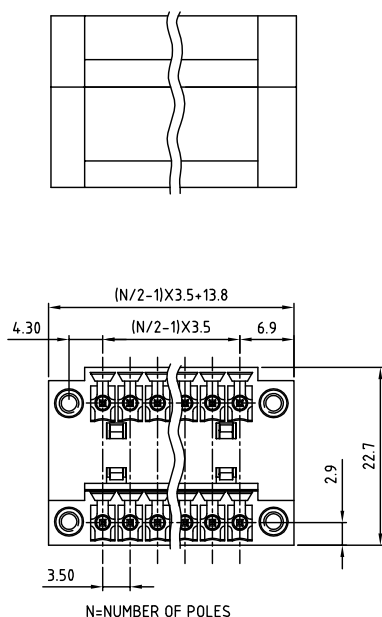

P.C.B LAYOUT

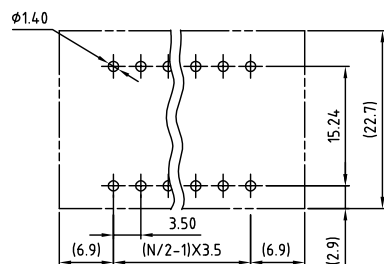

Material

- Contact: Brass With Tin Plated
- With flange nut: Brass M2.5
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to $+105^{\circ}\text{C}$
- Soldering temperature: $250^{\circ}\text{C} \pm 10^{\circ}\text{C}/5\text{ Sec}$
- Safety Approval:

RoHS Compliant

PART NUMBER:

OSTVOXX1250

No. of Poles
04: 2x02 Poles
06: 2x03 Poles
: :
48 2x24 Poles

COLOR
0: Black
5: Green (Standard)
6: Blue
8: Grey



ON-SHORE TECHNOLOGY, INC.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE				OSTVO-3.50mm series with flange vertical 2x2p-2x24p			
PART NO.		OSTVOXX1250		DWG NO.		OSTVOXX1250.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
Shi Jun 2006.10.23	Marvin 2006.10.23	Marvin 2006.10.23	Marvin 2006.10.23			UNIT: mm	X ±0.50
				SHEET: 01/01		SCALE: NONE	X.X ±0.30
						REV: B	X.XX ±0.10
							X* ±1°