

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[On-Shore Technology, Inc.](#)
[OSTVO243250](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

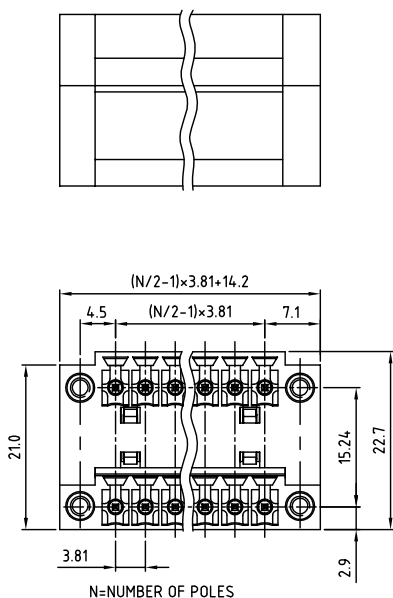

P.C.B LAYOUT

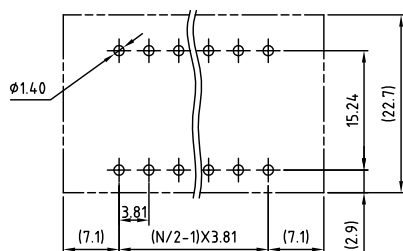

Material

- Contact: Brass With Tin Plated
- With flange nut: Brass M2.5
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6KV
- Operating temperature: -30° C to +105° C
- Soldering temperature: 250° C ±10° C/5 Sec
- Safety Approval:

RoHS Compliant

PART NUMBER:

OSTVOXX3250

No. of Poles

04: 2x02 Poles

06: 2x03 Poles

12: 2x06 Poles

24: 2x12 Poles

48: 2x24 Poles

COLOR

0: Black

5: Green (Standard)

6: Blue

8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTVO-3.81mm Series With flange vertical 2x2p-2x24p			
PART NO.	OSTVOXX3250	DWG NO.	OSTVOXX3250.DWG	Tolerance	
APPROVED	Shi Jun 2006.10.23	CHECKED	Marvin 2006.10.23	CUST NO.	
DESIGNED	Marvin 2006.10.23	DRAWN	Marvin 2006.10.23	UNIT:	mm
				SCALE:	NONE
				SHEET:	01/01
				REV:	B
				X	±0.50
				X.X	±0.30
				X.XX	±0.10
				X*	±1*