

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
142254](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
NC	11/08/99	INITIAL RELEASE
A	10/01/06	UPDATE DRAWING FORMAT

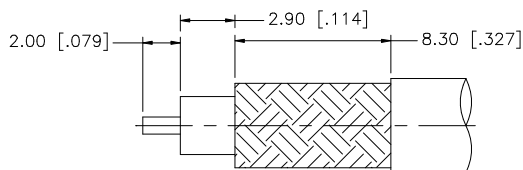

RECOMMENDED
CABLE STRIPPING DIM'S

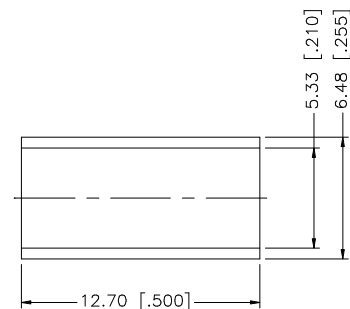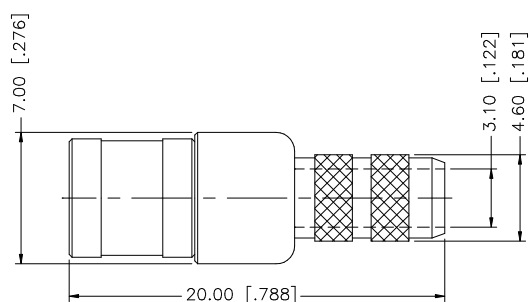

NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .213"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex SMB CRIMP PLUG (FOR RG-58/U CABLE)						
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	DRAWN	G.R.S.						10/01/06	PART DESCRIPTION
6						CHECKED								
5					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	ISSUED			PART NO.	142254				
4	FERRULE	COPPER	NICKEL	1		SHEET	1 OF 1							
3	CONTACT PIN	BER. COPPER	GOLD	1										
2	INSULATOR	TEFLON	NATURAL	1		CAD FILE			DWG. NO.	142254.DWG	REV. A	SIZE A	SCALE NA	
1	BODY	BRASS	NICKEL	1		C:/142/142254.DWG								
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING									