

Excellent Integrated System Limited

Stocking Distributor






Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
152102](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
A	04/31/03	UPDATE DRAWING FORMAT

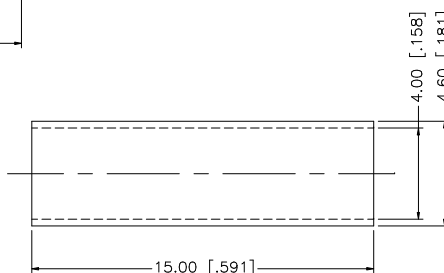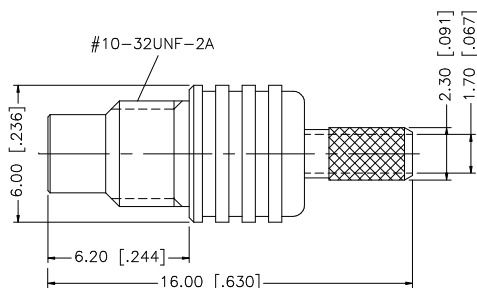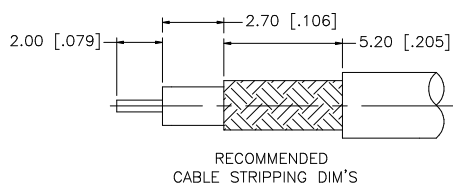

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
 2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE 0.7mm

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex PART DESCRIPTION SMC CRIMP JACK (FOR RG-174/U, 188A/U, 316/U) PART NO. 152102 DWG. NO. 152102.DWG REV. A SIZE A SCALE NA			
8				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:		DRAWN	G.R.S.	04/31/03					
7				0.5 - 8mm ± 0.20mm		CHECKED							
6				8 - 30mm ± 0.40mm		ISSUED							
5	HEAT SHRINK TUBE		BLACK	1	30 - 120mm ± 0.50mm	SHEET	1 OF 1						
4	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:								
3	CONTACT PIN	BRASS	GOLD	1	.020 - .315 = ± 0.007"								
2	INSULATOR	TEFLON	NATURAL	1	.315 - 1.180 = ± 0.015"								
1	BODY	BRASS	NICKEL	1	1.180 - 4.724 = ± 0.020"								
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE		C:/152/152102.DWG					