

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
112568](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
NC	02/21/03	INITIAL RELEASE

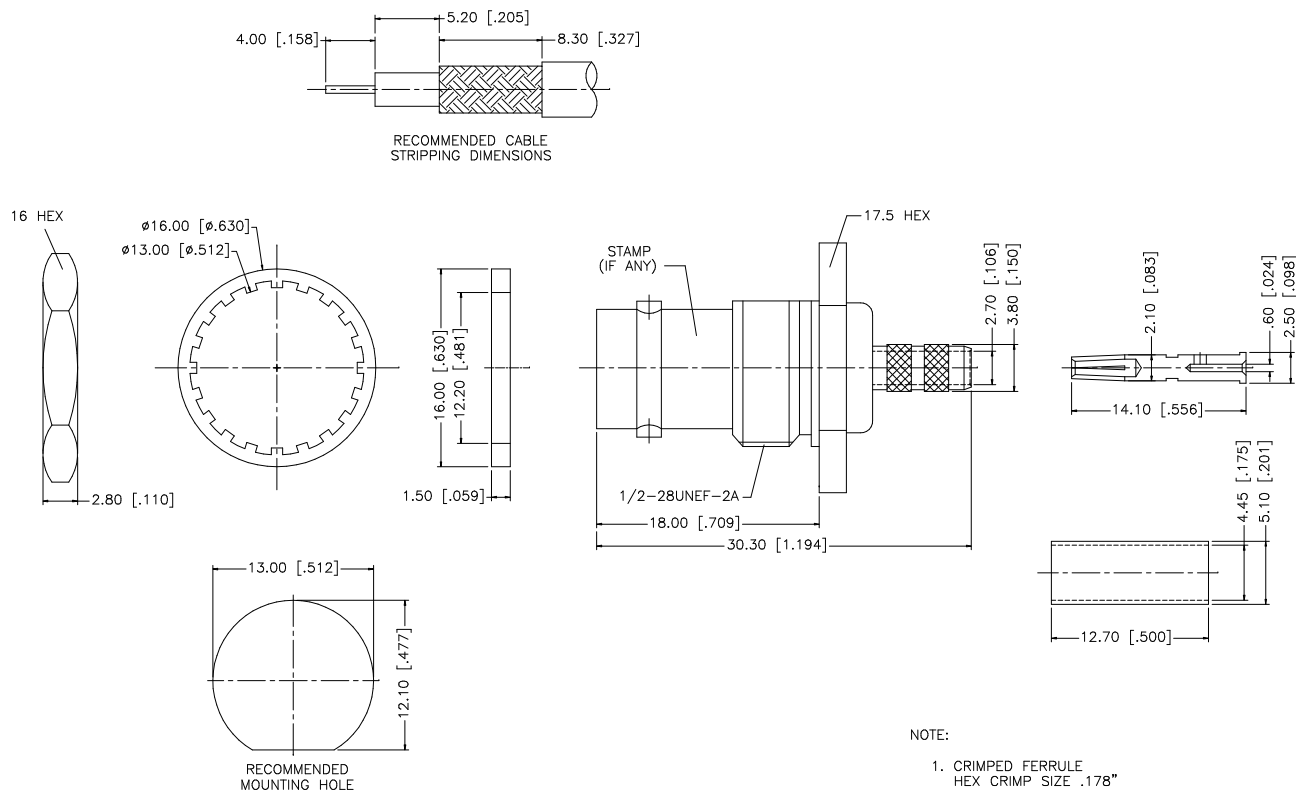

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 ± ± .0007" .315 – 1.180 ± ± 0.015" 1.180 – 4.724 ± ± 0.020"	APPROVALS	DATE	Amphenol Connex								
7	FERRULE	COPPER	NICKEL		1	DRAWN						G.R.S.	02/24/03		
6	HEX NUT	BRASS	NICKEL		1	CHECKED									
5	LOCK WASHER	BRASS	NICKEL		1	ISSUED			PART DESCRIPTION						
4	GASKET	RUBBER	RED		1				BNC BULKHEAD CRIMP JACK (FOR BELDEN 8218 CABLE)						
3	CONTACT PIN	PHOS. BRONZE	GOLD		1	SHEET	1 OF 1		PART NO.						
2	INSULATOR	TEFLON	NATURAL		1				112568						
1	BODY/HOUSING	BRASS	NICKEL		1										
	DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE			DWG. NO.	112568.DWG	REV.	NC	SIZE	A	SCALE	NA
					C:/112/112568.DWG										
					DO NOT SCALE DRAWING										