

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
132253](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	ECR NO.	DESCRIPTION
NC	02/17/00	—	INITIAL RELEASE
A	09/23/08	—	UPDATE DRAWING FORMAT

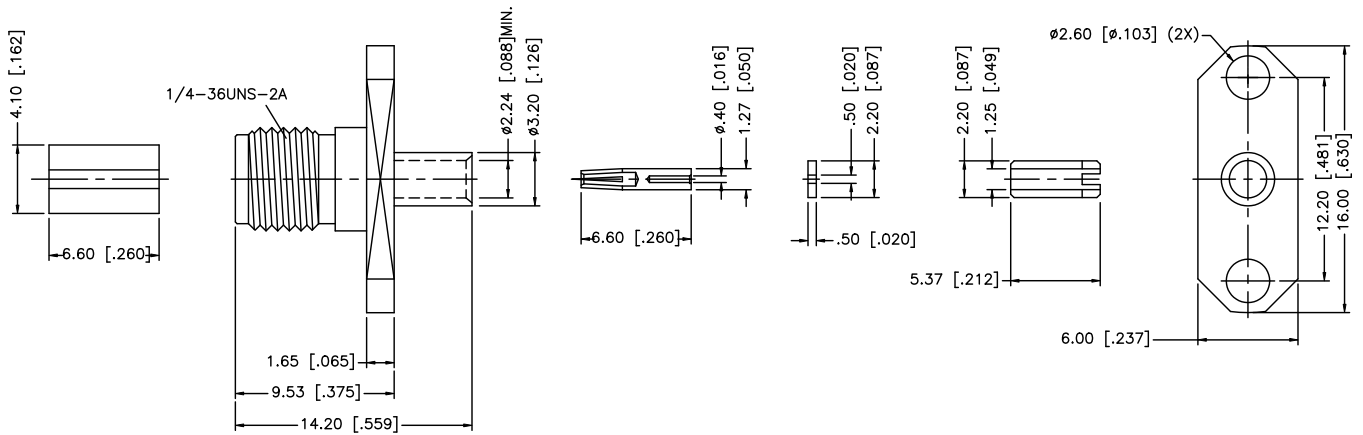

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex						
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	DRAWN	GRS						09/23/08	
6					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	CHECKED			PART DESCRIPTION SMA 2 HOLE PANEL JACK .047” SEMI-RIGID CABLE					
5	SOLDER BARREL	BRASS	GOLD	1	DO NOT SCALE DRAWING	ISSUED								
4	INSULATOR	PTFE	NATURAL	1		SHEET	1 OF 1		PART NO. 132253					
3	CONTACT PIN	BER. COPPER	GOLD	1										
2	INSULATOR	PTFE	NATURAL	1					DWG. NO. 132253.DWG					
1	BODY	BRASS	GOLD	1										
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE	C:/132/132253.DWG		REV.	A	SIZE	A	SCALE	NA