

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
132240](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
NC	12/08/01	INITIAL RELEASE
A	01/08/07	UPDATE DRAWING FORMAT

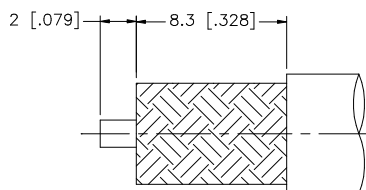

RECOMMENDED
CABLE STRIPPING DIM'S

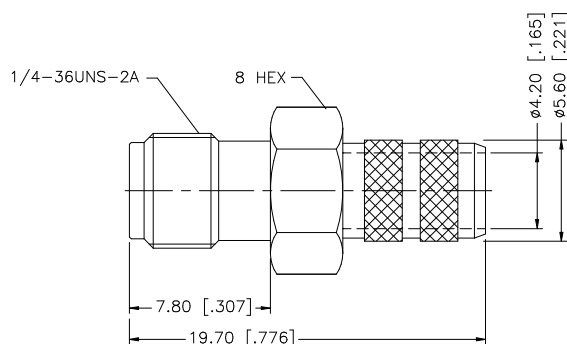

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .255.
2. CONTACT PIN TO SOLDER.

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex SMA CRIMP JACK (FOR RG-8/X, LMR240)									
8					DRAWN	G.R.S.	01/08/07											
7					CHECKED													
6					ISSUED				PART DESCRIPTION									
5											SMA CRIMP JACK (FOR RG-8/X, LMR240)							
4	FERRULE	COPPER	GOLD	1					PART NO.		132240							
3	CONTACT PIN	BER. COPPER	GOLD	1														
2	INSULATOR	TEFLON	NATURAL	1														
1	BODY	BRASS	GOLD	1														
	DESCRIPTION	MATERIAL	FINISH	QTY					CAD FILE		DWG. NO.		REV.	A	SIZE	A	SCALE	NA
					DO NOT SCALE DRAWING	C:/132/132240.DWG					132240.DWG							