

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
132279](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
A	05/10/01	MODIFY INSULATOR/CONTACT PIN DIMENSIONS
B	01/30/04	UPDATE DRAWING FORMAT

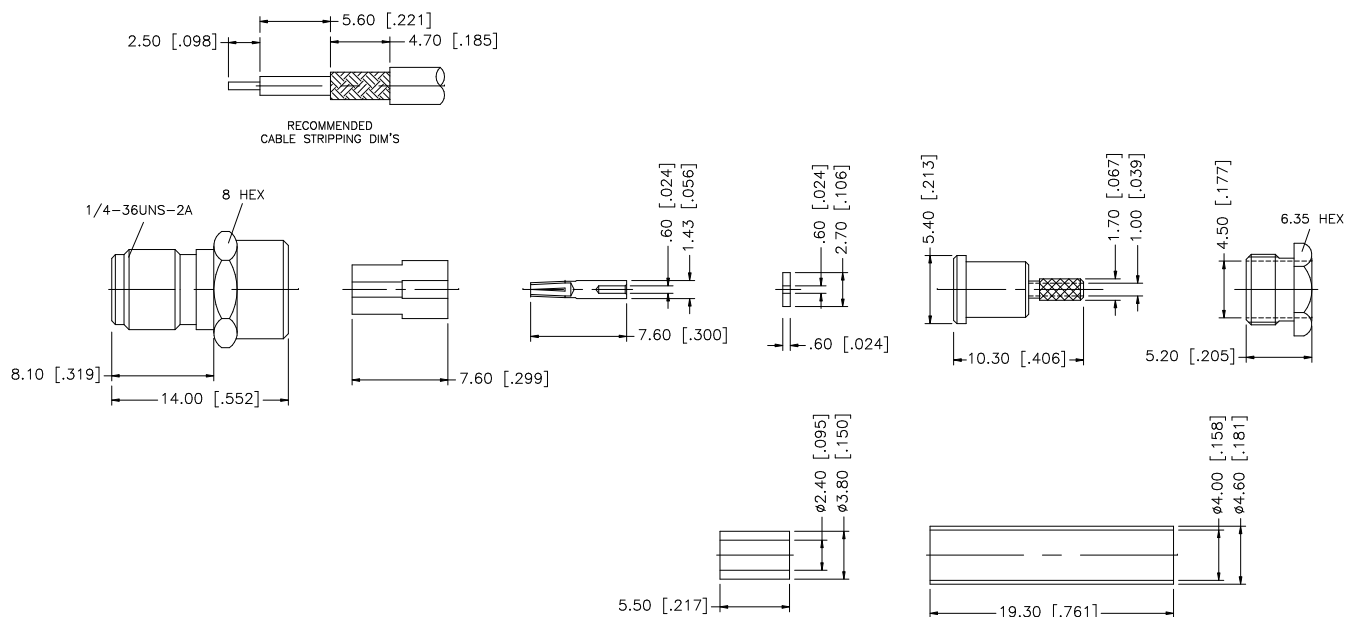

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex SMA CRIMP JACK (FOR RG-178B/U, 196A/U CABLE)								
8	HEAT SHRINK TUBE				1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm		DRAWN	G.R.S.	01/30/04										
7	FERRULE	COPPER	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 ± ± 0.007" .315 - 1.180 ± ± 0.015" 1.180 - 4.724 ± ± 0.020"		CHECKED			PART DESCRIPTION										
6	HEX NUT	BRASS	GOLD	1			ISSUED			PART NO.										
5	BARREL	BRASS	GOLD	1			SHEET	1 OF 1		132279										
4	INSULATOR	TEFLON	NATURAL	1					CAD FILE		DWG. NO.		132279.DWG	REV.	B	SIZE	A	SCALE	N	
3	CONTACT PIN	BER. COPPER	GOLD	1																
2	INSULATOR	TEFLON	NATURAL	1																
1	BODY	BRASS	GOLD	1																
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING				C:/132/132279.DWG											