

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)
[112146](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
NC	05/12/05	INITIAL RELEASE

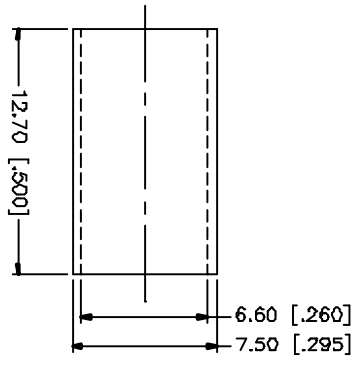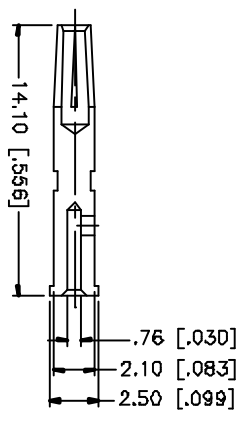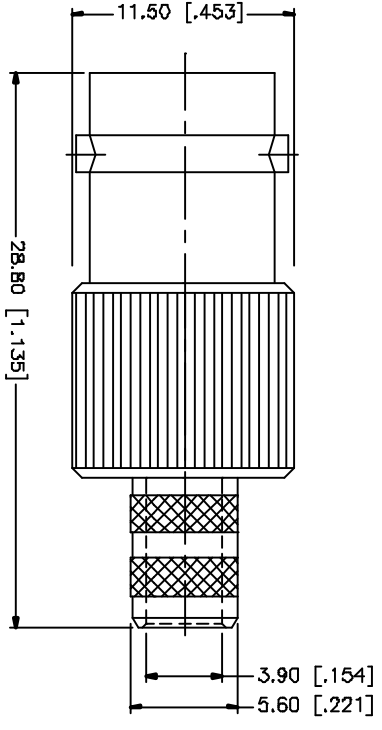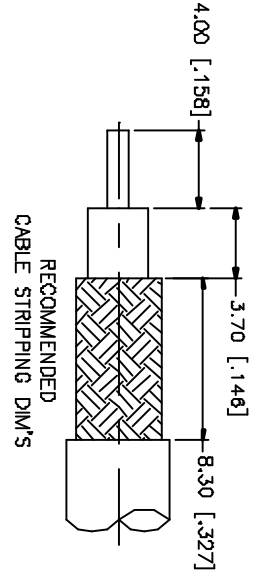

NOTE:
 1. CRIMPED FERRULE
 HEX CRIMP SIZE .213"
 2. CRIMPED CONTACT PIN
 HEX CRIMP SIZE .068"

QTY	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	APPROVALS	DATE	PART DESCRIPTION	
1	INSULATOR	TEFLON	NATURAL	1		DRAWN G.R.S.	05/12/05	Amphenol Connex BNC CRIMP JACK (FOR RG-59/U CABLE) 50ohms 112146	
1	HOUSING/BODY	BRASS	NICKEL	1		CHECKED			
1	CONTACT PIN	PHOS. BRONZE	GOLD	1		ISSUED			
1	FERRULE	BRASS	NICKEL	1		SHEET 1 OF 1			
1	DESCRIPTION			1		CAD FILE C:/112/112146.DWG			
				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND DECIMALS THEREOF. DIMENSIONS ARE TO BE TAKEN FROM THE DRAWING UNLESS OTHERWISE SPECIFIED. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLITERS ARE: 0.5 - 30mm ± 0.20mm 30 - 120mm ± 0.30mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.001" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"					
DWC NO		112146.DWG		REV	NC	SIZE	A	SCALE	NA