

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)
[142101](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	ECR NO.	DESCRIPTION
NC	05/13/11	XXXXXX	INITIAL RELEASE

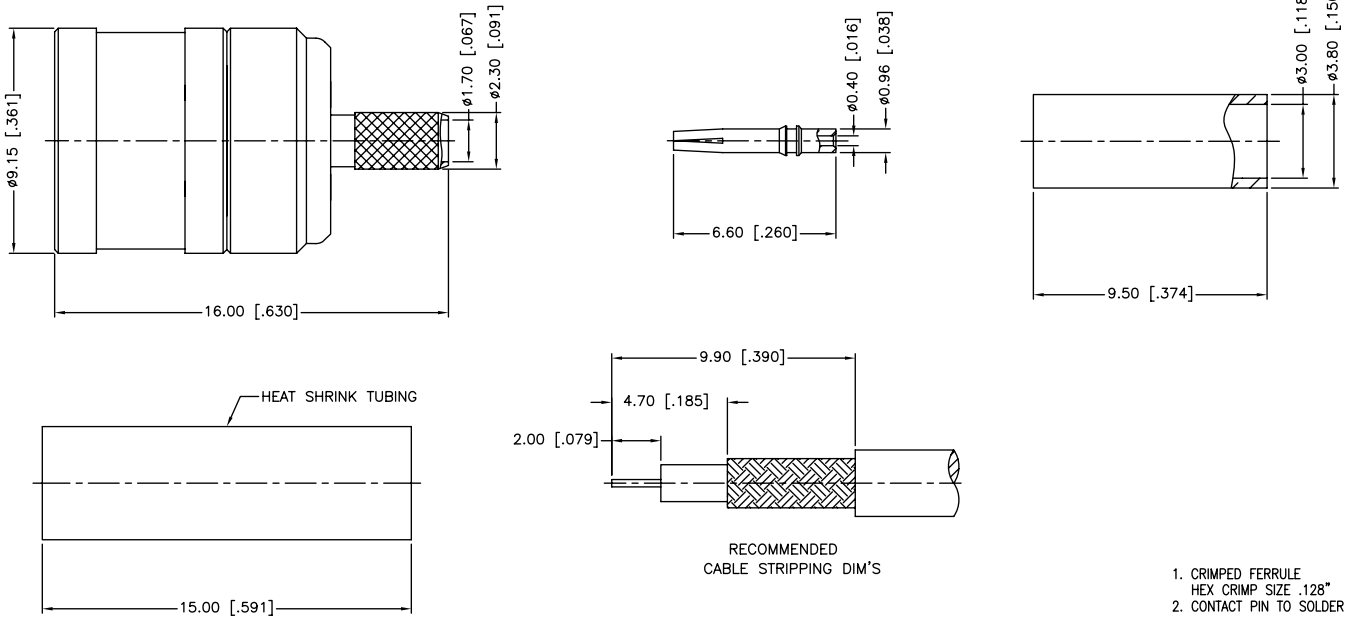

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex								
8	HEAT SHRINK TUBING		BLACK	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	DRAWN		M.ZHANG						05/13/11				
7	FERRULE	COPPER	NICKEL	1		CHECKED								PART DESCRIPTION				
6	CONTACT PIN	BURYLUM COPPER	GOLD	1		ISSUED								SMZ CRIMP PLUG (FOR RG-179/U, 187A/U CABLE)				
5	SHELL	BRASS	NICKEL	1		SHEET		1 OF 1		PART NO.								
4	RETAINER RING	BURYLUM COPPER	NATURAL	1							142101							
3	BARREL	BRASS	NICKEL	1			CAD FILE		C:/CONNEX/142101.DWG		DWG. NO.	142101.DWG	REV.	NC	SIZE	A	SCALE	NA
2	INSULATOR	PTFE	NATURAL	1														
1	BODY	BRASS	GOLD	1														
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING													