

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)
[222166](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

				REV.		DATE	DESCRIPTION
				NC		05/27/00	INITIAL RELEASE
				A		11/29/05	UPDATE DRAWING FORMAT

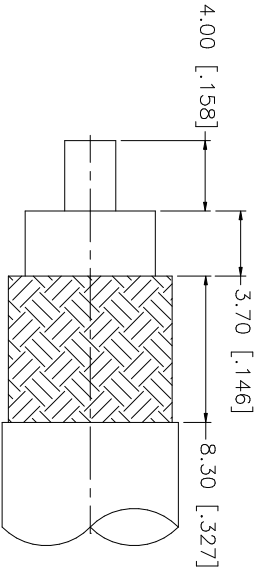

RECOMMENDED
CABLE STRIPPING DIM'S

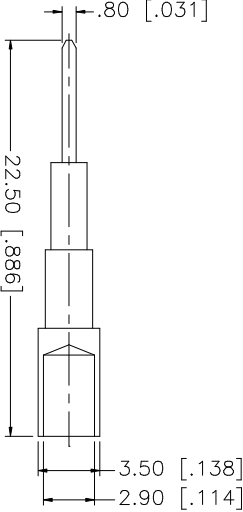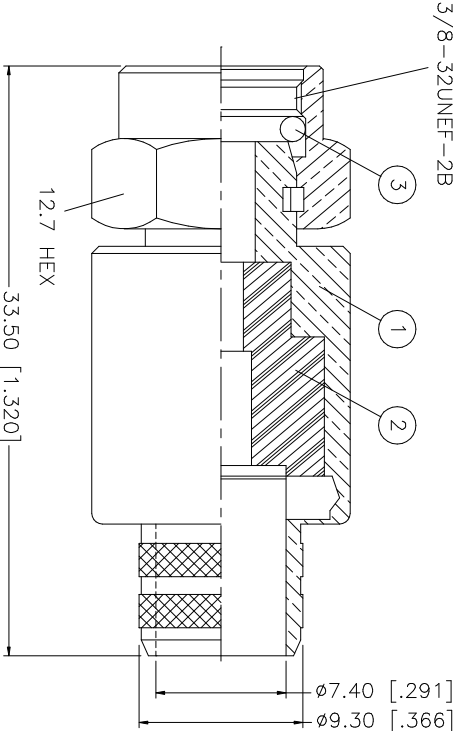

CRIMPING NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .429"

Amphenol Connex

F CRIMP PLUG
(FOR BELDEN 8214, 9913, LMR400 CABLE)

222166

8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"			
7							
6							
5	FERRULE	COPPER	NICKEL				
4	GASKET	SILICONE	BLACK				
3	CONTACT PIN	BRASS	GOLD				
2	INSULATOR	TEFLON	NATURAL	1			
1	BODY	BRASS	NICKEL	1			
DESCRIPTION				MATERIAL	FINISH	QTY	

DO NOT SCALE DRAWING

CAD FILE	C:\222\222166.DWG
DWG. NO.	222166.DWG
REV.	A
SIZE	A
SCALE	NA