

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)
[122163](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	ECR NO.	DESCRIPTION
NC	06/17/10	XXXXXX	INITIAL RELEASE

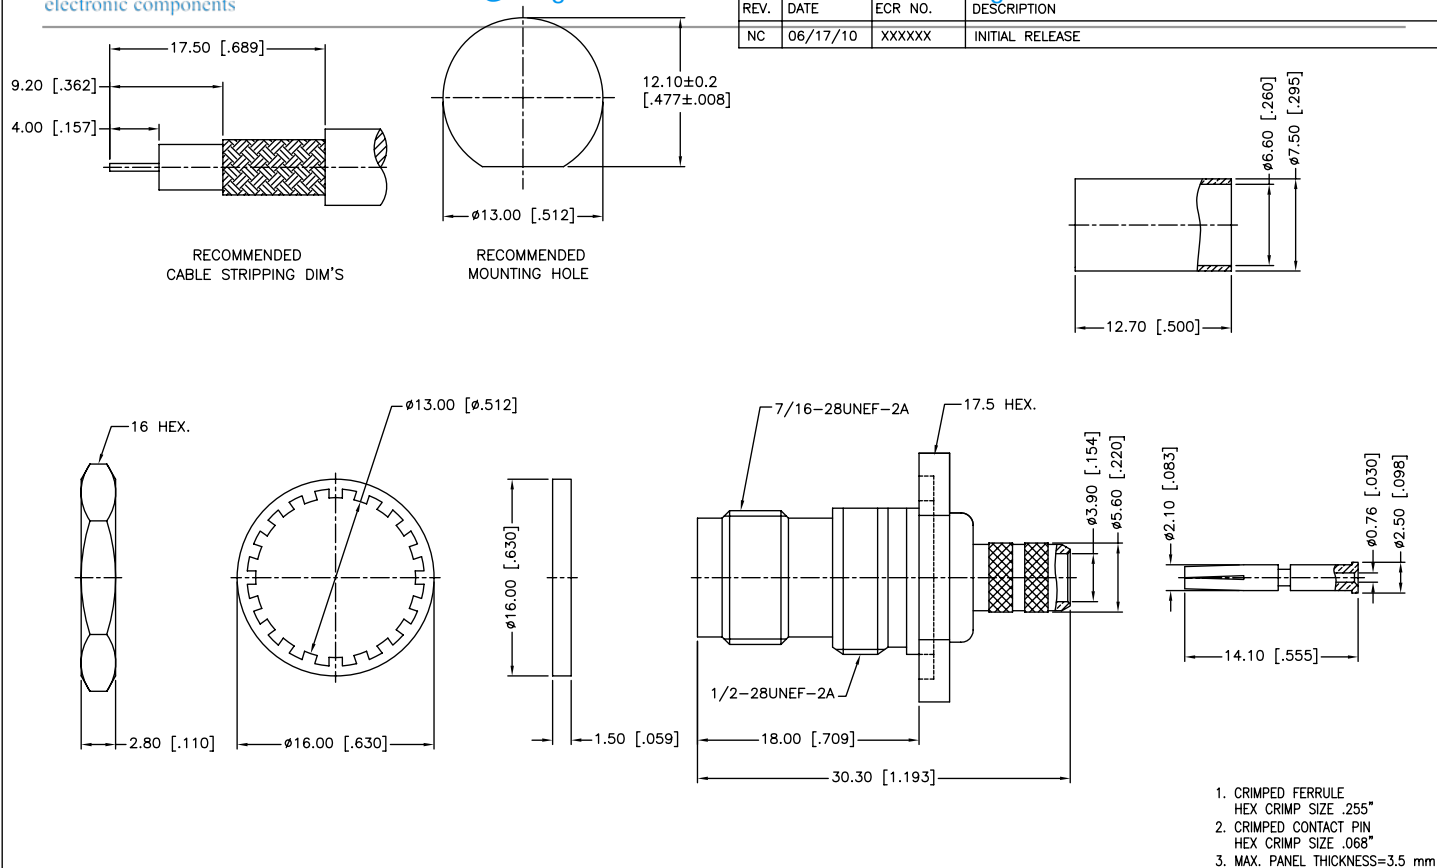

9	FERRULE	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex TNC BULKHEAD CRIMP JACK – 75 OHM (FOR RG-59/U CABLE)			
8	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1		DRAWN	M.ZHANG		06/17/10		
7	HUT HEX	BRASS	NICKEL	1		CHECKED					
6	LOCK WASHER	BRASS	NICKEL	1		ISSUED					
5	GASKET	RUBBER	RED	1		SHEET	1 OF 1				
4	BARREL	BRASS	NICKEL	1							
3	INSULATOR	PTFE	NATURAL	1							
2	BODY	BRASS	NICKEL	1							
1	HOUSING	BRASS	NICKEL	1							
	DESCRIPTION	MATERIAL	FINISH	QTY		DO NOT SCALE. DRAWING	CAD FILE		C:/CONNEX/122163.DWG	DWG. NO. 122163.DWG	REV. NC