

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
142252](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
NC	02/24/03	INITIAL RELEASE

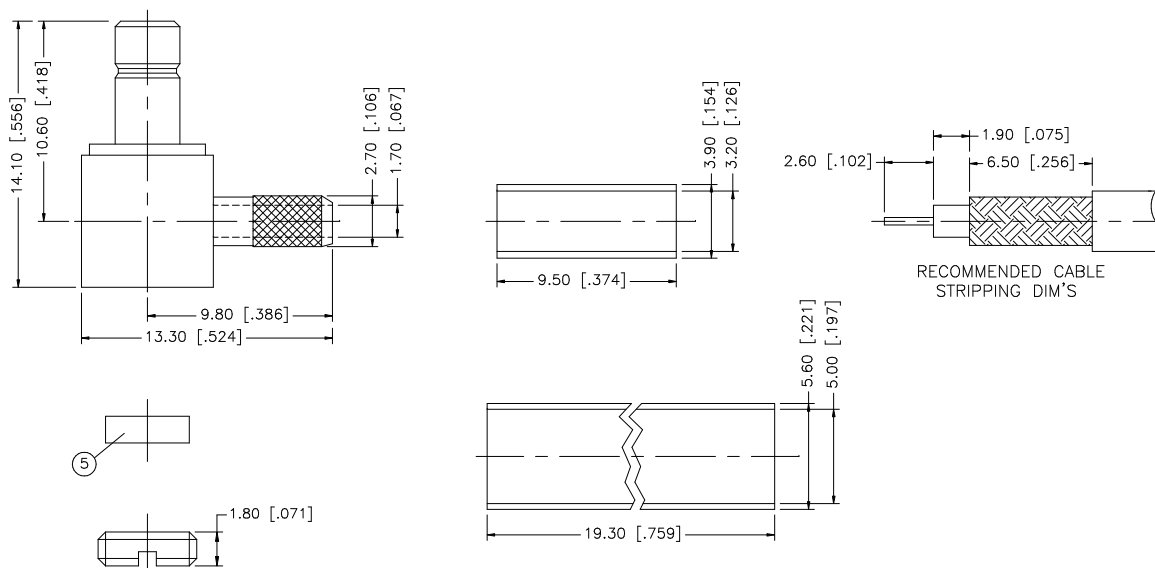

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

8	HEAT SHRINK TUBE			1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 ± 0.007" .315 – 1.180 ± 0.015" 1.180 – 4.724 ± 0.020"	APPROVALS	DATE	Amphenol Connex										
7	FERRULE	COPPER	GOLD	1		DRAWN	G.R.S.							02/24/03				
6	COVER	BRASS	GOLD	1		CHECKED			PART DESCRIPTION SMB R/A CRIMP JACK (FOR RG-174/U, 188A/U, 316/U CABLE)									
5	INSULATOR	P.E.	NATURAL	1		ISSUED												
4	INSULATOR	TEFLON	NATURAL	1		SHEET	1 OF 1		PART NO. 142252									
3	CONTACT PIN	BRASS	GOLD	1														
2	BARREL	BRASS	GOLD	1					CAD FILE C:/142/142252.DWG DWG. NO. 142252.DWG REV. NC SIZE A SCALE NA									
1	BODY	BRASS	GOLD	1														
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING													