

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[OSTTN101900](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

1	2	3	4	5	6	7
SIGN		DATE		DESCRIPTION		APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!						

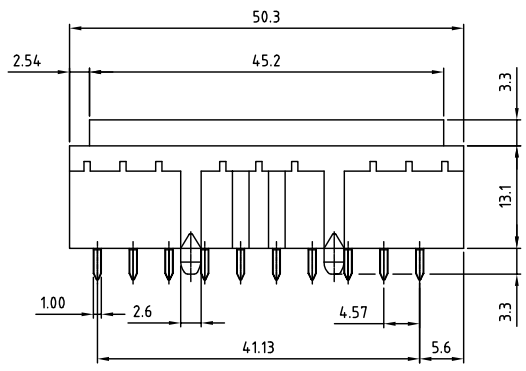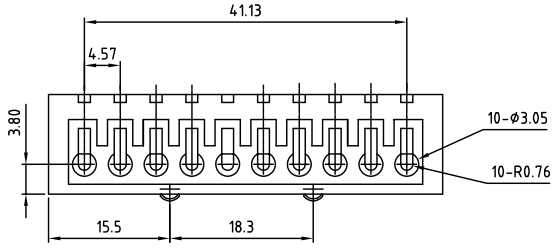

Material

- Terminal body (Contact pin): PhBz
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus/VDE

- Voltage rating: 300VAC/250VAC
- Current rating: 2A/2A
- Wire range: 0.5-0.75mm²
- Solid wire(AWG): 18
- Stranded wire(AWG): 18
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:

RoHS Compliant

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

		TITLE: OSTTN-4.57mm Series 10P W/o cover			
		PART NO. OSTTN101900	DWG NO. OSTTN101900.DWG	Tolerance	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
	Marvin 2008.03.13	Marvin 2006.08.21	Marvin 2006.08.21		
					UNIT: mm SCALE: NONE
				SHEET: 01/01	REV.: B
				X	±0.50
				X.X	±0.30
				X.XX	±0.10
				X*	±1°