

Excellent Integrated System Limited






Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[OSTTN062920](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

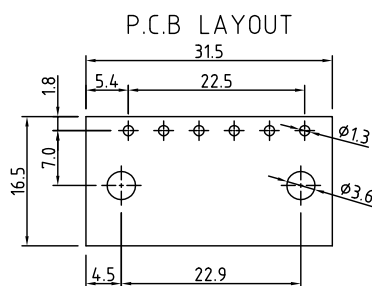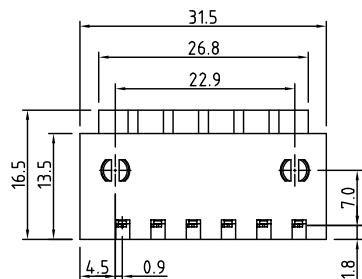

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material

- Terminal body (Contact pin): PhBz
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus/VDE

- Voltage rating: 250VAC
- Current rating: 2A
- Wire range: 0.5-0.75mm²
- Solid wire(AWG):
- Stranded wire(AWG):
- Wire strip length: 6-7mm
- Withstanding Voltage: 2KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:

RoHS Compliant

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

ON-SHORE TECHNOLOGY, INC.									
TITLE	OSTTN-4.5mm Series 6P With cover								
PART NO.	OSTTN062920	DWG NO.	OSTTN062920.DWG						
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance				
	Marvin 2008.03.14	Marvin 2006.08.21	Marvin 2006.08.21		X ±0.50				
					X.X ±0.30				
					X.XX ±0.10				
					X* ±1*				
					UNIT: mm				
					SCALE: NONE				
					SHEET: 01/01				
					REV: B				