

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[On-Shore Technology, Inc.](#)
[OSTTP022150](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

1	2	3	4	5	6	7
SIGN		DATE		DESCRIPTION		APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!						

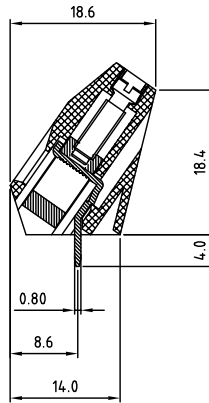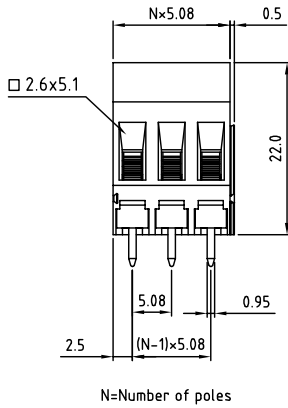

P.C.B LAYOUT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

Material

- Terminal body
- (metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Contacts: Brass
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range: Solid wire(AWG): 12-24 Stranded wire(AWG): 12-24
- Torque(Lb-In): 3.5
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:

RoHS Compliant

PART NUMBER:

OSTTPXX2180

No. of Poles	COLOR
02 2 Poles	0: Black
03 3 Poles	5: Green
...	6: Blue
24 24 Poles	8: Grey (Standard)



TITLE		OSTTP 5.08mm series		DWG NO.		OSTTPXX2180.DWG	
PART NO.	OSTTPXX2180	CUST NO.		Tolerance			
APPROVED	CHECKED	DESIGNED	DRAWN	UNIT: mm		X ±0.50	
Shi Jun 2006.10.20	Shi Jun 2006.10.20	xionghaitao 2006.10.20	xionghaitao 2006.10.20	SCALE: NONE		X.X ±0.30	
SHEET: 01/01				REV: D		X.XX ±0.10	
						X* ±1°	