

Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[OSTTS02015D](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

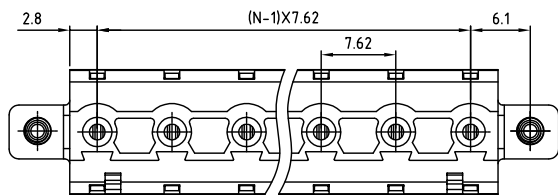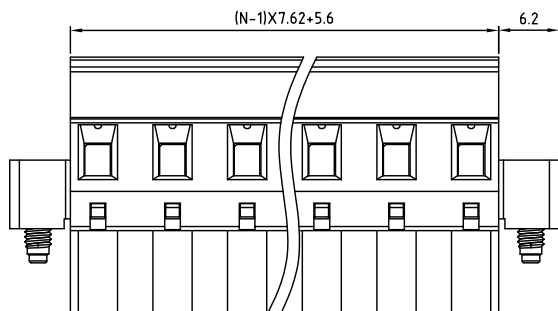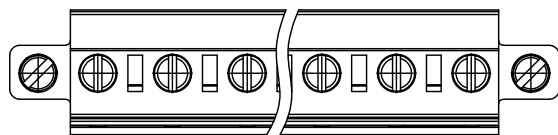

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!!	Marvin

Material

- Terminal body(metal housing): Brass(CuZn)
- With Flange screw :Steel M2.5
- Terminal screw: Steel Zinc plating "- " slot type
- Wire guard: PhBz Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 15A
- Wire range:
 - Solid wire(AWG): 12-24
 - Stranded wire(AWG): 12-24
- Torque: 3.5Lb-In
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Safety Approval: cULus

RoHS Compliant

PART NUMBER:

OSTTSXX015D

No. of Poles
02 2 Poles
03 3 Poles
... ..
16 16 Poles

COLOR
0: Black
5: Green (Standard)
6: Blue
8: Grey

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

 ON-SHORE TECHNOLOGY, INC.									
TITLE		OSTTS 7.62mm Series hook on back side With flange 2p-16p							
PART NO.		OSTTSXX015D			DWG NO.		OSTTSXX015D.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		UNIT: mm	Tolerance		
							X	±0.50	
Shi Jun 2006.11.11	Shi Jun 2006.11.11	Shi Jun 2006.02.27	Shi Jun 2006.02.27			SCALE: NONE	X.X	±0.30	
						SHFFT: 01/01	X.XX	±0.10	
							X*	±1*	