

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[On-Shore Technology, Inc.](#)
[OSTTS02A15C](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

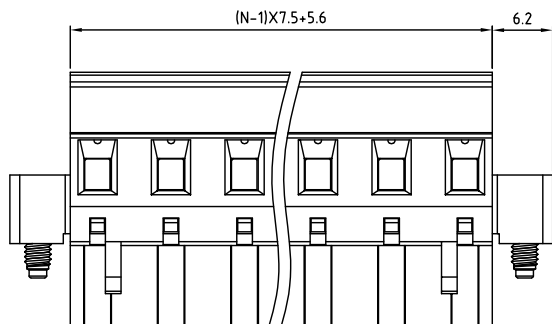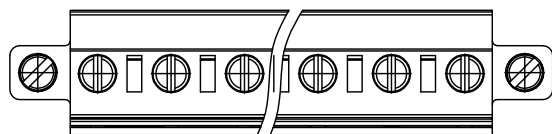

N=Number of poles

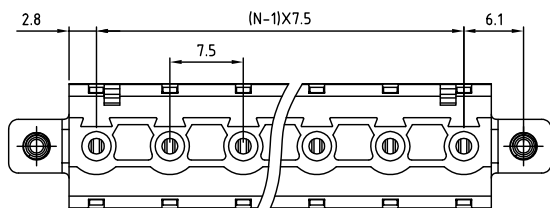

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material

- Terminal body(metal housing): Brass(CuZn)
- With Flange screw :Steel M2.5
- Terminal screw: Steel Zinc plating "- " slot type
- Wire guard: PhBz Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 15A
- Wire range:
 - Solid wire(AWG): 12-24
 - Stranded wire(AWG): 12-24
- Torque: 3.5Lb-In
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Safety Approval:

RoHS Compliant

PART NUMBER:

OSTTSXXA15C

No. of Poles	COLOR
02 2 Poles	0: Black
03 3 Poles	5: Green (Standard)
...	6: Blue
16 16 Poles	8: Grey



TITLE		OSTTS 7.5mm Series hook on entry side With flange 2p-16p	
PART NO.	OSTTSXXA15C	DWG NO.	OSTTSXXA15C.DWG
APPROVED	CHECKED	DESIGNED	DRAWN
Shi Jun 2006.11.11	Shi Jun 2006.11.11	姜勇福 2006.02.27	姜勇福 2006.02.27
SHEET: 01/01		REV: B	
UNIT: mm		Tolerance	
SCALE: NONE		X ±0.50	
		X.X ±0.30	
		X.XX ±0.10	
		X* ±1*	