

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)

[OSTTY020100](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

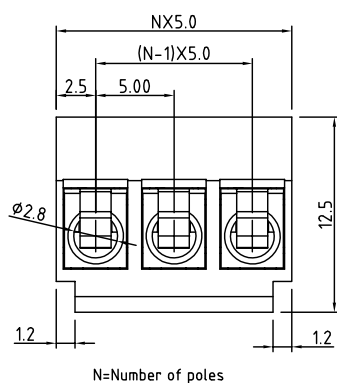

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material

- Terminal body
- (metal housing): Brass (Cu Zn)
- Terminal screw: Steel Zinc plating "-" slot type
- Wire guard: PhBz,tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
 - Solid wire(AWG): 14-26
 - Stranded wire(AWG): 14-26
- Torque(Lb-In): 3.5
- Screw: M2.6
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Safety Approval: RoHS Compliant

PART NUMBER:

OSTTYXX0100

No. of Poles
02: 2 Poles
:
24: 24 Poles

COLOR
0: Black (Black)
5: Green
6: Blue
8: Grey



ON-SHORE TECHNOLOGY, INC.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTTY-5.0mm Series	
PART NO.	OSTTYXX0100	DWG NO.	OSTTYXX0100.DWG
APPROVED	Shi Jun 2006.10.23	CHECKED	Shi Jun 2006.10.23
DESIGNED	xionghaitao 2006.01.25	DRAWN	xionghaitao 2006.01.25
		CUST NO.	
		UNIT:	mm
		SCALE:	NONE
		SHEET:	01/01
		REV:	C
		Tolerance	X ±0.50 X.X ±0.30 X.XX ±0.10 X* ±1*