

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[On-Shore Technology, Inc.](#)
[OSTV7020250](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

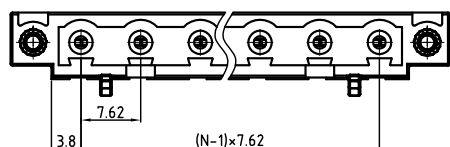

N=Number of poles

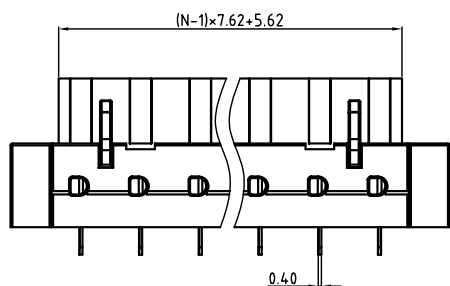

Material

- Wire guard: PhBz(CuSn)
- Surface of solder tail: Tin plated
- With Flange Nut Brass M2.5
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6kv
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: US

RoHS Compliant


PART NUMBER:

OSTV7XX0250

No. of Poles
02 2 Pole
03 3 Pole
... ..
16 16 Pole

COLOR
0: Black
5: Green (Standard)
6: Blue
8: Light Grey

P.C.B LAYOUT

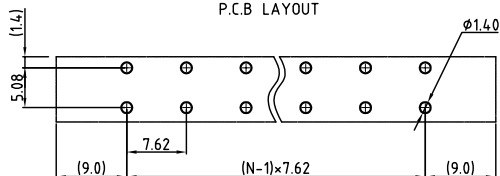

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



ON-SHORE TECHNOLOGY, INC.

TITLE		OSTV7 7.62mm Series W/F 180° Vertical 2p-16p			
PART NO.	OSTV7XX0250	DWG NO.	OSTV7XX0250.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
Shi Jun 2006.11.11	Shi Jun 2006.11.11	Tason 2006.08.04	Tason 2006.08.04		X ±0.5 X.X ±0.3 X.XX ±0.1 X* ±1°
SHEET: 01/01		REV: C		UNIT: mm SCALE: 0.2500	