

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0003092061](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

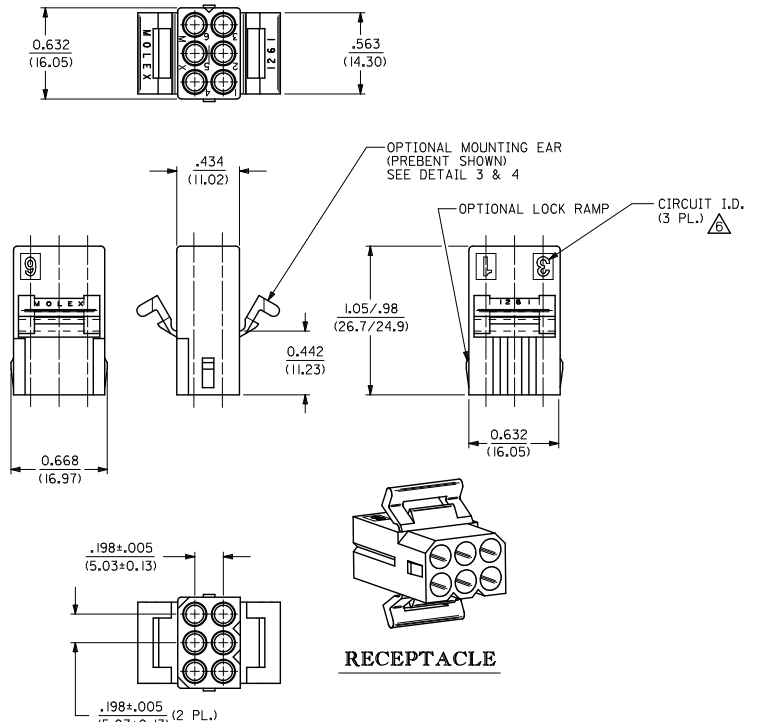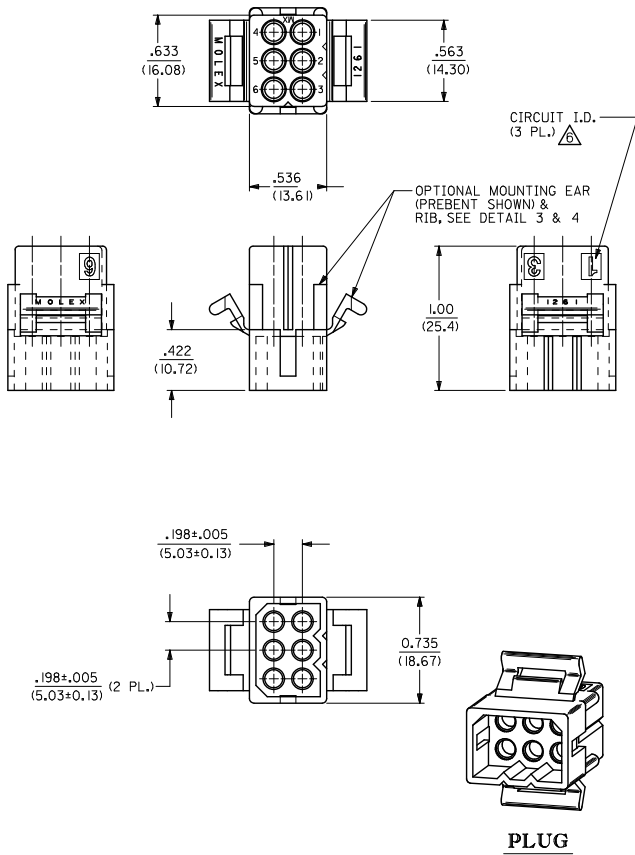

UPDATE REV. LEVEL		DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	TITLE	
EC NO:	DATE		▽=0	mm	INCH	IN/MM	DATE	2:1	INCH	INCH		
1525	2010/11/23	DRW: AELHAG	▽=0	4 PLACES ± .010	± .007	AELHAG	2010/11/23				.093/(2.36) HOUSING, PLUG AND RECEPTACLE, 6 CKT., .198/(5.03) CTRS.	
	2010/11/24	CHKD: JELL	▽=0	3 PLACES ± .010	± .007	JBELL	2010/11/24					
	2010/12/03	APPR: SMITH		2 PLACES ± .018	± 0.10		2010/12/03					
				1 PLACE ± .025	± 2 °	FSMITH	2010/12/03					
				ANGULAR ± 2 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-1261-*		1 OF 2		
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

PLUG		RECEPTACLE	
PART NO.	ENG. NO.	PART NO.	ENG. NO.
03-09-2061	I261-P	03-09-1061	I261-R
23-09-2061	I261-P-100	23-09-1061	I261-R-100
03-09-2062	I261-P1	03-09-1062	I261-R1
23-09-2062	I261-P1-100	23-09-1062	I261-R1-100
03-09-7061	I261-PBK	03-09-1063	I261-R2
03-09-7062	I261-P1BK	23-09-1063	I261-R2-100
27-09-2093	I261-P1-200	03-09-1064	I261-R3
		27-09-1063	I261-R2-200
		03-09-6064	I261-R3BK
		03-09-6063	I261-R2BK
		03-09-6062	I261-R1BK
		03-09-6061	I261-RBK

LEGEND: PLUG

I261-P***-***
P = PLUG
BLANK = PLUG WITH PREBENT MOUNTING EARS
I = PLUG WITHOUT MOUNTING EARS

COLOR: BLANK=NATURAL COLOR
AM=AMBER BK=BLACK BU=BLUE
BN=BROWN GY=GRAY GN=GREEN
OR=ORANGE RD=RED YW=YELLOW



MATERIAL: BLANK = NYLON 6/6, U.L. 94V-2
100 = POLYPROPYLENE, U.L. 94V-0
200 = NYLON 6/6, U.L. 94V-0, RED

LEGEND: RECEPTACLE

I261-R***-***
R = RECEPTACLE
BLANK = WITH STD. MOUNTING EARS, WITH LOCK RAMPS
1 = WITH STD. MOUNTING EARS, WITHOUT LOCK RAMPS
2 = WITHOUT MOUNTING EARS, WITHOUT LOCK RAMPS
3 = WITHOUT MOUNTING EARS, WITH LOCK RAMPS
4 = WITH PREBENT MOUNTING EARS, WITH LOCK RAMPS
5 = WITH PREBENT MOUNTING EARS, WITHOUT LOCK RAMPS

COLOR: BLANK=NATURAL COLOR
AM=AMBER BK=BLACK BU=BLUE
BN=BROWN GY=GRAY GN=GREEN
OR=ORANGE RD=RED YW=YELLOW

MATERIAL: BLANK = NYLON 6/6, U.L. 94V-2
100 = POLYPROPYLENE, U.L. 94V-0
200 = NYLON 6/6, U.L. 94V-0, RED

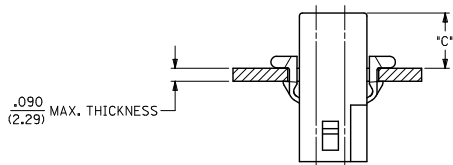


MOUNTING HOLE CUTOUT

HOUSING	DIM. "A"	DIM. "B"	DIM. "C" (STD. EAR)	DIM. "C" (PREBENT)
PLUG	.750/(19.05)	.695/(17.65)	.39/(9.9)	.40/(10.1)
RECEPTACLE	.718/(18.24)	.600/(15.24)	.40/(10.1)	.41/(10.3)


NOTES:

- MATERIAL: SEE LEGEND
- FINISH: NONE
- PRODUCT SPECIFICATION: PS-43660-9999
- PACKAGING INFORMATION: PK-1261-001
- HOUSINGS FOR USE WITH MOLEX .093/(2.36) PIN AND SOCKET TERMINALS.
- CIRCUIT I.D. NUMBERS ON SIDE OF HOUSING APPEAR ON PARTS FROM TOOLS BUILT AFTER 9/3/91.
- WHERE DENOTED IN CHART, TOOLS ARE BUILT WITH PREBENT MOUNTING EARS PER DETAIL 4 AND SUPERSEDE ALL TOOLS PREVIOUSLY BUILT WITH THE STANDARD MOUNTING EAR.
- TEXT AND CIRCUIT IDENTIFIERS ARE SHOWN IN APPROXIMATE LOCATION BUT MAY VARY TO ACCOMMODATE TOOLING.



DETAIL 3

.093/(2.36) STANDARD MOUNTING EAR
(SCALE 4:1)



DETAIL 4

.093/(2.36) PREBENT MOUNTING EAR
(SCALE 4:1)

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	mm	INCH	IN/MM	DATE				
▽=0	4 PLACES ± .005	± .005	AELHAG	2010/11/23	4:1	INCH	THIRD ANGLE PROJECTION	
▽=0	3 PLACES ± .007	± .007	CHECKED BY	DATE				
	2 PLACES ± 0.18	± .010	JBELL	2010/11/24				
	1 PLACE ± 0.25	± .010	APPROVED BY	DATE				
	ANGULAR ± 2 °		FSMITH	2010/12/03	MOLEX INCORPORATED			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART		SD-1261-*		SHEET NO. 2 OF 2	
			SIZE (	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				