

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[On-Shore Technology, Inc.](#)
[OSTV7025150](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

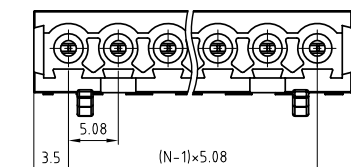

N=Number of poles

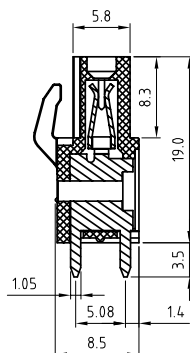

P.C.B LAYOUT

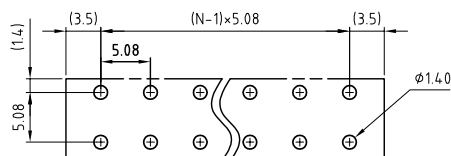

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material

- Wire guard: PhBz(CuSn)
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 20A
- Withstanding Voltage: 1.6kv
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 

RoHS Compliant

PART NUMBER:

OSTV7XX5150

No. of Poles	COLOR
02 2 Pole	0: Black
03 3 Pole	5: Green (Standard)
...	6: Blue
24 24 Pole	8: Light Grey



TITLE					
OSTV7 5.08mm Series 180° Vertical 2P-24P					
PART NO.	OSTV7XX5150			DWG NO.	OSTV7XX5150.DWG
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
Shi Jun 2006.11.11	Shi Jun 2006.11.11	Tason 03/04 '06	Tason 03/04 '06		UNIT: mm SCALE: NONE
				SHEET: 01/01	REV: B
					X ±0.5 X.X ±0.3 X.XX ±0.1 X* ±1°