

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)



[OSTVD023150](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

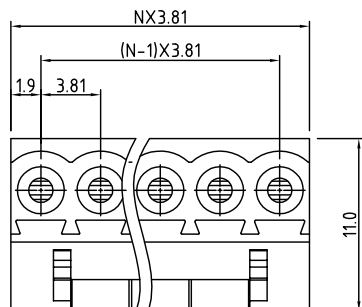

N=Number of poles



SIGN	DATE	DESCRIPTION	APPROVER
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Terminal body: Brass(CuZn)
- Wire guard: PhBz(CuSn),tin plated
- Terminal screw: Steel Zinc plating"-slot type
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300V
- Current rating: 8A
- Wire range: Solid wire(AWG): 16-28
Stranded wire(AWG): 16-28
- Torque(Lb-In): 1.7
- Screw: M2
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Safety Approval:

RoHS Compliant

PART NUMBER:

OSTVDXX3150

No. of Poles

02: 2 Poles
:
24: 24 Poles

COLOR

0: Black
5: Green (Standard)
6: Blue
8: Grey



ON-SHORE TECHNOLOGY, INC.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE				OSTVD-3.81 series 2p-24p			
PART NO.	OSTVDXX3150			DWG NO.	OSTVDXX3150.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
Shi Jun 2006.10.23	Shi Jun 2006.10.23	Shi Jun 2006.01.18	Shi Jun 2006.01.18		UNIT: mm	X	±0.50
					SCALE: NONE	X.X	±0.30
						X.XX	±0.10
						X*	±1°

SHEET: 01/01

REV.: C