

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[On-Shore Technology, Inc.](#)
[OSTVE023051](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



N=Number of poles

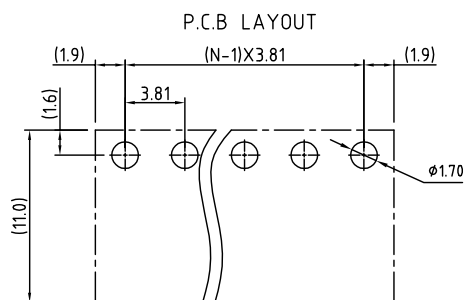

SIGN	DATE	DESCRIPTION	APPROVER
△	10.25'06	Standard spec is changed.	Marvin
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!!			

Material

- Terminal body(Contact pin): Brass with Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

cULus

- Voltage rating: 300V
- Current rating: 8A
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C ±10°C/5 Sec
- Safety Approval:

RoHS Compliant

PART NUMBER:

OSTVEXX3051

No. of Poles
02: 2 Poles
:
24: 24 Poles

COLOR
0: Black
5: Green (Standard)
6: Blue
8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTVE-3.81mm Series open right-angle 2p-24p	
PART NO.	OSTVEXX3051	DWG NO.	OSTVEXX3051.DWG
APPROVED	CHECKED	DESIGNED	DRAWN
Shi Jun 2006.10.25	Marvin 2005.10.25	Marvin 2005.10.25	Marvin 2005.10.25
SHEET: 01/01		REV.: D	
UNIT: mm		Tolerance	
SCALE: NONE		X ±0.50	
		X.X ±0.30	
		X.XX ±0.10	
		X* ±1°	