

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[On-Shore Technology, Inc.](#)
[OSTVM027552](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

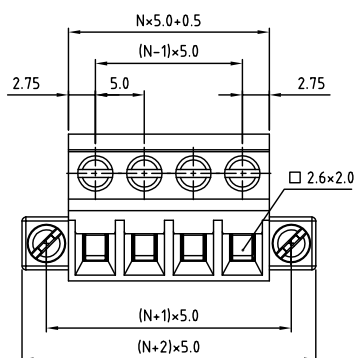

N=Number of poles

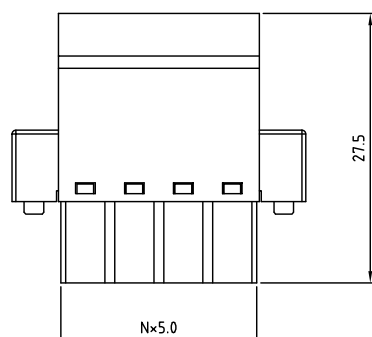

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material:

- Terminal body
- (metal housing): Steel
- Terminal screw: Steel Zinc plating "--" slot type.
- Wire guard: PhBz(CuSn), Tin plated.
- Insulator(housing): Thermoplastic (UL94V-0)
- With flange screw: Steel Zinc plated, M2.5

Electrical:

- cULus / TUV
- Voltage rating: 300V / 300V
- Current rating: 20A / 20A
- Wire range: 0.34~2.5mm²
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque: 3.5 Lb-In / 0.4N.m
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV / 2.5KV
- Operating temperature: -30°C to +105°C
- Safety Approval: RoHS Compliant

PART NUMBER:

OSTVMXX7552

No. of Poles	COLOR
02 2 Poles	0: Black
03 3 Poles	5: Green (Standard)
...	6: Blue
24 24 Poles	8: Grey

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

ON-SHORE TECHNOLOGY, INC.							
TITLE	OSTVM 5.0mm Series W/Flange						
PART NO.	OSTVMXX7552		DWG NO.	OSTVMXX7552.DWG			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
Shi Jun 2006.10.25	Shi Jun 2006.10.25	Tony 2006.10.25	Tony 2006.10.25		UNIT: mm	X	±0.50
					SCALE: NONE	X.X	±0.30
				SHEET: 01/01	REV: D	X.XX	±0.10
						X*	±1°