

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[On-Shore Technology, Inc.](#)
[OSTHP245050](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

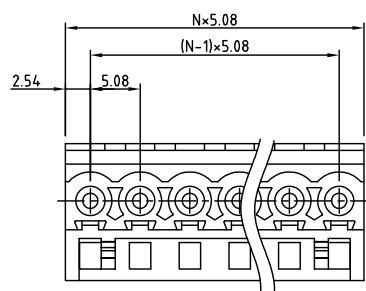

POLE	TOL
2 pole~5 pole	±0.05
6 pole~8 pole	±0.10
9 pole~12 pole	±0.20



N=Number of poles



SIGN	DATE	DESCRIPTION	APPROVER
△	2009.01.21	AWG changed from 20-22 to 18-22AWG(Str/sol)	Lee
△	2009.01.21	CUL approval added	Lee

MATERIAL

- Terminal Body(Contact pin): PhBz
- Insulator (housing): Thermoplastic(UL94V-0)

ELECTRICAL

- Voltage rating: 300V
- Current rating: 7A
- △ Wire range:
 - Solid wire(AWG): 18-22
 - Stranded wire(AWG): 18-22
- Wire strip length:
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- △ Safety Approval: US

RoHS Compliant

PART NUMBER:

OSTHPXX5050

No. of Poles
02: 2 Poles
⋮
24: 24 Poles

COLOR
0: Black
5: Green (Standard)
6: Blue
8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTHP 5.08mm Series without flange	
PART NO.	OSTHPXX5050	DWG NO.	OSTHPXX5050.DWG
APPROVED	CHECKED	DESIGNED	DRAWN
Shi Jun 2006.11.13	Marvin 2006.11.13	Marvin 2006.11.13	Marvin 2006.11.13
SHEET: 01/01		REV: D	
UNIT: mm		Tolerance	
SCALE: NONE		X ±0.50	
		X.X ±0.30	
		X.XX ±0.10	
		X* ±1°	